


M A T E R I A L S	BNC CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	SILVER PLATED
	INSULATORS	PTFE
E L E C T R O N I C S	RF INPUT CONNECTOR	BNC MALE
	RF OUTPUT CONNECTOR	BNC FEMALE
	IMPEDANCE (OHM)	75
	FREQUENCY RANGE	100 KHz - 1 GHz
	VSWR (MAX)	1.30:1
	INPUT POWER (dBm)	+20
	VIDEO CAPACITANCE (pF)	1000
	DC OUTPUT POLARITY	POSITIVE
	TANGENTIAL SENSITIVITY (dBm MIN)	-40
	OPERATING TEMP. RANGE (°C)	-20 to +85



BRACKE
Bracke Manufacturing, LLC

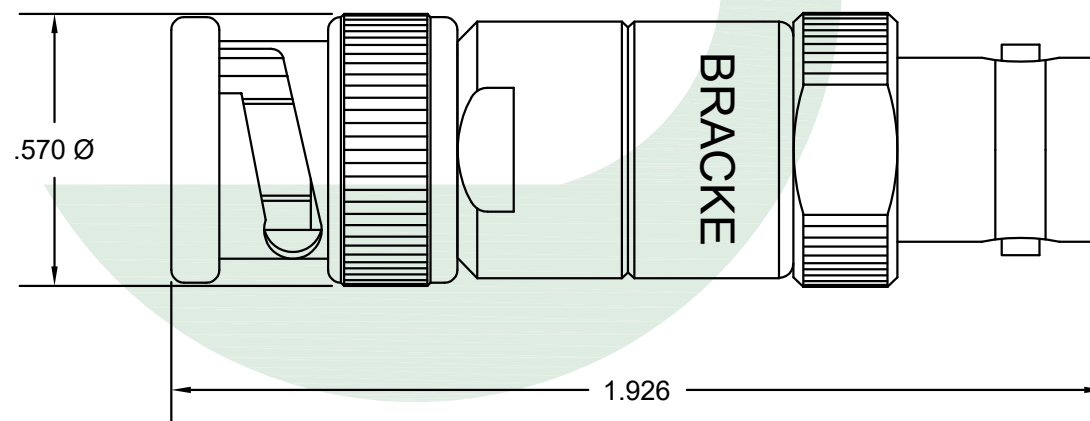

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE	
BM13501			6LOW2	
			Scale	Unit
			2.5:1	Inches
Produced By	Checked By	Notes	Date	Revision
002	013	• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2014 Bracke Manufacturing, LLC	05/12/2014	A-01

©2014 Bracke Manufacturing, LLC