


CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELDS SILVER PLATED COPPER	IMPEDANCE	50 OHMS
HOUSING	PLASTIC	JACKET	.114" Ø FLUORINATED ETHYLENE PROPYLENE	NOMINAL CAPACITANCE	29.0 PF/FOOT	HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED	DIELECTRIC	.060" Ø PTFE	MAX OPERATING VOLTAGE	1,200 VOLTS RMS	INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	CENTER CONDUCTOR	.0201" Ø (7 STRANDS .0067" Ø) SILVER CLAD COVERED STEEL	OPERATING TEMPERATURE	-55°C TO +200°C	CONTACT	GOLD PLATED
INSULATOR	PTFE					INSULATOR	PTFE
 FAKRA CONNECTOR CODE H BM61762		 DIELECTRIC SHIELDS JACKET RG316-Double BRACKE CENTER CONDUCTOR				 BM61762 FAKRA CONNECTOR CODE H	

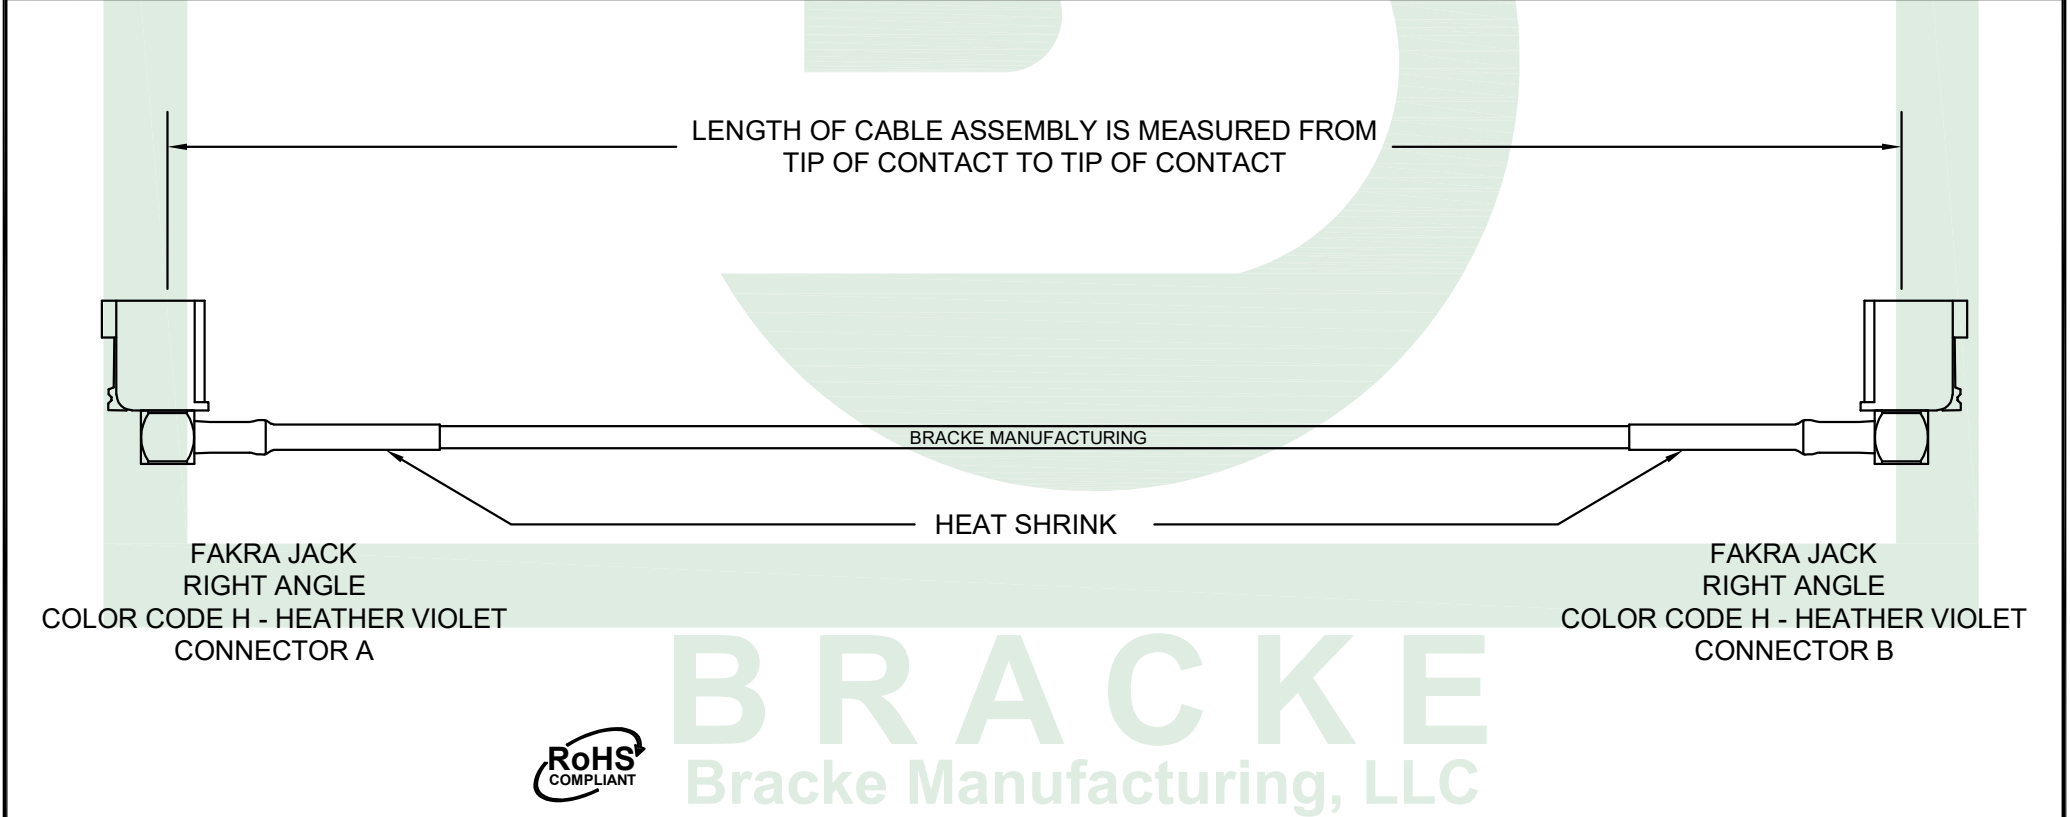

BRACKE
Bracke Manufacturing, LLC

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM92879.**				6LOW2	
	Produced By	Checked By	Notes • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. • Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater • Replace ** with ANY length in Inches ©2024 Bracke Manufacturing, LLC		Scale	Unit
	002	014			1:1	Inches
					Date	Revision
		08/26/2024	A-01			