


M A T E R I A L S	WAVEGUIDE BODY	ALUMINUM
	CONNECTOR	PASSIVATED STAINLESS STEEL
	CONTACT	GOLD PLATED
	INSULATOR	PTFE
	O - RING	RUBBER
E L E C T R I C A L S	IMPEDANCE (OHM)	50
	WAVEGUIDE	CPR - 112G
	FREQUENCY RANGE (GHz)	7.05 - 10
	VSWR (MAX)	1.30:1



BRACKE
Bracke Manufacturing, LLC

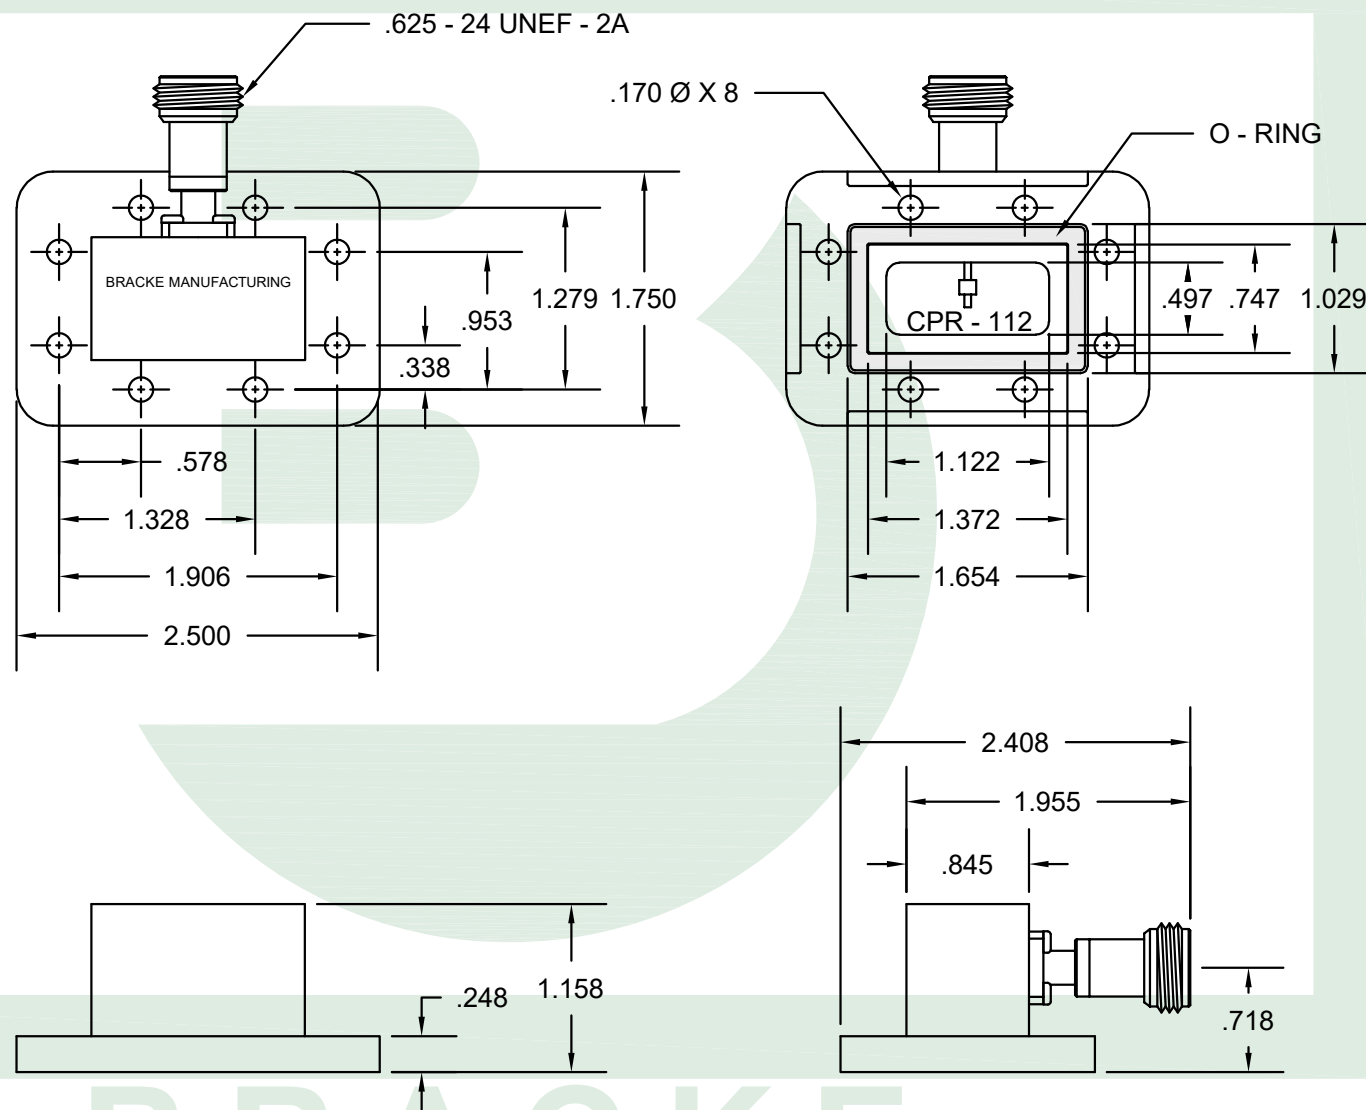

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949) 756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description		CAGE / NAGE	
BM75027		N Female to CPR-112G		6LOW2	
Frequency Range 7.05 - 10 GHz [Waveguide with O-Ring]				Scale	Unit
Produced By	Checked By	Notes		3/4:1	Inches
002	013	- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. - The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.		Date	Revision
		©2022 Bracke Manufacturing, LLC		11/18/2022	A-01