
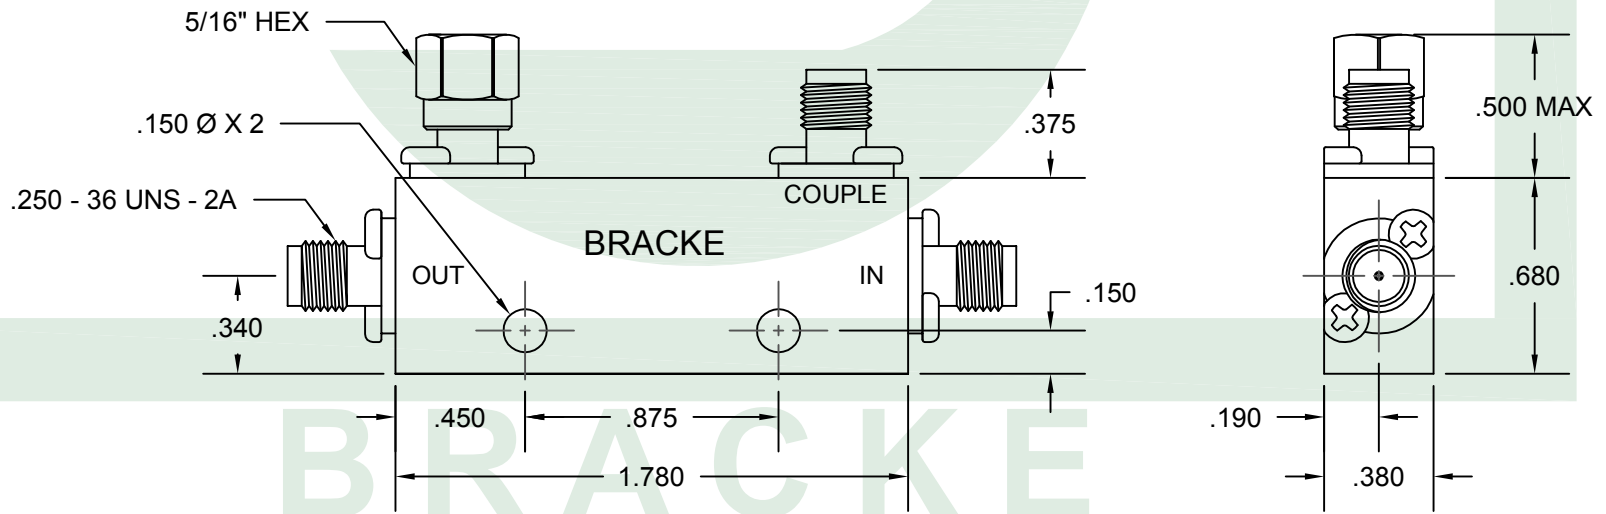


ELECTRICALS

FREQUENCY RANGE (GHz)		2 - 8
COUPLING (w/ FREQUENCY SENSITIVITY dB MAX)		10 +/- 1.00
FREQUENCY SENSITIVITY (dB MAX)		+/- .30
DIRECTIVITY (dB MIN)		20
PEAK POWER (WATTS)		3K
IMPEDANCE (OHM)		50
VSWR (MAX)	PRIMARY	1.25:1
	SECONDARY	1.25:1
INSERTION LOSS (dB MAX)	TRUE	1.00
	EXCLUDING COUPLED POWER	.35
AVERAGE POWER (WATTS MAX)	INCIDENT	50
	REFLECTED	5

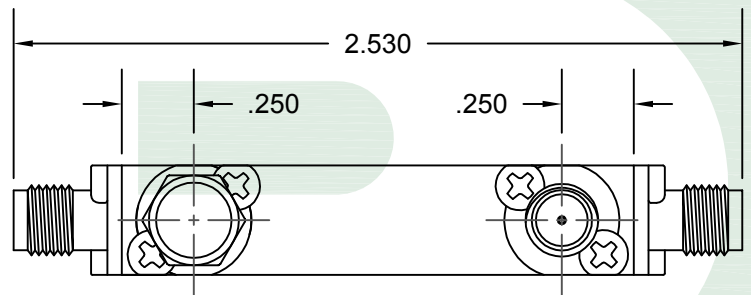

BRACKE

Bracke Manufacturing, LLC



**Bracke Manufacturing, LLC**  
 PO Box 12319  
 Newport Beach, Ca 92658  
 Phone (949)756-1600 / Fax (949) 756-1601  
 sales@brackemfg.com / www.brackemfg.com

Part Number	
<b>BM80430</b>	
Produced By	Checked By
002	013

Description	
<b>SMA Female, Frequency Range 2-8 GHz</b> [Broadband Directional Couplers]	
Notes	
<ul style="list-style-type: none"> <li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li> <li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li> </ul>	
©2015 Bracke Manufacturing, LLC	

CAGE / NAGE	
6LOW2	
Scale	Unit
1:1	Inches
Date	Revision
10/14/2015	A-01