

MATERIALS	
BODY	BRASS NICKEL PLATED
FERRULE	GOLD PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE

HARDWARE

FERRULE

CONTACT




NUT


WASHER

BRACKE  
MANUFACTURING

HEAT-SHRINK

ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	12.4 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.50:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

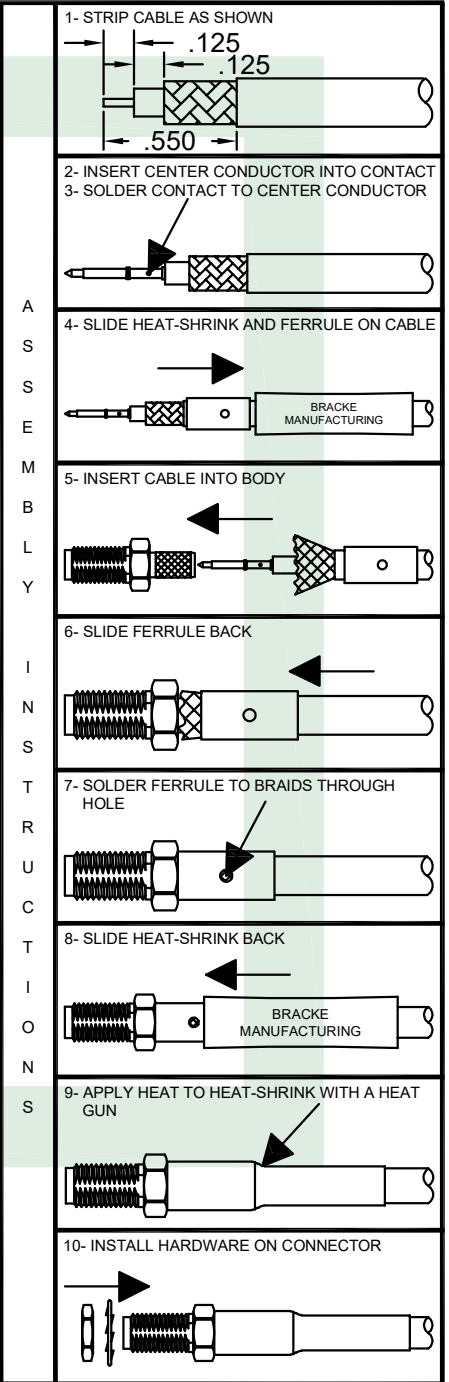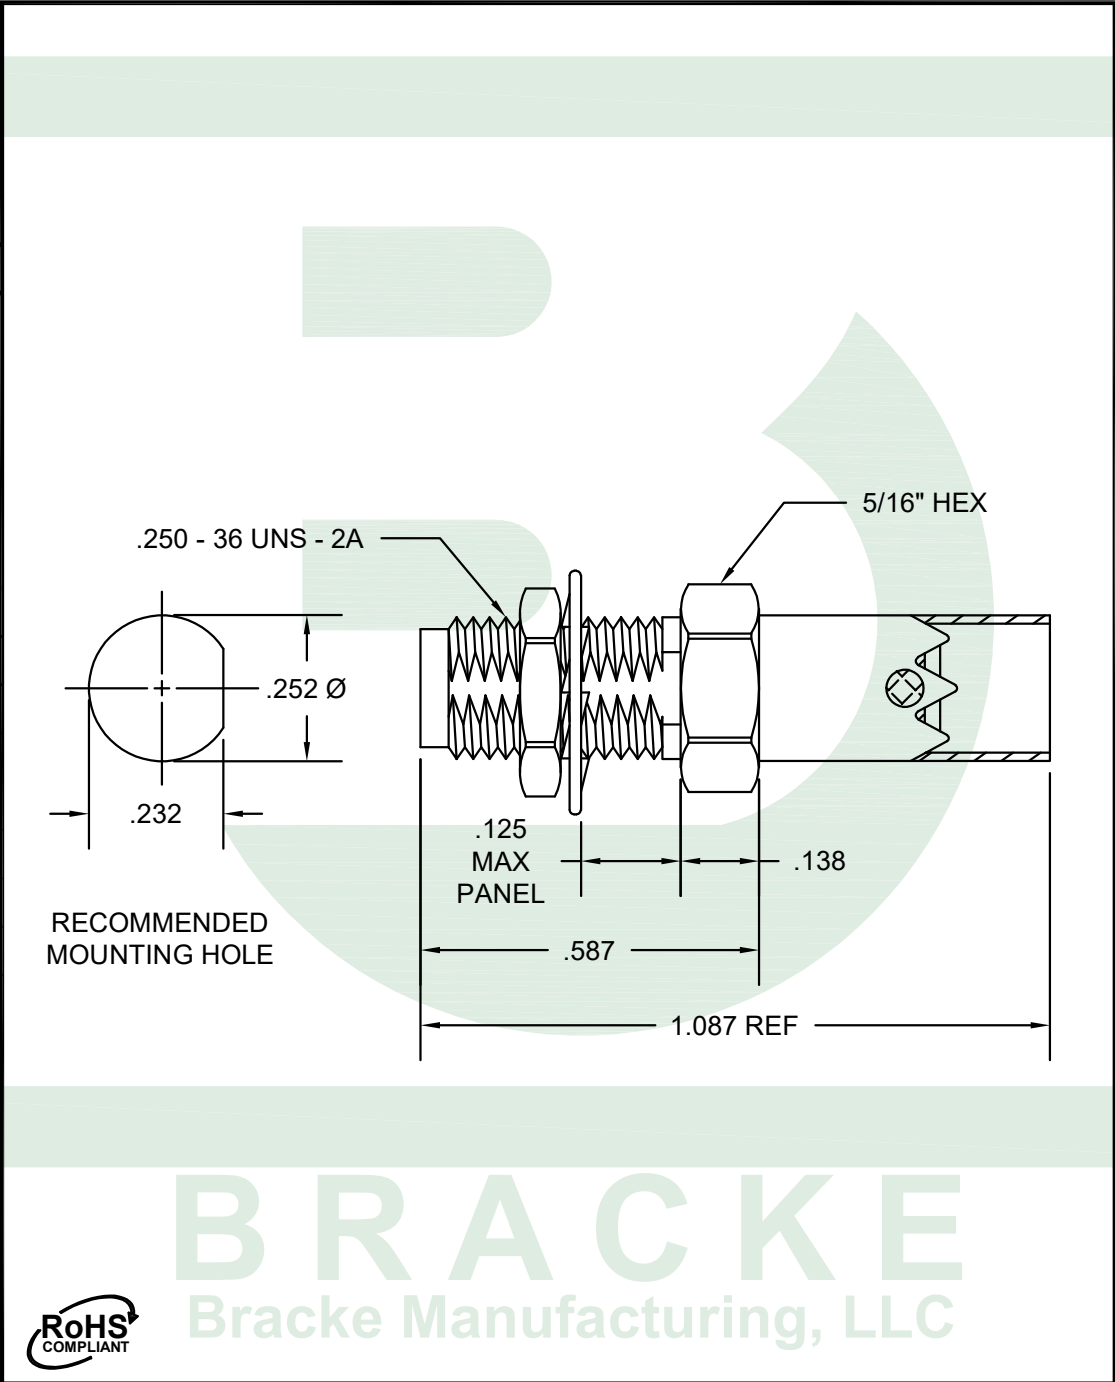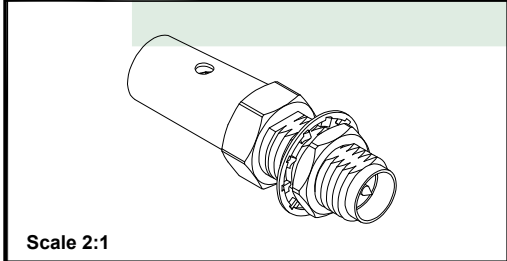

 <div><b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	<b>Part Number</b>		<b>Description</b>		<b>CAGE / NAGE</b>	
	<b>BM60675</b>		<b>Reverse Polarity SMA Female Bulkhead</b> Solder Connector [RG55, RG58, RG141, RG142, RG223, RG400]		6LOW2	
					<b>Scale</b>	<b>Unit</b>
	<b>Produced By</b>	<b>Checked By</b>	<b>Notes</b> <div><div>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</div><div>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</div></div> <div>©2023 Bracke Manufacturing, LLC</div>		<b>Date</b>	<b>Revision</b>
	002	007			9/18/2023	A-01