
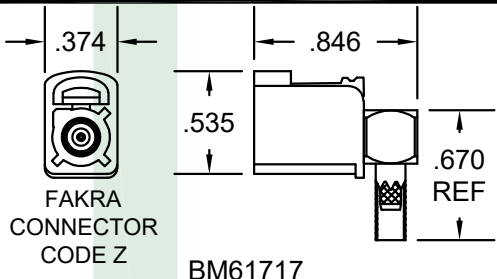
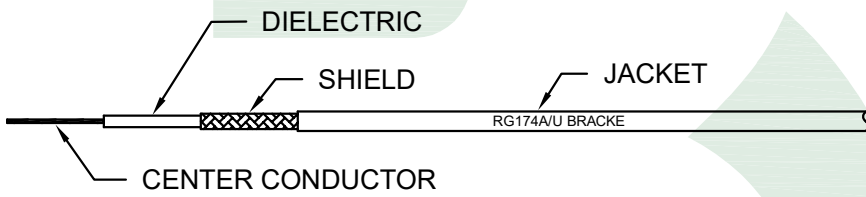
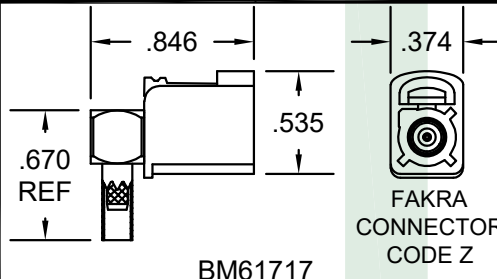



CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	1 SHIELD TINNED COPPER	IMPEDANCE	50 OHMS
HOUSING	PLASTIC	JACKET	.100" Ø BLACK POLYVINYL CHLORIDE NON-CONTAMINATING	NOMINAL CAPACITANCE	30.8 PF/FOOT	HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED	DIELECTRIC	.060" Ø PE	MAX OPERATING VOLTAGE	1,500 VOLTS RMS	INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	CENTER CONDUCTOR	.0189" Ø (7 STRANDS .0063" Ø) COPPER CLAD STEEL	OPERATING TEMPERATURE	-40°C TO +80°C	CONTACT	GOLD PLATED
INSULATOR	PTFE					INSULATOR	PTFE
 <p>FAKRA CONNECTOR CODE Z</p> <p>BM61717</p>		 <p>DIELECTRIC</p> <p>SHIELD</p> <p>JACKET</p> <p>RG174U/A BRACKE</p> <p>CENTER CONDUCTOR</p>				 <p>BM61717</p> <p>FAKRA CONNECTOR CODE Z</p>	

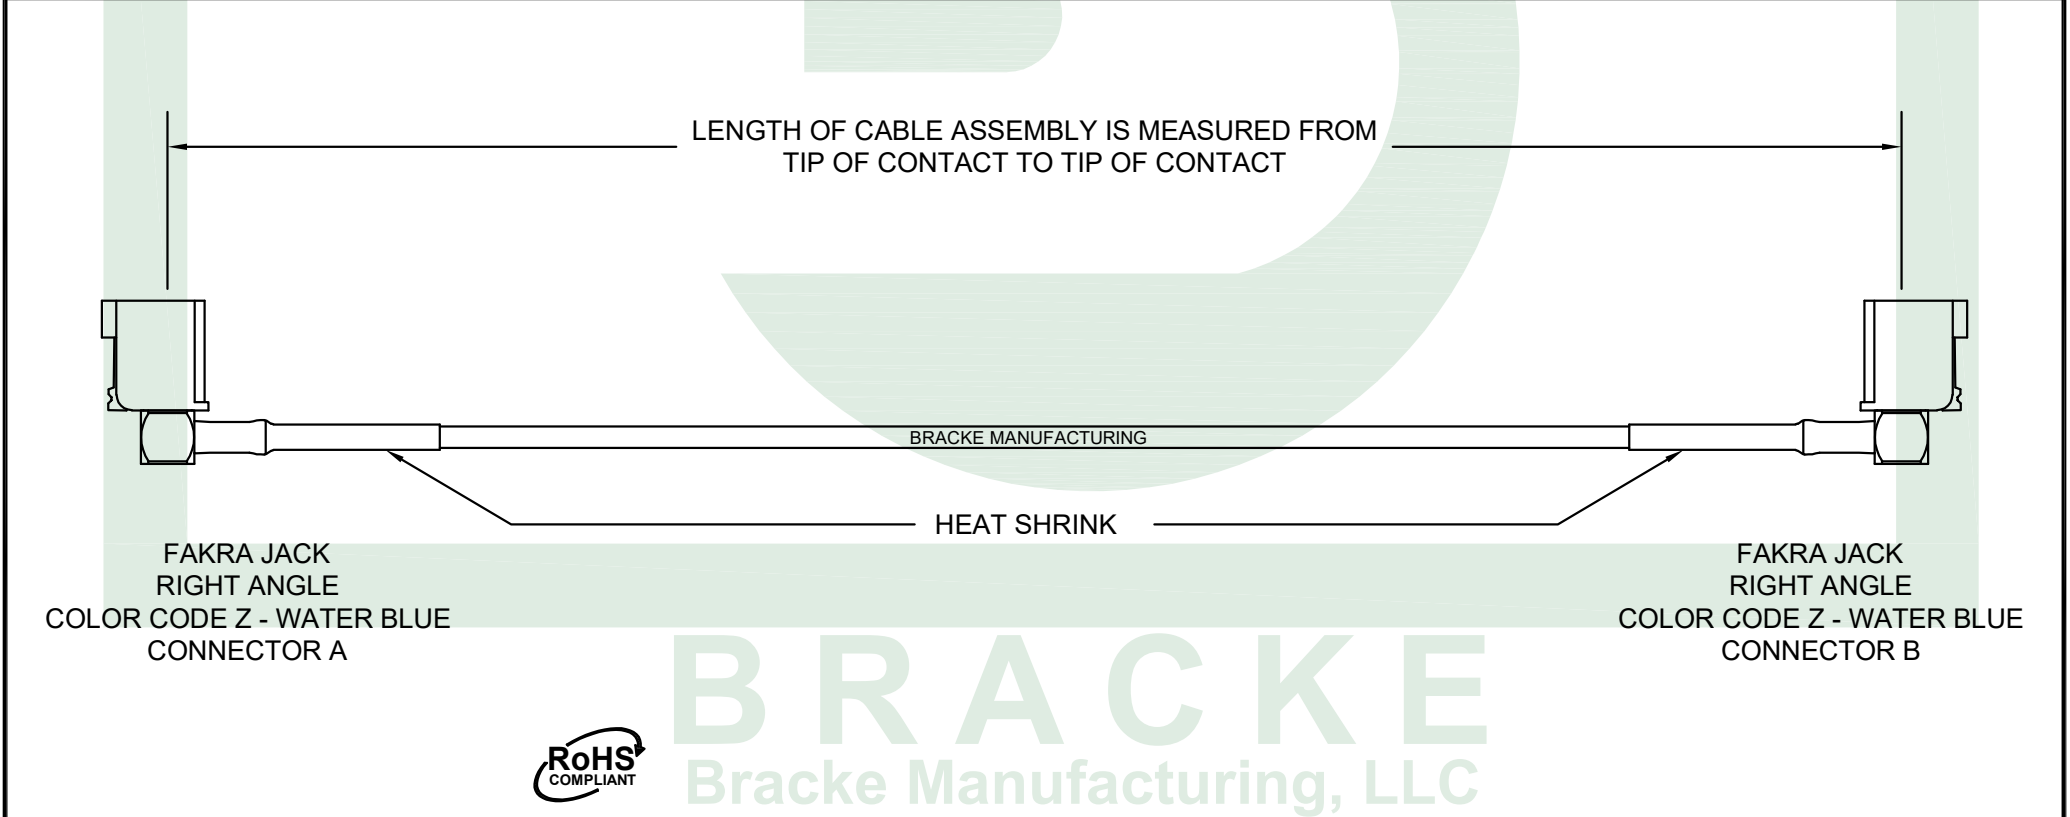

BRACKE
Bracke Manufacturing, LLC

 <div>Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	Part Number		Description		CAGE / NAGE	
	BM92853.**				6LOW2	
	Produced By	Checked By	Notes		Scale	Unit
	002	014			1:1	Inches
					Date	Revision
			08/26/2024	A-01		
		©2024 Bracke Manufacturing, LLC				