


CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	1 SHIELD TINNED COPPER	IMPEDANCE	50 OHMS
HOUSING	PLASTIC	JACKET	.100" Ø BLACK POLYVINYL CHLORIDE NON-CONTAMINATING	NOMINAL CAPACITANCE	30.8 PF/FOOT	HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED	DIELECTRIC	.060" Ø PE	MAX OPERATING VOLTAGE	1,500 VOLTS RMS	INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	CENTER CONDUCTOR	.0189" Ø (7 STRANDS .0063" Ø) COPPER CLAD STEEL	OPERATING TEMPERATURE	-40°C TO +80°C	CONTACT	GOLD PLATED
INSULATOR	PTFE					INSULATOR	PTFE
 FAKRA CONNECTOR CODE B BM61711		 DIELECTRIC SHIELD JACKET CENTER CONDUCTOR RG174A/U BRACKE				 FAKRA CONNECTOR CODE B BM61711	

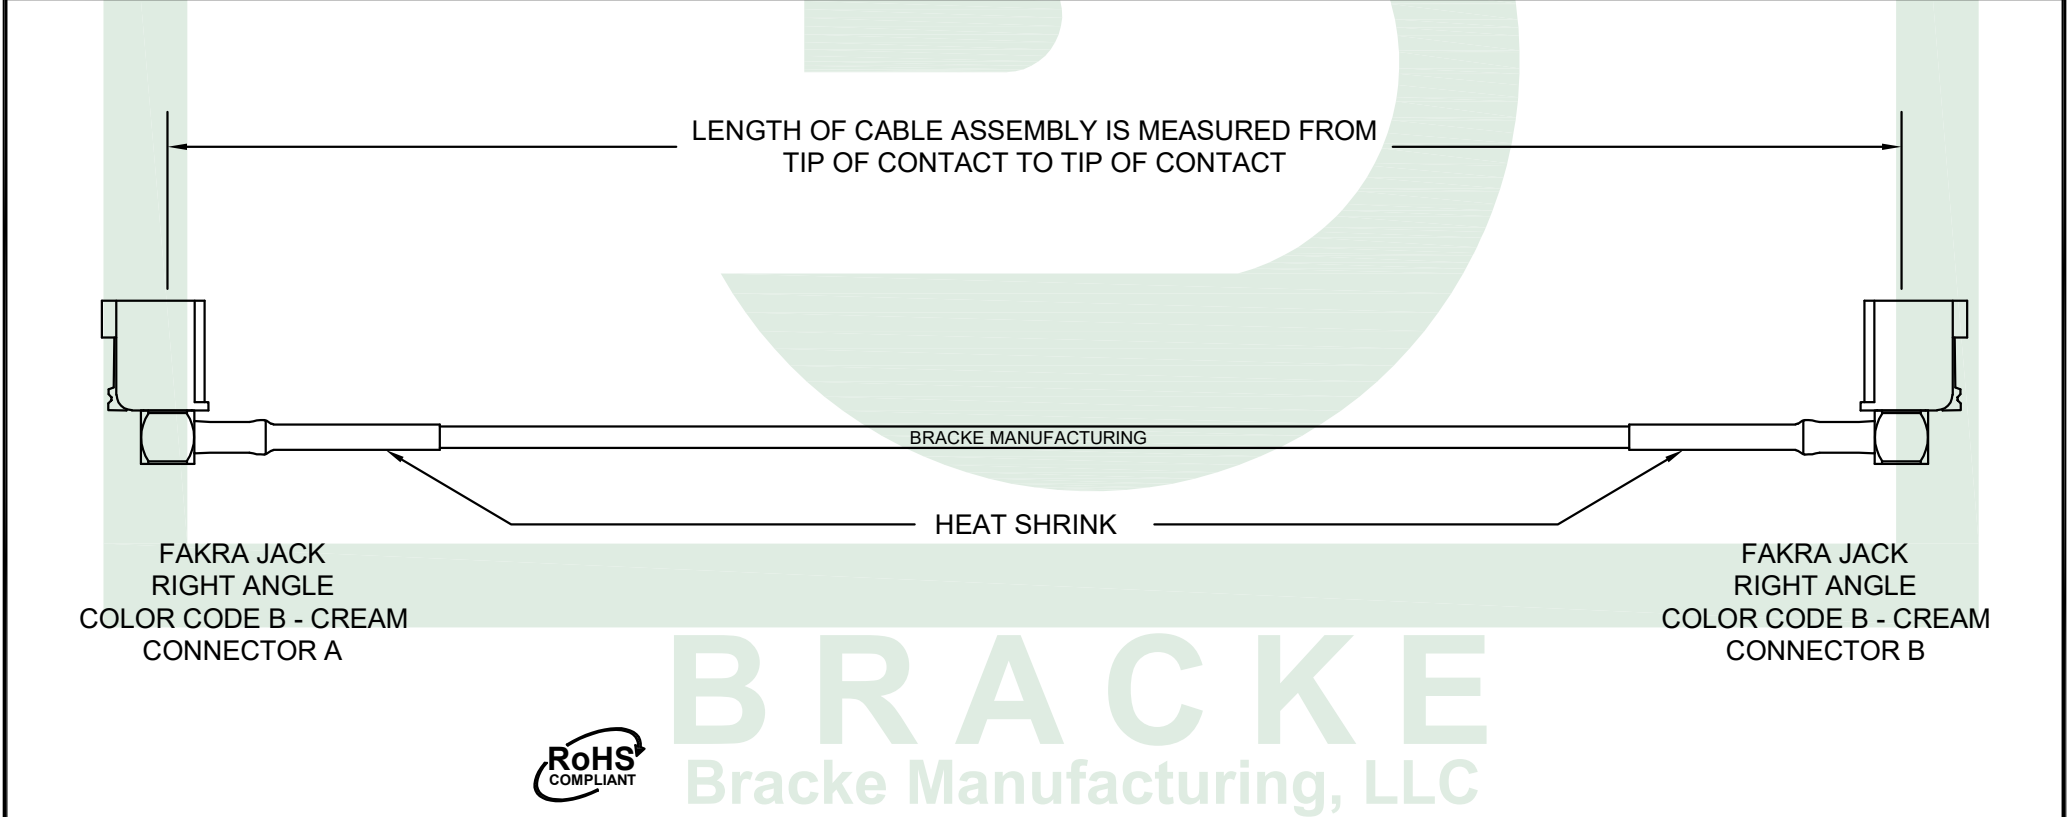

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949) 756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE		
BM92841.**		Fakra Jack Right Angle to Fakra Jack Right Angle Color Code B - Cream, RG174A/U, Cable Assemblies	6LOW2		
Produced By	Checked By	Notes <ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.• Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater• Replace ** with ANY length in Inches	Scale	Unit	
002	014		1:1	Inches	
			Date	Revision	
			08/26/2024	A-01	

©2024 Bracke Manufacturing, LLC



BRACKE
Bracke Manufacturing, LLC