



MATERIALS	SMA CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
ELECTRICALS	FREQUENCY RANGE (GHz)	18 - 26.5
	VSWR (MAX)	1.40:1
	INSERTION LOSS (dB MAX)	0.80
	ISOLATION (dB MIN)	18
	AVERAGE POWER (WATTS)	10
	PEAK POWER (WATTS)	30
	OPERATING TEMP (°C)	-20 to +65

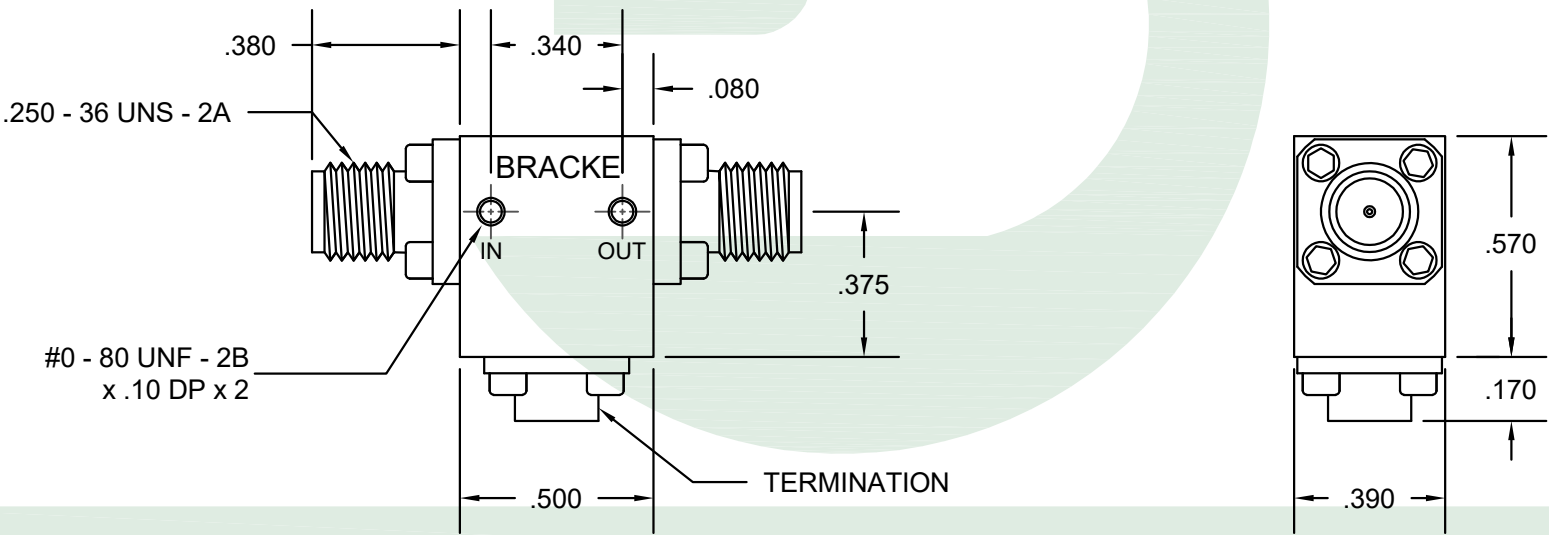

BRACKE
Bracke Manufacturing, LLC

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description	CAGE / NAGE			
	BM13312			6LOW2			
			SMA Female, 10 Watts 50 Ohm [Isolator, Max VSWR 1.40:1 @ 26.5 GHz]	Scale	Units		
				2:1	Inches		
	Produced By	Checked By		Notes		Date	Revision
	002	013		<ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2020 Bracke Manufacturing, LLC</div>		10/16/2015	A-01