
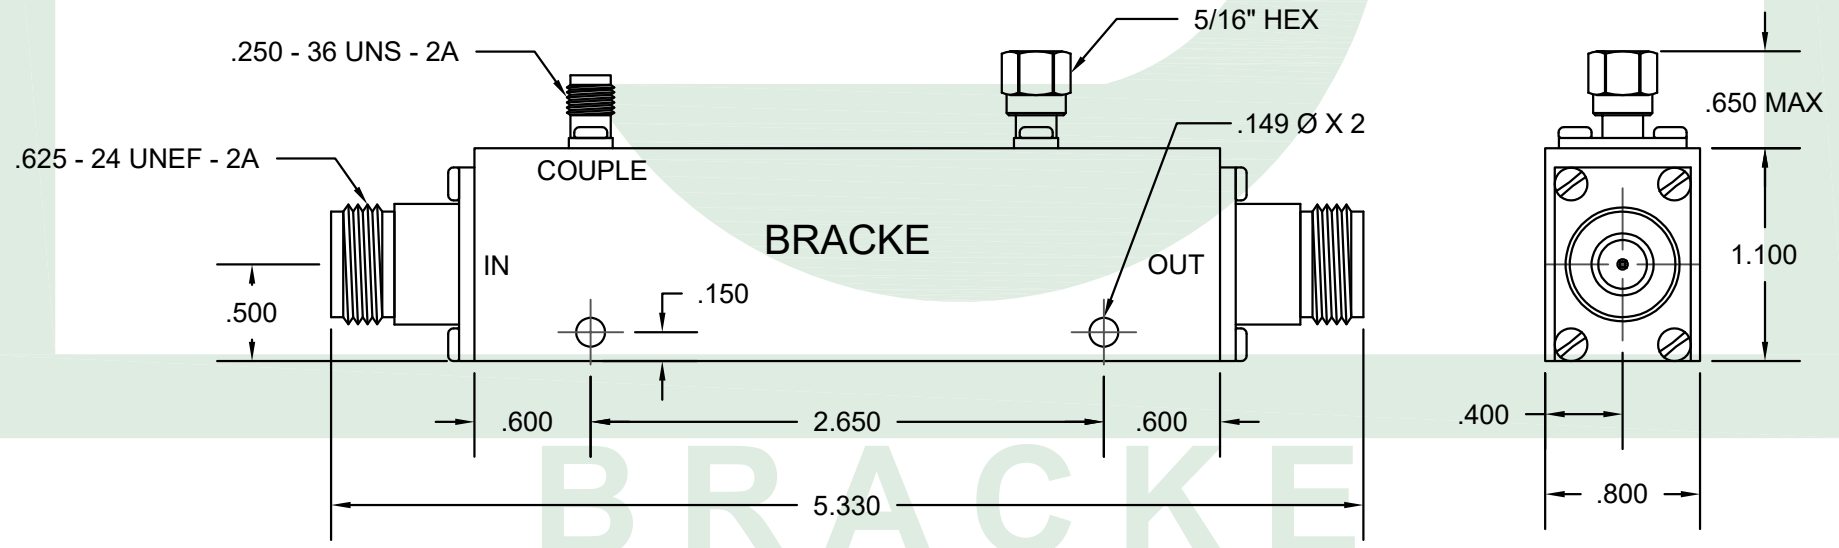


E P L R O C P T E R I T C I A E L S

FREQUENCY RANGE (GHz)	1 - 4
COUPLING (w/ FREQUENCY SENSITIVITY dB MAX)	30 ± 1.00
VSWR (MAX)	1.20.1
INSERTION LOSS (dB MAX)	0.2
FREQUENCY SENSITIVITY (dB MAX)	± .75
DIRECTIVITY (dB MIN)	16
AVERAGE POWER (WATTS)	600
PEAK POWER (WATTS)	10K
IMPEDANCE (OHM)	50

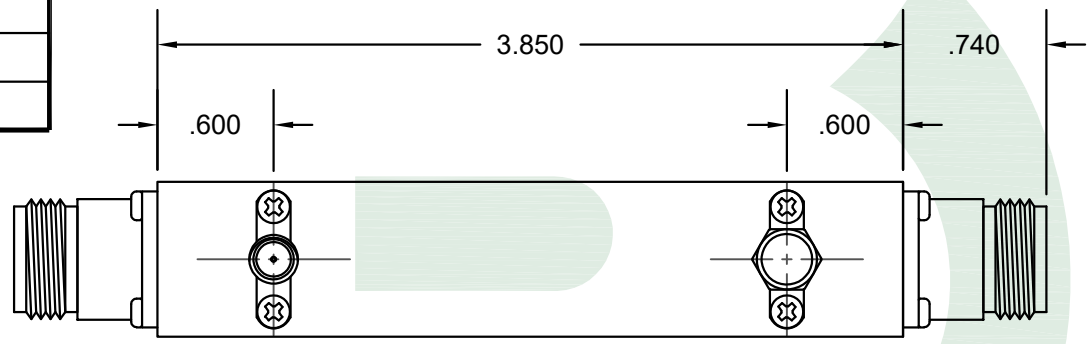

BRACKE

Bracke Manufacturing, LLC



Bracke Manufacturing, LLC
 PO Box 12319
 Newport Beach, Ca 92658
 Phone (949)756-1600 / Fax (949) 756-1601
 sales@brackemfg.com / www.brackemfg.com

Part Number	
BM80482	
Produced By	Checked By
012	013

Description	
N Female High Power	
Frequency Range 1 - 4 GHz [Directional Couplers]	
Notes	
<ul style="list-style-type: none"> • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 	
©2015 Bracke Manufacturing, LLC	

CAGE / NAGE	
6LOW2	
Scale	Unit
1:1	Inches
Date	Revision
10/14/2015	A-01