



M A T E R I A L S	BNC CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATORS	PTFE
E P L O C T R I C A L S	IMPEDANCE (OHM)	50
	FREQUENCY RANGE (GHz)	.05 - 3
	VSWR (MAX)	1.35:1
	INPUT POWER (WATTS MAX)	2
	DC CURRENT (AMPS MAX)	2
	VOLTAGE RATING (VOLTS MAX)	100
	ATTENUATION (dB)	10
	ACCURACY (dB)	+/- 2.00
	OPERATING TEMP. RANGE (°C)	-55 to +85

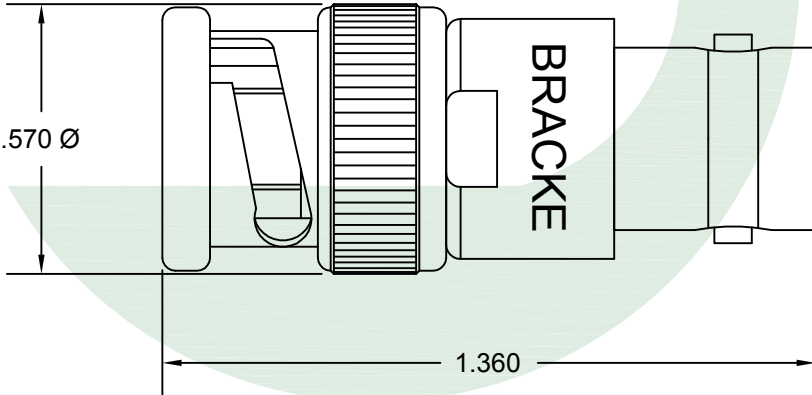

BRACKE  
Bracke Manufacturing, LLC

	<b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description	CAGE / NAGE		
		<b>BM10064.10</b>			6LOW2		
		Produced By	Checked By	Notes		Scale	Unit
		002	013			2:1	Inches
				<ul style="list-style-type: none"><li>Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li></ul> ©2014 Bracke Manufacturing, LLC		Date	Revision
		05/21/2014	A-01				