



MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	SILVER PLATED
INSULATOR	PTFE

HARDWARE




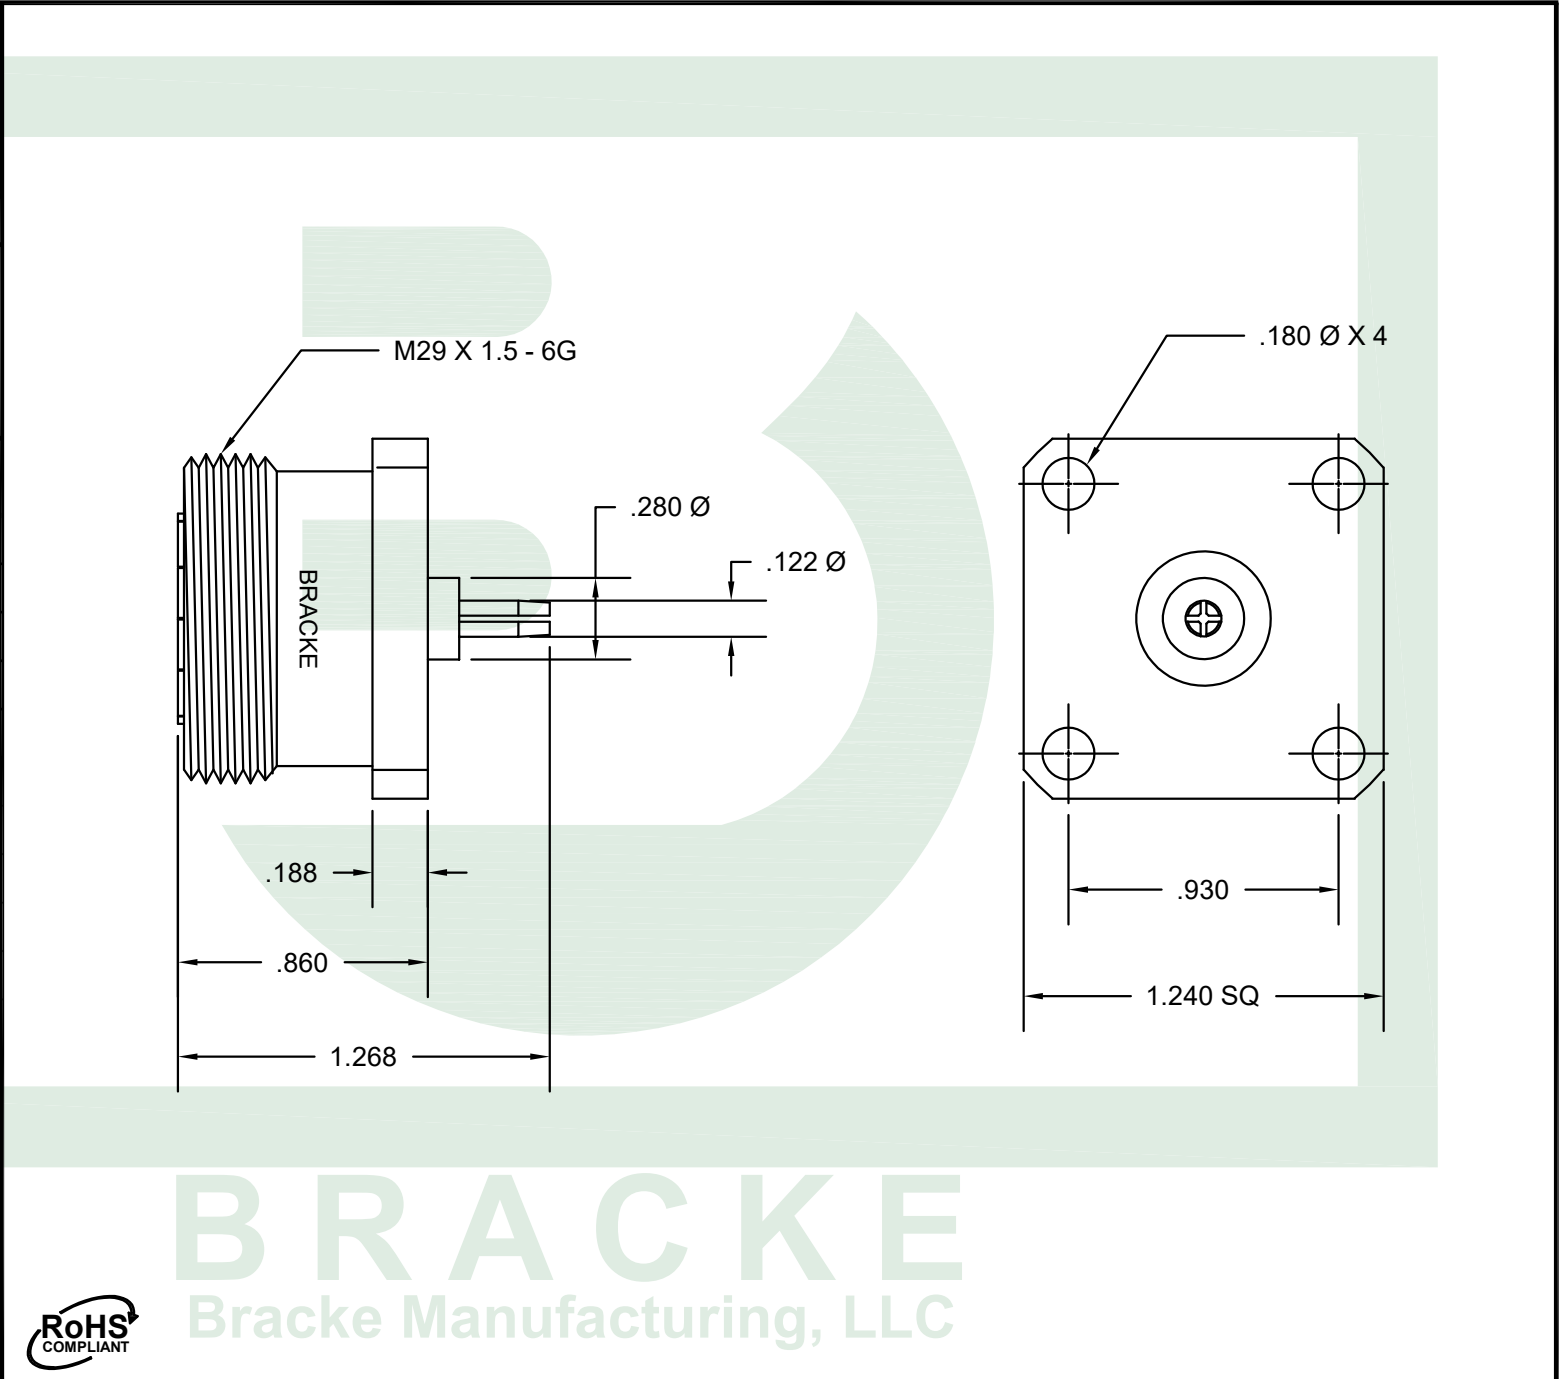
BOLT X 4


ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHM
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	7.5 GHz
DIELECTRIC WITHSTANDING VOLTAGE	4000 Vrms
VSWR TYPICAL	1.20:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	2700 VOLTS
INTERFACE	IEC 169-4
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B



Scale 3/4:1





 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM61255		7/16 Din Female Quick Change Panel Mount Slotted Contact Terminal for Watt Meter [Connector]		6LOW2	
					Scale	Unit
	Produced By		Checked By		Notes	
	002		007		<ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2023 Bracke Manufacturing, LLC</div>	
				Date	Revision	
				10/16/2023	A-01	