


CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELD TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHMS
BODY	BRASS GOLD PLATED	JACKET	.240" Ø THERMOPLASTIC ELASTOMER	NOMINAL CAPACITANCE	24.2 PF/FOOT	BODY	BRASS GOLD PLATED
CONTACT	GOLD PLATED	DIELECTRIC	.150" Ø FPE	MAX OPERATING VOLTAGE	5,000 VOLTS RMS	CONTACT	GOLD PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.056" Ø BARE COPPER	OPERATING TEMPERATURE	-40°C TO +85°C	INSULATOR	PTFE

5/16" HEX
BRASSE
.968 REF
BM61410


BRAZE
JACKET .240 Ø
BRAIDS .178 Ø
OUTER CONDUCTOR .155 Ø
DIELECTRIC .150 Ø
STRANDED CENTER CONDUCTOR .056 Ø

5/16" HEX
.250 - 36 UNS - 2A
.150 MAX PANEL
.232 RECOMMENDED MOUNTING HOLE
1.078 REF
BM61401

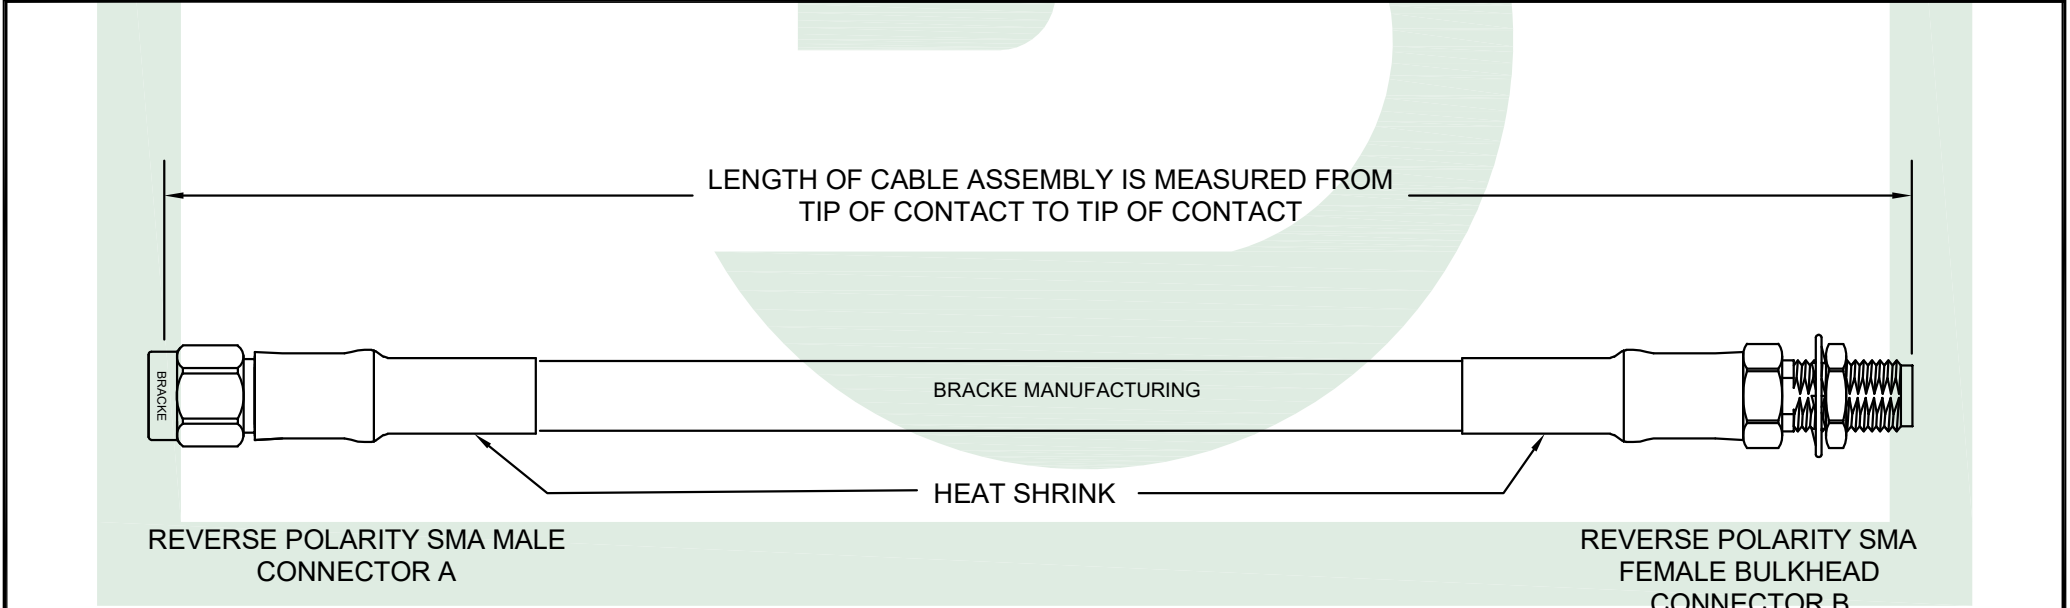

BRACKE
Bracke Manufacturing, LLC

LMR® is a registered trademark of Times Microwave Systems

 <div>Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	Part Number		Description		CAGE / NAGE	
	BM92006.**		Reverse Polarity SMA Male to Reverse Polarity SMA Female Bulkhead, Cable Assembly using LMR[®]-240-Ultra-Flex Cable		6LOW2	
	Produced By	Checked By	Notes <ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.• Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater• Replace ** with ANY length in Inches		Scale	Unit
	004	013			1.5:1	Inches
			©2025 Bracke Manufacturing, LLC		Date	Revision
					06/20/2025	A-01