

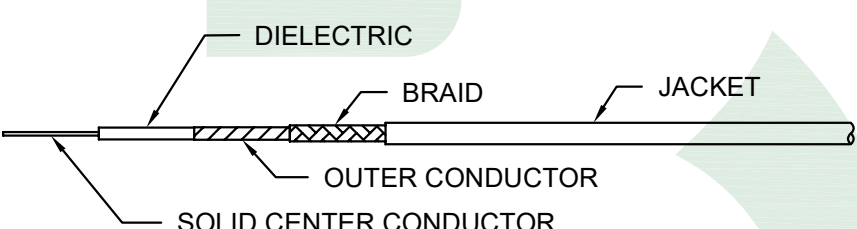
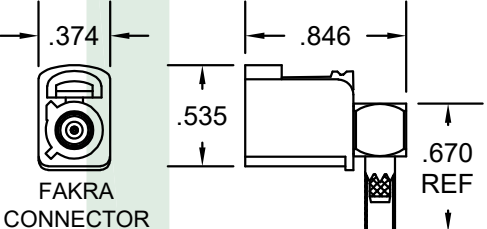


CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELD TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHMS
HOUSING	PLASTIC	JACKET	.110" Ø POLYVINYL CHLORIDE	NOMINAL CAPACITANCE	30.8 PF/FOOT	HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED	DIELECTRIC	.060" Ø PE	MAX OPERATING VOLTAGE	2,000 VOLTS RMS	INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	CENTER CONDUCTOR	.018 Ø BARE COPPER COVERED STEEL	OPERATING TEMPERATURE	-40°C TO +85°C	CONTACT	GOLD PLATED
INSULATOR	PTFE					INSULATOR	PTFE
 FAKRA CONNECTOR CODE H BM61714						 FAKRA CONNECTOR CODE H BM61714	

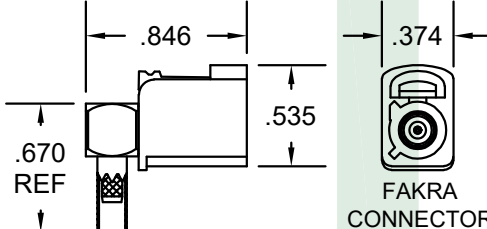

BRACKE
Bracke Manufacturing, LLC

LMR® is a registered trademark of Times Microwave Systems

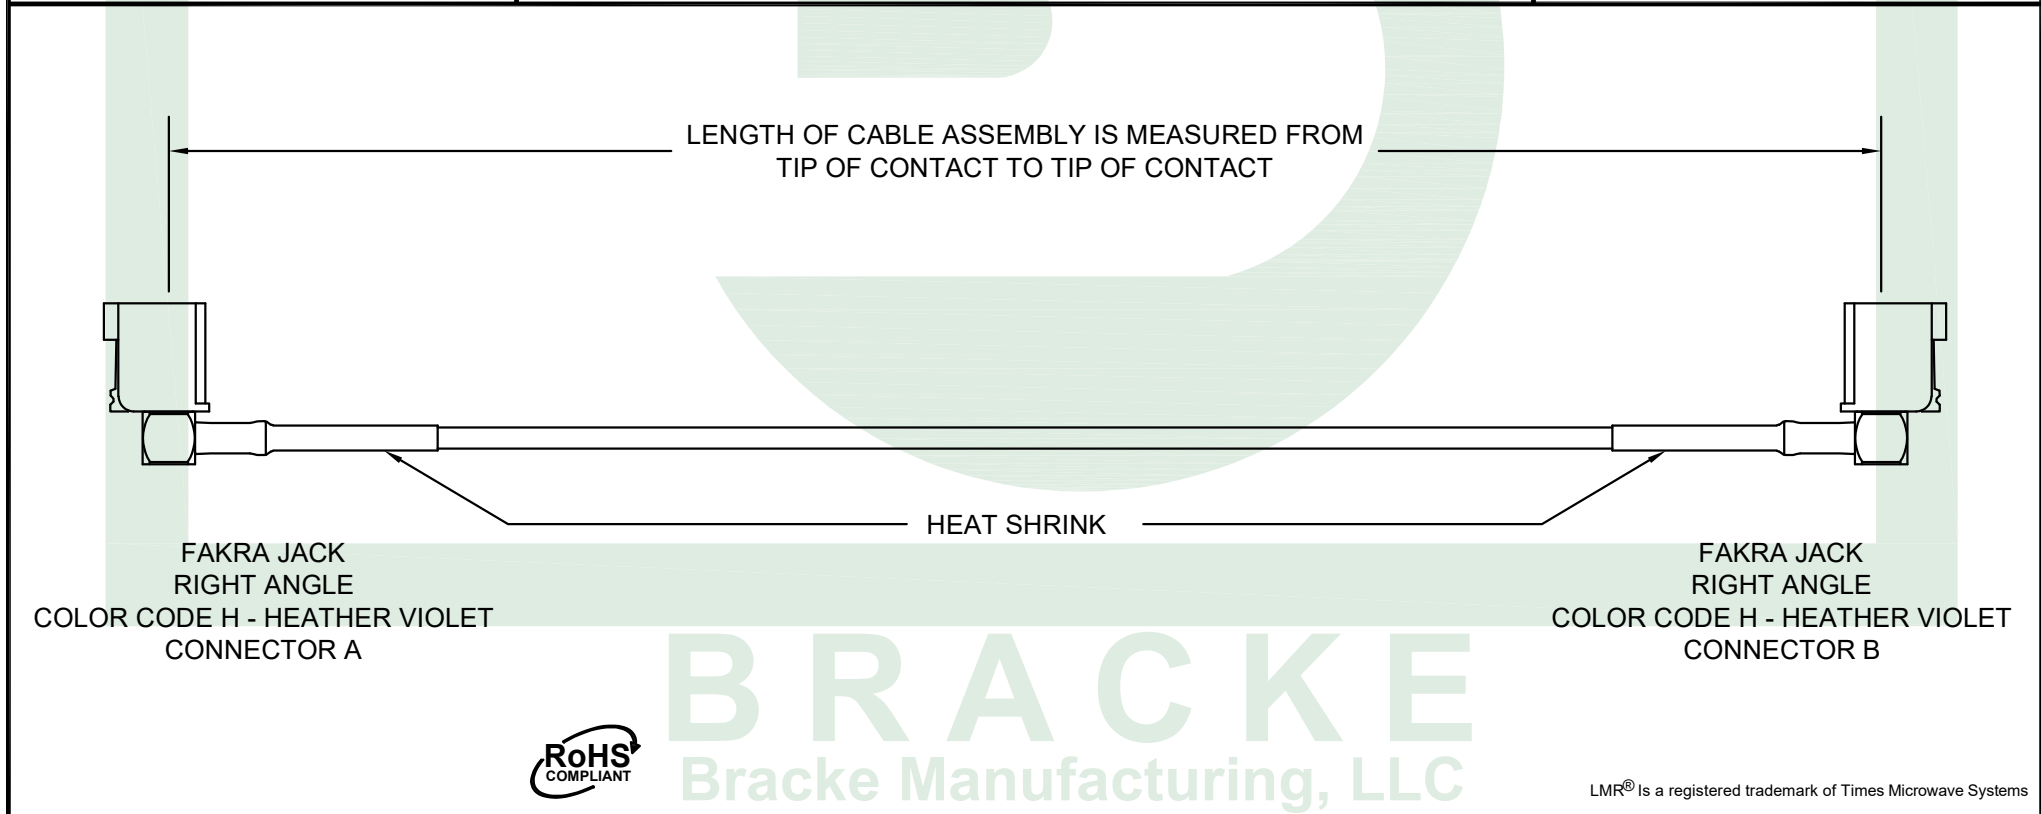

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE	
BM92831.**			6LOW2	
		Fakra Jack Right Angle to Fakra Jack Right Angle Color Code H - Heather Violet, Cable Assembly using LMR®-100A Cable	Scale	Unit
Produced By	Checked By	Notes • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. • Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater • Replace "A" with ANY length in inches ©2025 Bracke Manufacturing, LLC	1:1	Inches
002	014		Date	Revision
			09/23/2025	A-01

©2025 Bracke Manufacturing, LLC