



M A T E R I A L S	SMA CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L E O C P T E R R I T I C I A E L S	FREQUENCY RANGE (GHz)	8 - 18
	VSWR (MAX)	1.45:1
	INSERTION LOSS (dB MAX)	0.80
	ISOLATION (dB MIN)	16
	AVERAGE POWER (WATTS)	10
	PEAK POWER (WATTS)	30
	OPERATING TEMP (°C)	-10 to +85

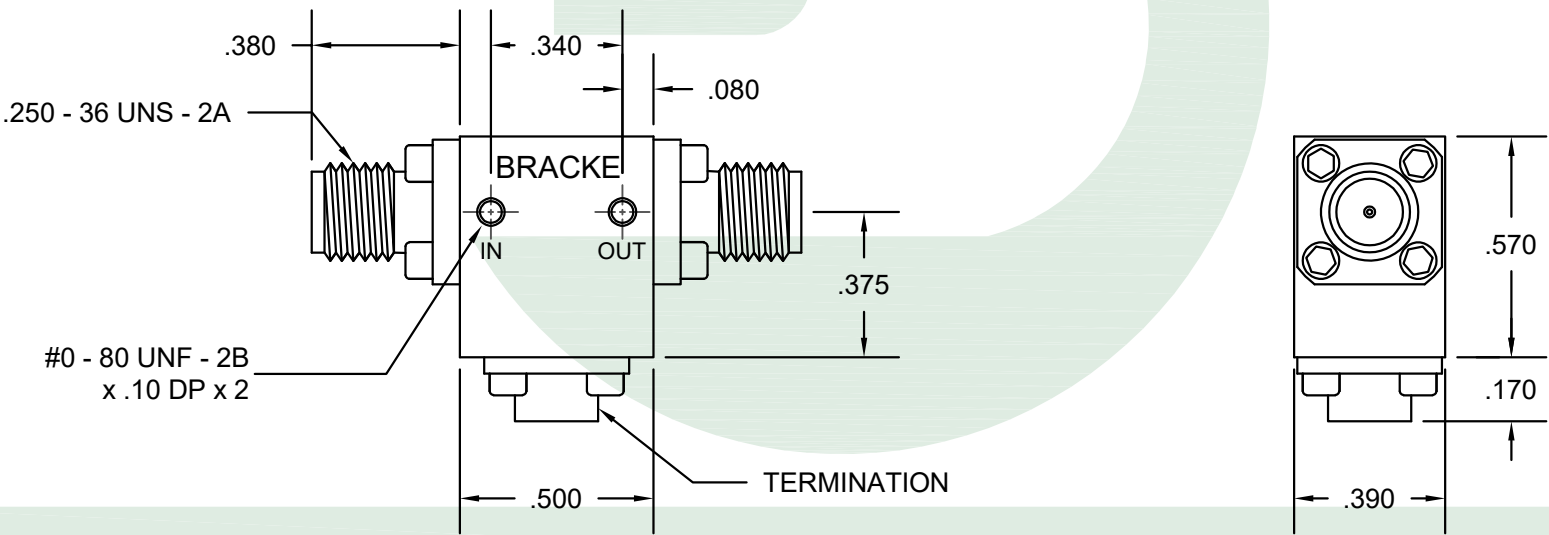

BRACKE

Bracke Manufacturing, LLC

 BRACKE	Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE			
		BM13308		SMA Female, 5 Watts 50 Ohm [Isolator, Max VSWR 1.45:1 @ 18 GHz]		6LOW2			
						Scale	Units		
		Produced By		Checked By		Notes		Date	Revision
		002		013		<ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2020 Bracke Manufacturing, LLC</div>		10/16/2015	A-01

SMA Female, 5 Watts
 50 Ohm [Isolator, Max VSWR 1.45:1 @ 18 GHz]

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2020 Bracke Manufacturing, LLC