


M A T E R I A L S	SMA CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L E O C P T E R R I T C I A E L S	FREQUENCY RANGE (GHz)	11 - 18
	VSWR (MAX)	1.25:1
	INSERTION LOSS (dB MAX)	0.50
	ISOLATION (dB MIN)	20
	AVERAGE POWER (WATTS)	5
	PEAK POWER (WATTS)	20
	OPERATING TEMP (°C)	-20 to +65



BRACKE
Bracke Manufacturing, LLC

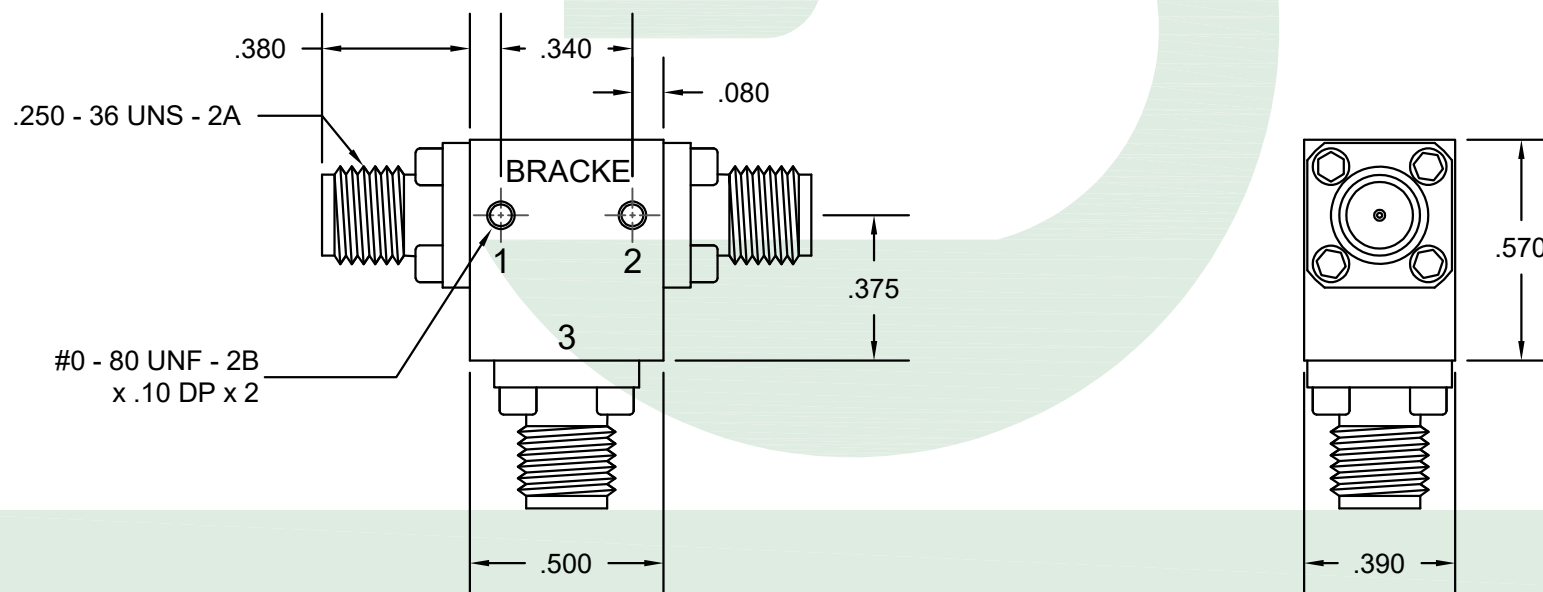

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE		
BM13311			6LOW2		
			Scale	Units	
			1:1	Inches	
Produced By	Checked By	Notes		Date	Revision
002	013	<ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2020 Bracke Manufacturing, LLC</div>		10/16/2015	A-01

©2020 Bracke Manufacturing, LLC