

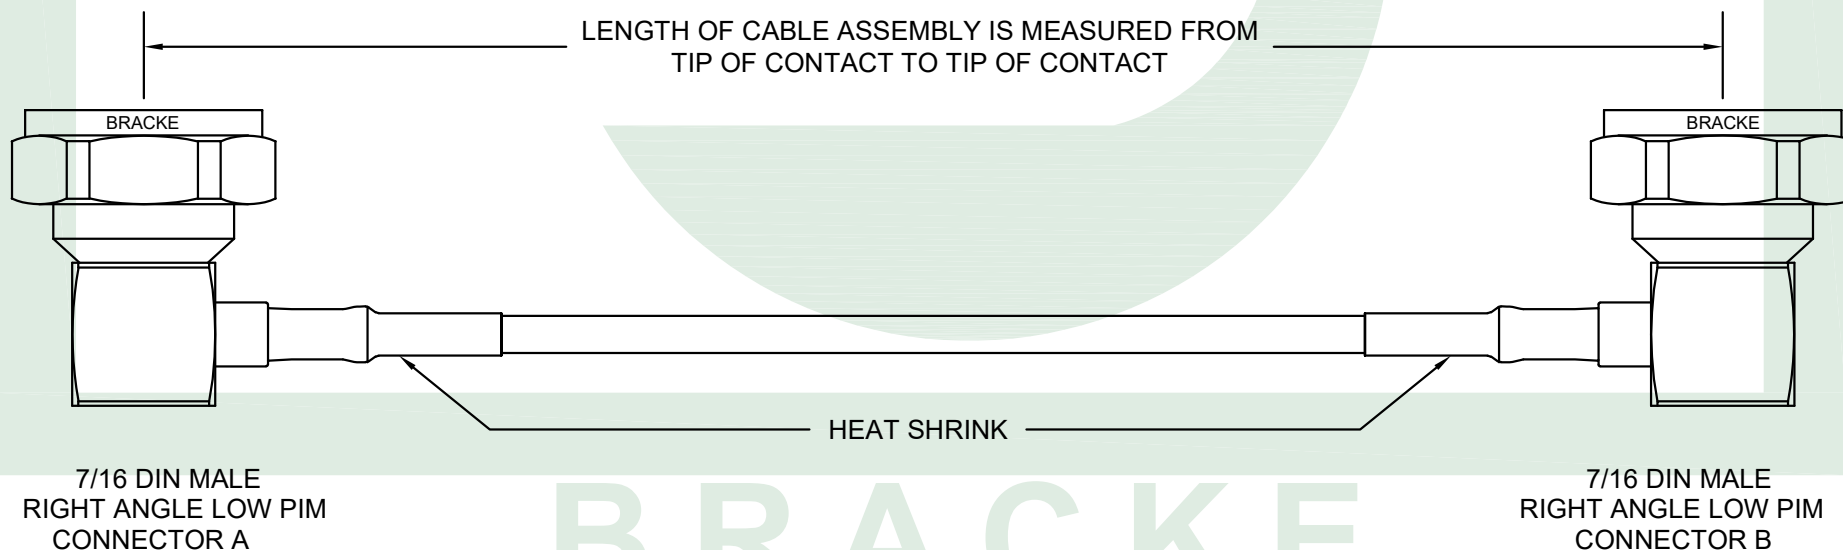
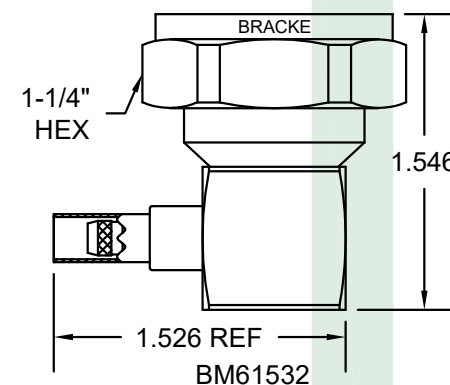


CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHM	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELD TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHM
BODY	BRASS TRI-METAL PLATED	JACKET	.195" Ø TPE	NOMINAL CAPACITANCE	25.4 PF/FOOT	BODY	BRASS TRI-METAL PLATED
CONTACT	SILVER PLATED	DIELECTRIC	.110" Ø FPE	MAX OPERATING VOLTAGE	3,000 VOLTS RMS	CONTACT	SILVER PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.038 Ø BARE COPPER	OPERATING TEMPERATURE	-40°C TO +85°C	INSULATOR	PTFE

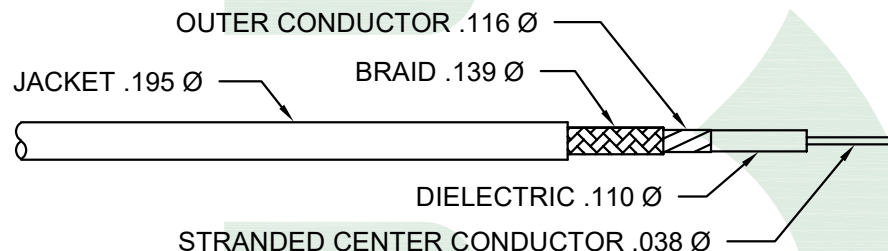

BRACKE
Bracke Manufacturing, LLC

LMR® is a registered trademark of Times Microwave Systems

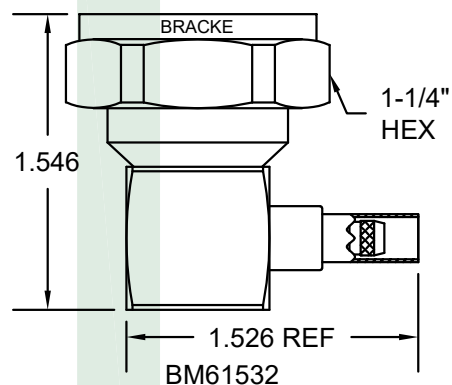

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE	
BM94004.**			6LOW2	
			Scale	Unit
Produced By	Checked By	Notes	1:1	Inches
002	013	• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. • Standard cable length tolerance is $\pm 1.5\%$ or 3/8 inch, whichever is greater • Replace ** with ANY length in Inches	Date	Revision
			10/08/2025	A-01

©2025 Bracke Manufacturing, LLC