



M A T E R I A L S	SMA CONNECTORS	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATORS	PTFE
E P L O P T E R I C A E L S	IMPEDANCE (OHM)	50
	FREQUENCY RANGE (GHz)	.05 - 3
	VSWR (MAX)	1.35:1
	INPUT POWER (WATTS MAX)	2
	DC CURRENT (AMPS MAX)	2
	VOLTAGE RATING (VOLTS MAX)	100
	ATTENUATION (dB)	10
	ACCURACY (dB)	+/- 2.00
	OPERATING TEMP. RANGE (°C)	-55 to +85

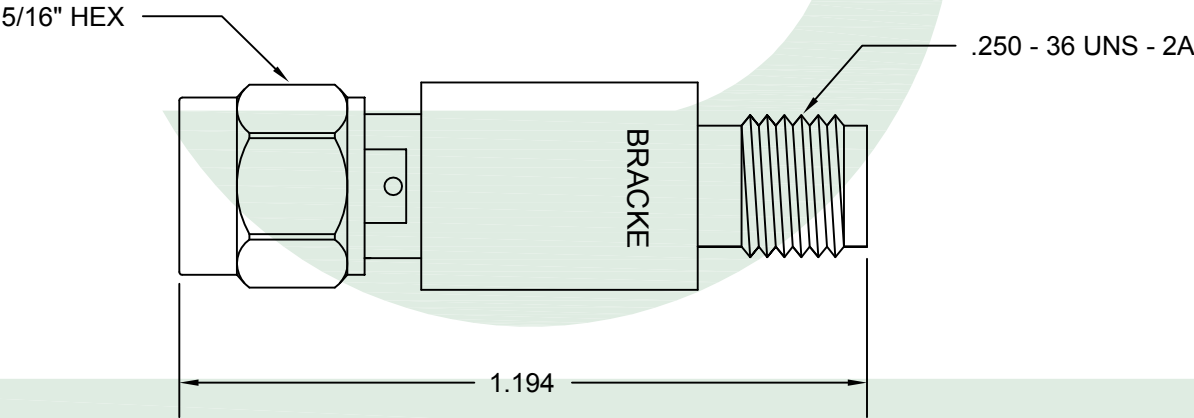

BRACKE
Bracke Manufacturing, LLC

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description	CAGE / NAGE	
	BM10057.10			6LOW2	
			SMA Male to Female, 10 dB 50 Ohm [DC Bias Passing Attenuator, Max VSWR 1.35:1 @ 3 GHz]	Scale	Unit
				3:1	Inches
				Date	Revision
	Produced By	Checked By	Notes		
002	013	<ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2014 Bracke Manufacturing, LLC</div>	05/21/2014	A-01	