


MATERIALS	SMA CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
ELECTRICALS	FREQUENCY RANGE (GHz)	2 - 4
	VSWR (MAX)	1.25:1
	INSERTION LOSS (dB MAX)	0.50
	ISOLATION (dB MIN)	18
	AVERAGE POWER (WATTS)	20
	PEAK POWER (WATTS)	30
	OPERATING TEMP (°C)	0 to +50

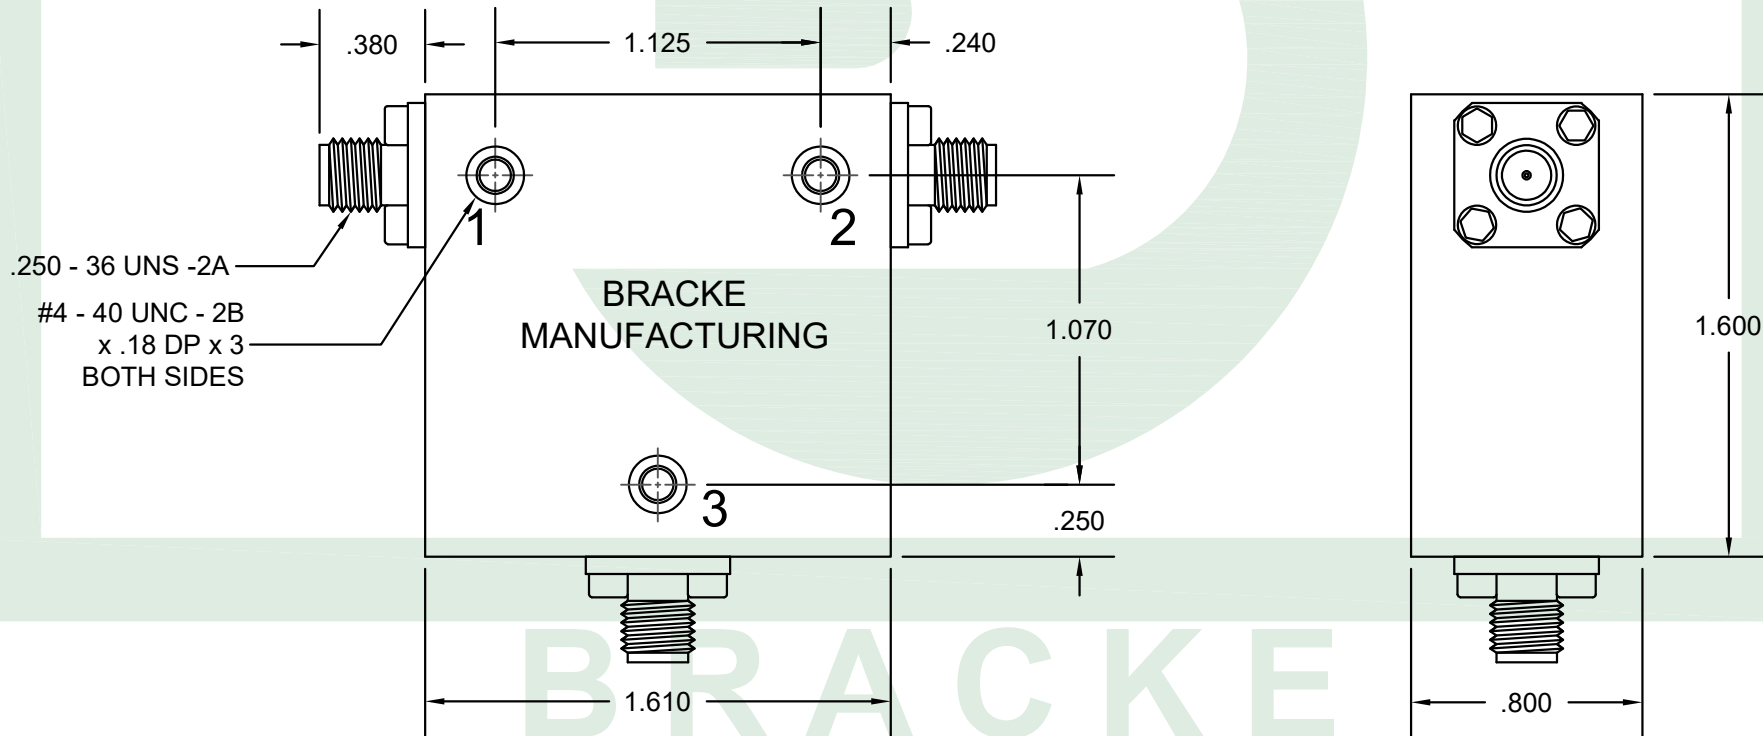

**Bracke Manufacturing, LLC**  
 PO Box 12319  
 Newport Beach, Ca 92658  
 Phone (949)756-1600 / Fax (949) 756-1601  
 sales@brackemfg.com / www.brackemfg.com

Part Number	
<b>BM13303</b>	
Produced By	Checked By
002	013

Description	Notes
<b>SMA Female, 20 Watts, Max VSWR 1.25:1 @ 4 GHz</b> 50 Ohm [Circulator]	<ul style="list-style-type: none"> <li>Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li> <li>The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li> </ul>
©2020 Bracke Manufacturing, LLC	

CAGE / NAGE	
6LOW2	
Scale	Units
1.5:1	Inches
Date	Revision
01/30/2020	A-01