


M A T E R I A L S	7/16 DIN CONNECTORS	BRASS WHITE BRONZE PLATED
	CONTACTS	SILVER PLATED
	INSULATORS	PTFE
	HOUSING	ALUMINUM
E P L O C P E R I T I C A L	IMPEDANCE (OHM)	50
	FREQUENCY RANGE (GHz)	DC - 7.5
	VSWR (MAX)	1.45:1
	INPUT POWER (WATTS)	10
	PEAK POWER (WATTS MAX)	500
	ATTENUATION (dB)	30
	ACCURACY (dB)	+/- .7
	OPERATING TEMP. RANGE (°C)	-65 to +125



BRACKE

Bracke Manufacturing, LLC

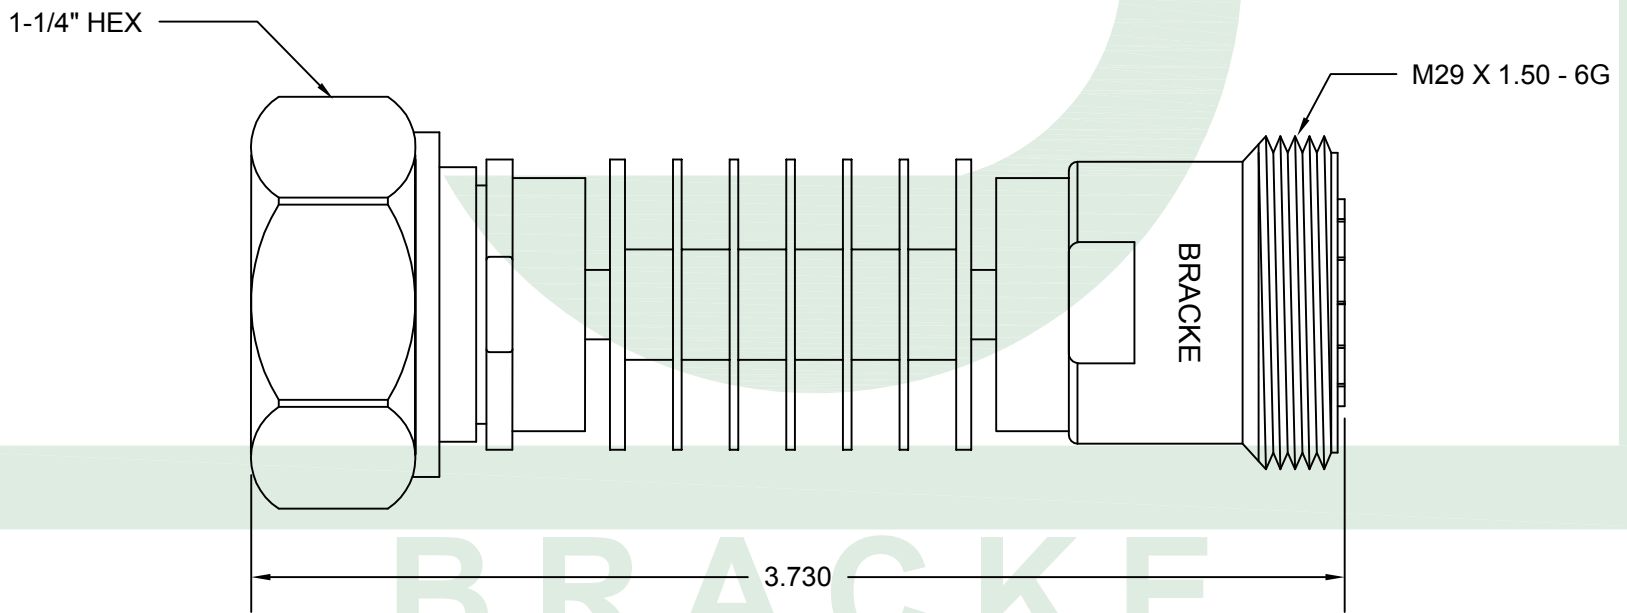

Bracke Manufacturing, LLC
 PO Box 12319
 Newport Beach, Ca 92658
 Phone (949)756-1600 / Fax (949) 756-1601
 sales@brackemfg.com / www.brackemfg.com

Part Number	
BM10083.30	
Produced By	Checked By
002	013

Description	
7/16 DIN Male to Female, 30 dB 50 Ohm [Attenuator, Max VSWR 1.45:1 @ 7.5 GHz]	
Notes	
<ul style="list-style-type: none"> • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 	
©2016 Bracke Manufacturing, LLC	

CAGE / NAGE	
6LOW2	
Scale	Unit
1.5:1	Inches
Date	Revision
01/08/2016	A-01