






MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	TIN PLATED
INSULATOR	PTFE

HARDWARE	
	
NUT	WASHER

ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	75 OHM
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	1 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.20:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	400 VOLTS
INTERFACE	ANSI / SCTE
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

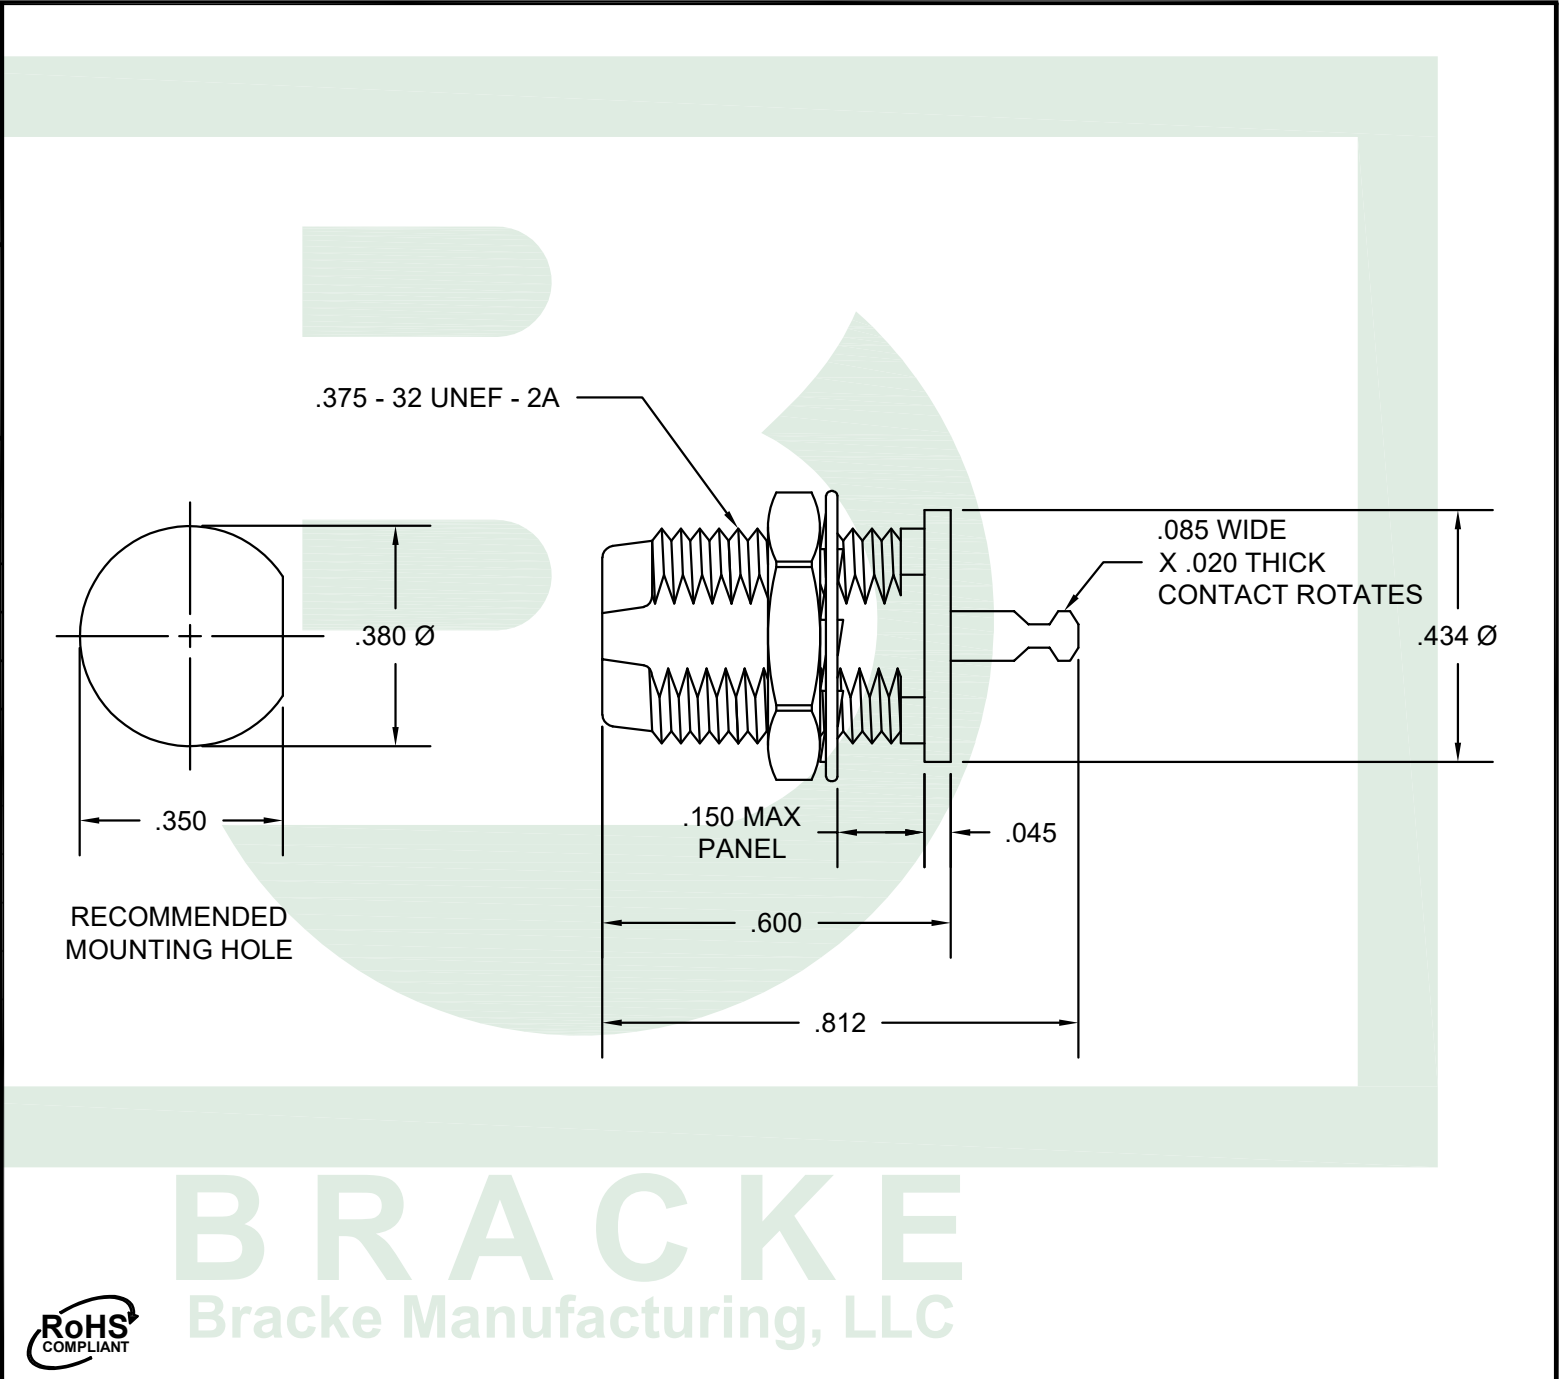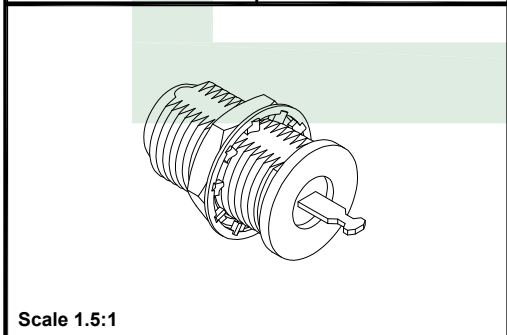

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description	CAGE / NAGE	
	BM61126			6LOW2	
	Produced By	Checked By	Notes	Scale	Unit
	002	007		3:1	Inches
				Date	Revision
				10/11/2023	A-01
		• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2023 Bracke Manufacturing, LLC			