




MATERIALS	
BODY	PASSIVATED STAINLESS STEEL/ BERYLLIUM COPPER GOLD PLATED
COUPLING NUT	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	MODIFIED PPO
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	26.5 GHz
DIELECTRIC WITHSTANDING VOLTAGE	500 Vrms
VSWR MAX	1.25:1
INSERTION LOSS MAX	.05 $\sqrt{\text{Freq. GHz}}$
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	335 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

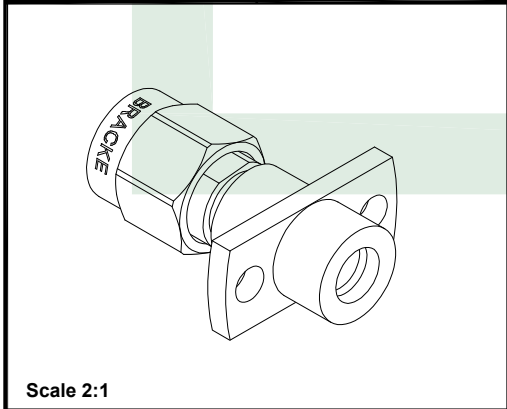

Scale 2:1

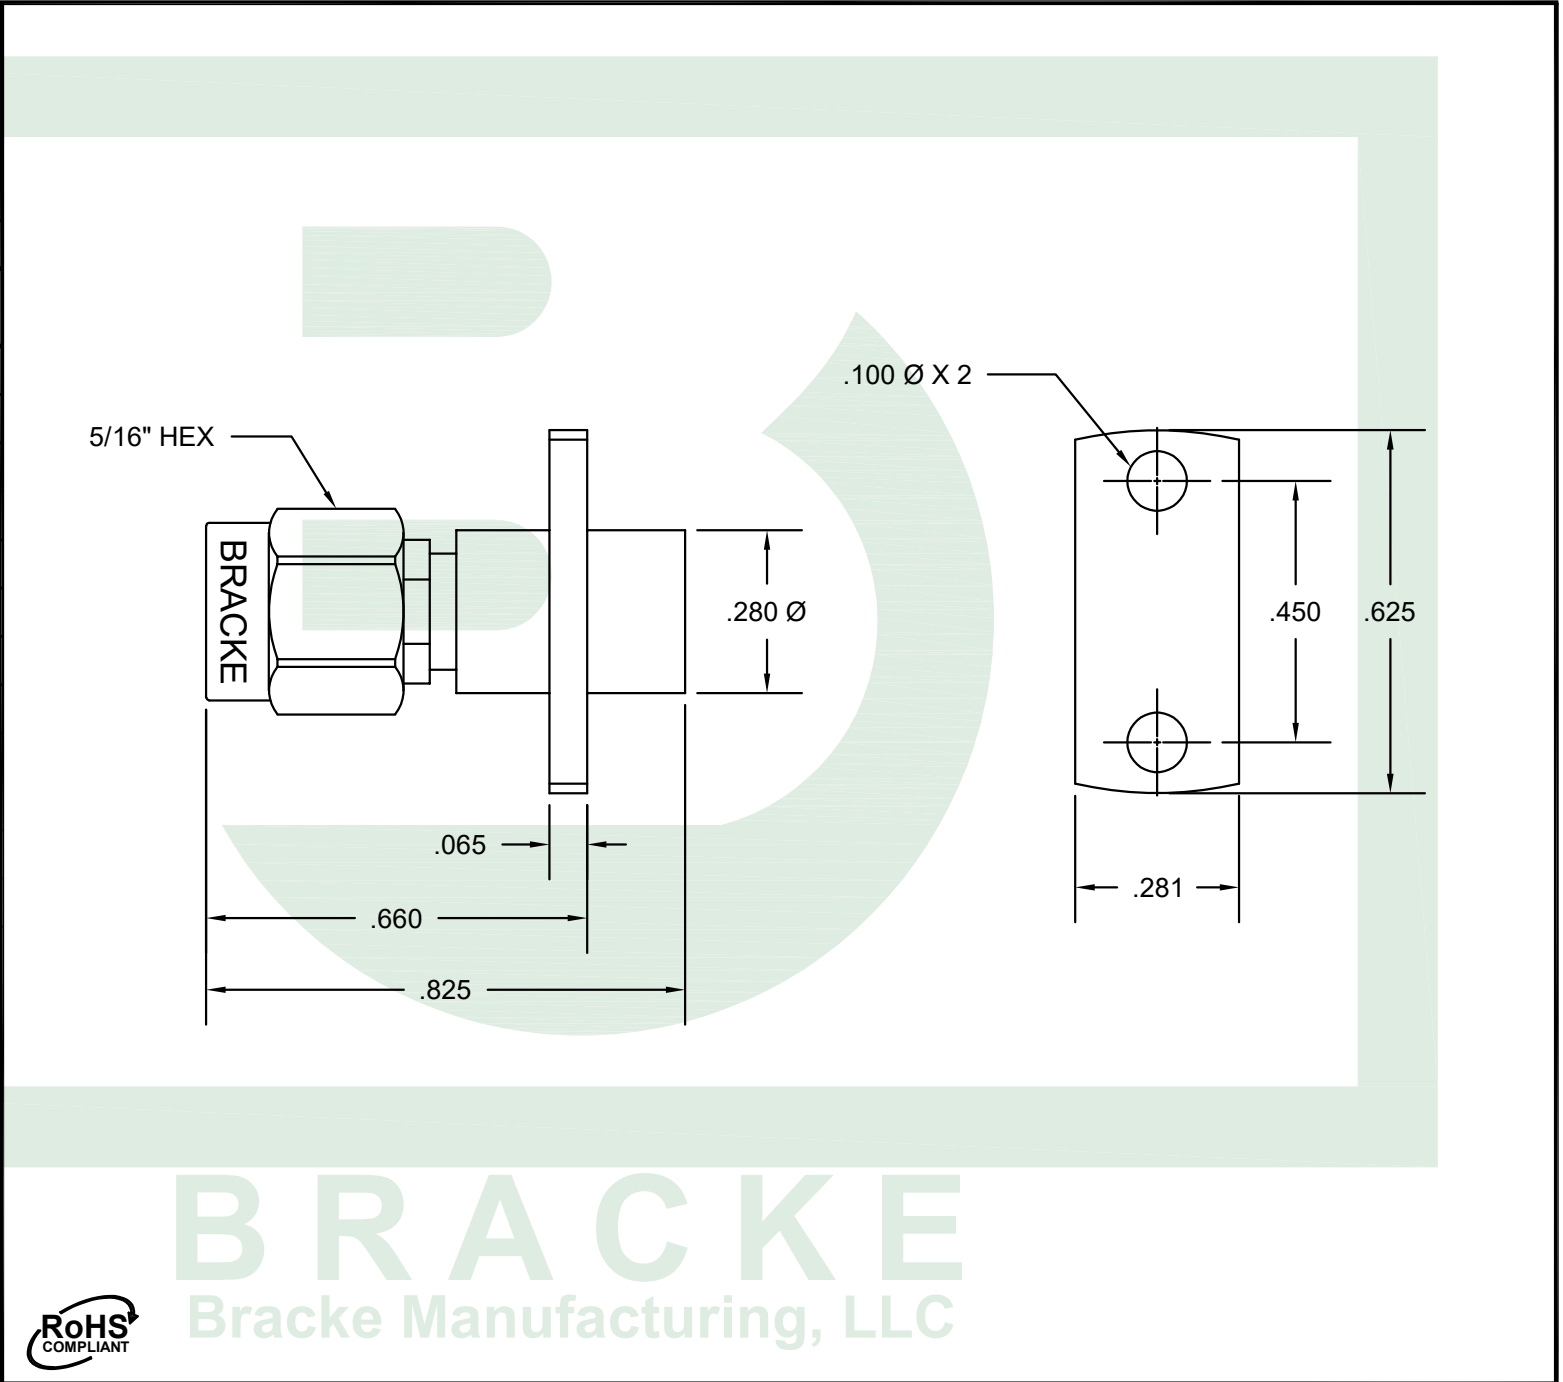

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM51024		SMP Male Limited Detent to SMA Male 2 Hole Panel Mount [Precision Adapter]		6LOW2	
					Scale	Unit
					3:1	Inches
					Date	Revision
	002	007	<div>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</div> <div>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</div> <div>©2023 Bracke Manufacturing, LLC</div>		6/21/2023	A-01