
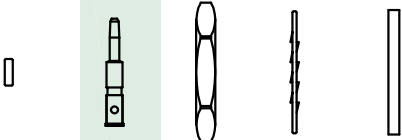



MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
GASKET	RUBBER

HARDWARE	
	
TEFLON	CONTACT
NUT	WASHER
GASKET	


ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHM
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	11 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.35:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B




Scale 1:1

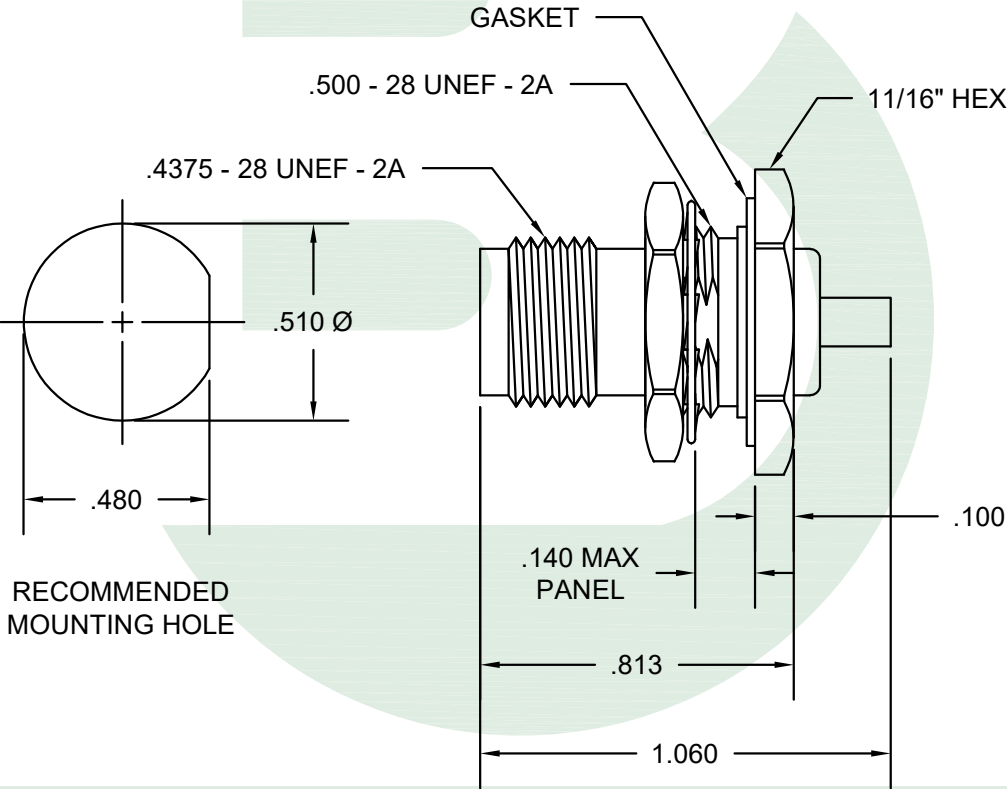


1- STRIP CABLE AS SHOWN




2- REMOVE BURRS AND SHARP EDGES FROM COPPER JACKET WITH SCOTCH BRITE (FOR COPPER CABLES ONLY)

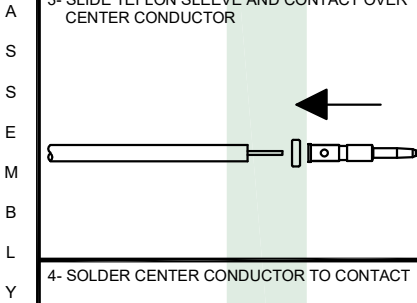


4- SOLDER CENTER CONDUCTOR TO CONTACT




5- SOLDER 360° IN AREA SHOWN

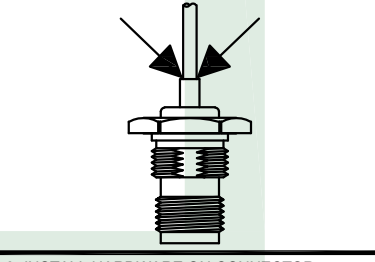

6- INSTALL HARDWARE ON CONNECTOR

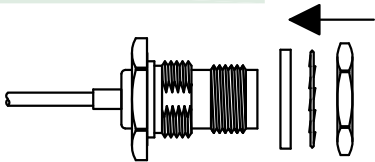

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM61322		Reverse Polarity TNC Female Bulkhead		6LOW2	
	Solder Connector [RG405, RG405-Alum, RG405-Flex, RG405-Flex-Jacketed]				Scale	Unit
					2:1	Inches
					Date	Revision
			Notes • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2023 Bracke Manufacturing, LLC		11/16/2023	A-01