


M A T E R I A L S	SMA CONNECTORS	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L O C T E R I T I C I A L S	FREQUENCY RANGE (GHz)	2 - 4
	VSWR (MAX)	1.30:1
	INSERTION LOSS (dB MAX)	0.50
	ISOLATION (dB MIN)	18
	AVERAGE POWER (WATTS) (PORT 1 TO 2)	30
	REFLECTIVE POWER (TERM) (WATTS)	2
	PEAK POWER (WATTS)	50
	OPERATING TEMP (°C)	0 to +50

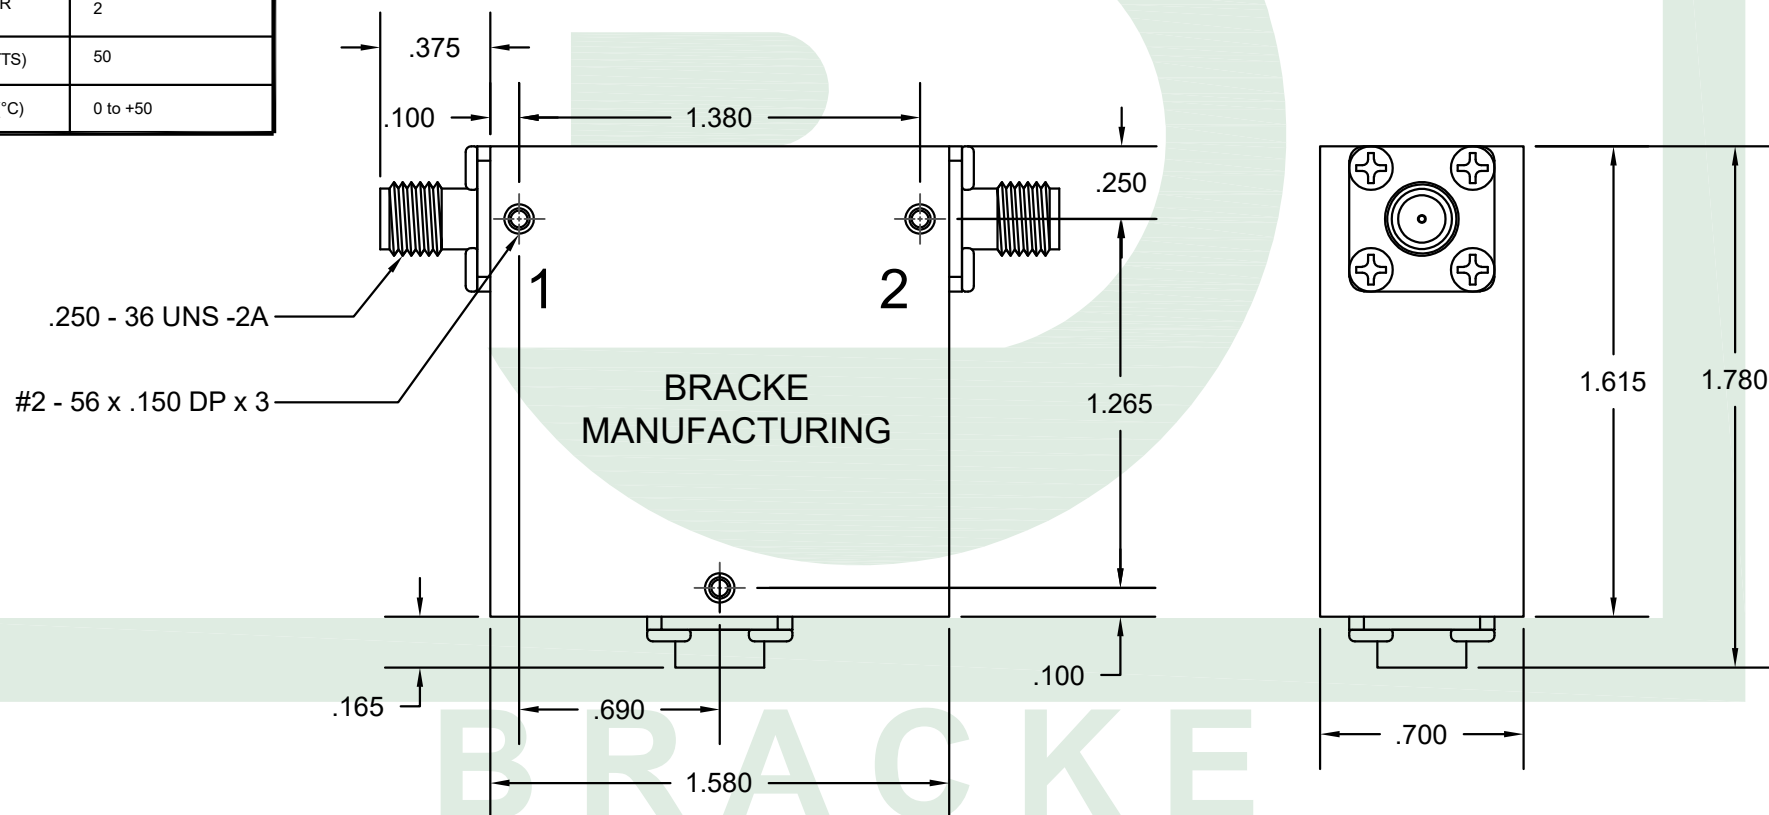

Bracke Manufacturing, LLC
 PO Box 12319
 Newport Beach, Ca 92658
 Phone (949)756-1600 / Fax (949) 756-1601
 sales@brackemfg.com / www.brackemfg.com

Part Number		Description		CAGE / NAGE	
BM13302		SMA Female, 2 Watts, Max VSWR 1.30:1 @ 4 GHz		6LOW2	
50 Ohm [Isolator]				Scale	Units
				1.5:1	Inches
Produced By	Checked By	Notes		Date	Revision
012	013	<ul style="list-style-type: none"> Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 		07/10/2015	A-01
		©2020 Bracke Manufacturing, LLC			