

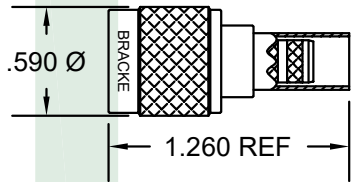



CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHM	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELD TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHM
BODY	BRASS NICKEL PLATED	JACKET	.240" Ø POLYETHYLENE	NOMINAL CAPACITANCE	24.2 PF/FOOT	BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	DIELECTRIC	.150" Ø FPE	MAX OPERATING VOLTAGE	5,000 VOLTS RMS	CONTACT	GOLD PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.056 Ø BARE COPPER	OPERATING TEMPERATURE	-40°C TO +85°C	INSULATOR	PTFE

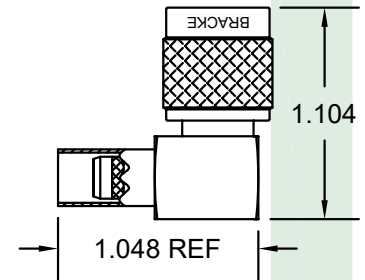

BM61407

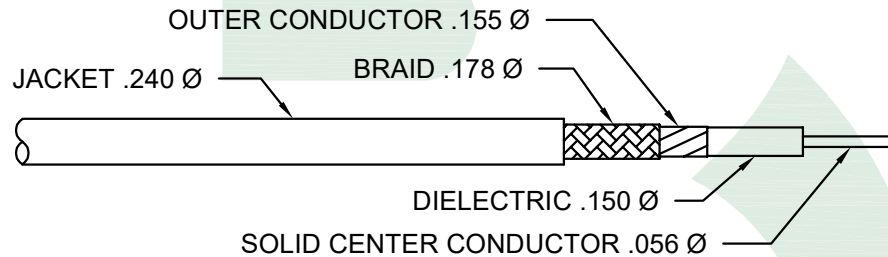


BM61415

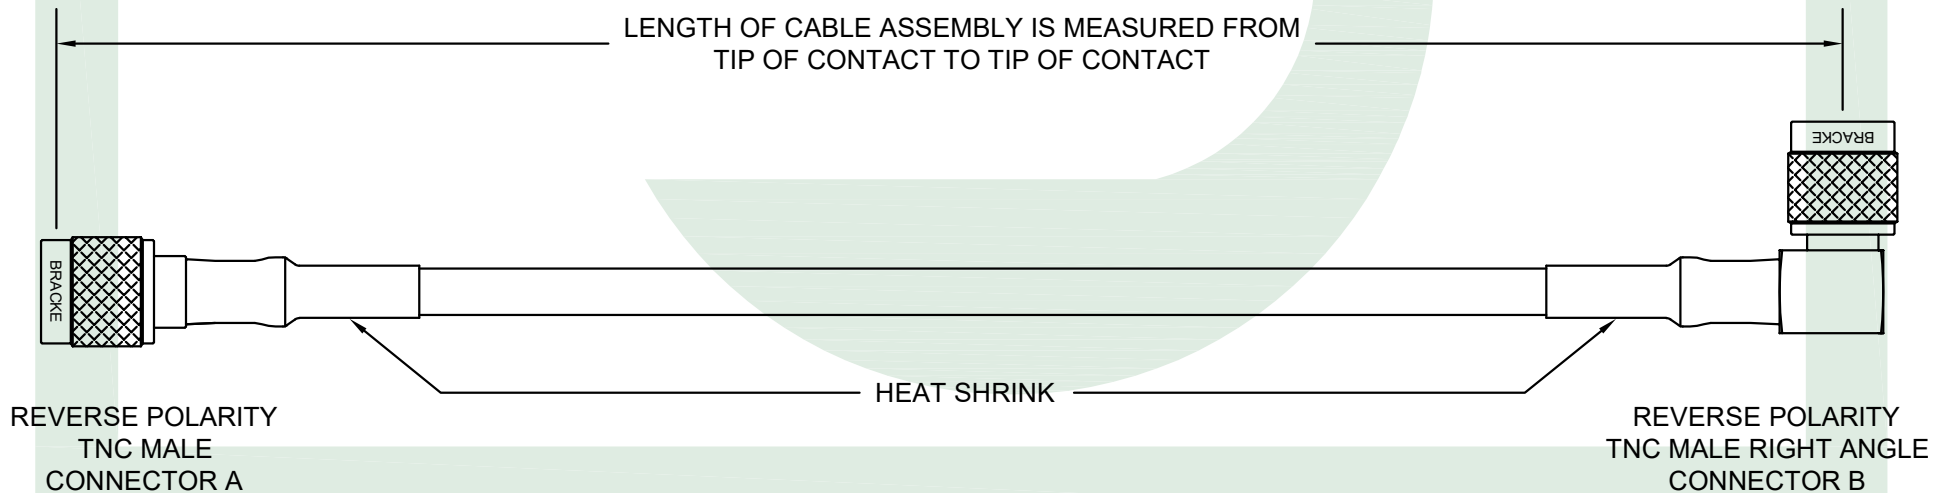

**BRACKE**  
Bracke Manufacturing, LLC

LMR® is a registered trademark of Times Microwave Systems

 <b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	<b>BM92938.**</b>				6LOW2	
	Produced By	Checked By	<b>Notes</b> <ul style="list-style-type: none"><li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li><li>• Standard cable length tolerance is <math>\pm 1.5\%</math> or 3/8 inch, whichever is greater</li><li>• Replace ** with ANY length in Inches</li></ul>		Scale	Unit
	002	014			1:1	Inches
					Date	Revision
					07/09/2025	A-01
		©2025 Bracke Manufacturing, LLC				

©2025 Bracke Manufacturing, LLC