

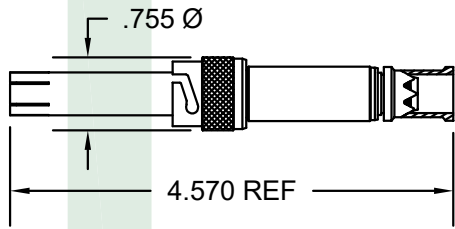
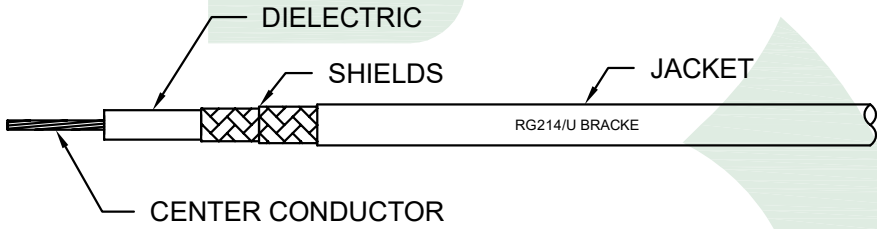


CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELDS SILVER PLATED COPPER	IMPEDANCE	50 OHMS
BODY	BRASS NICKEL PLATED	JACKET	.425" Ø BLACK POLYVINYL CHLORIDE NON-CONTAMINATING	NOMINAL CAPACITANCE	30.8 PF/FOOT	BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	DIELECTRIC	.285" Ø PE	MAX OPERATING VOLTAGE	5,000 VOLTS RMS	CONTACT	GOLD PLATED
INSULATOR	HDPE	CENTER CONDUCTOR	.0888" Ø (7 STRANDS .0296" Ø) SILVER PLATED COPPER	OPERATING TEMPERATURE	-40°C TO +80°C	INSULATOR	HDPE
GASKETS	RUBBER					GASKETS	RUBBER
 BM61032						 BM61309	

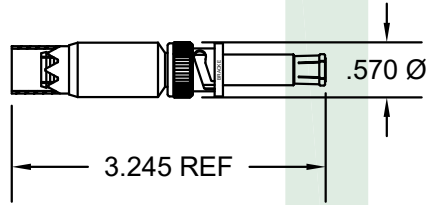

BRACKE
Bracke Manufacturing, LLC

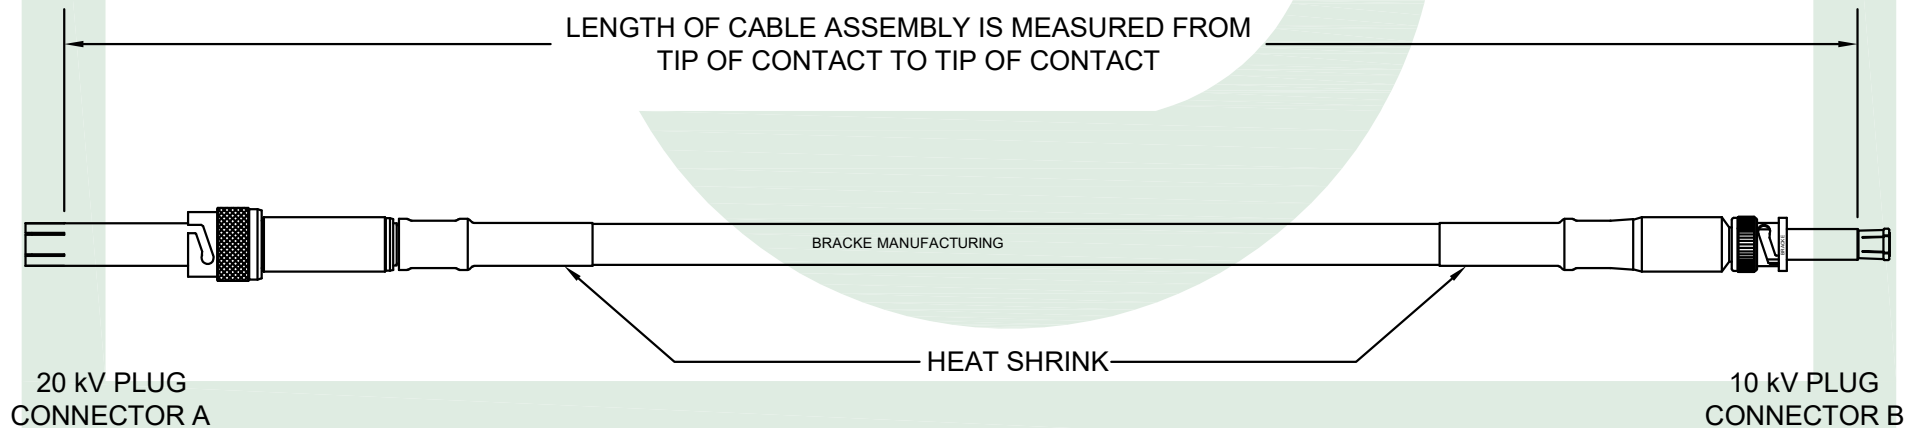

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949) 756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description		CAGE / NAGE	
BM90493.**		20 kV Plug to 10 kV Plug, RG214/U [Cable Assemblies]		6LOW2	
				Scale	Unit
				1/2:1	Inches
Produced By	Checked By	Notes		Date	Revision
002	013	• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. • Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater • Replace ** with ANY length in Inches		04/01/2022	A-01
©2022 Bracke Manufacturing, LLC					