


M A T E R I A L S	WAVEGUIDE BODY	ALUMINUM
	CONNECTOR	PASSIVATED STAINLESS STEEL
	CONTACT	GOLD PLATED
	INSULATOR	PTFE
	O - RING	RUBBER
E L E C T R I C A L S	IMPEDANCE (OHM)	50
	WAVEGUIDE	CPR - 187G
	FREQUENCY RANGE (GHz)	3.95 - 5.85
	VSWR (MAX)	1.30:1

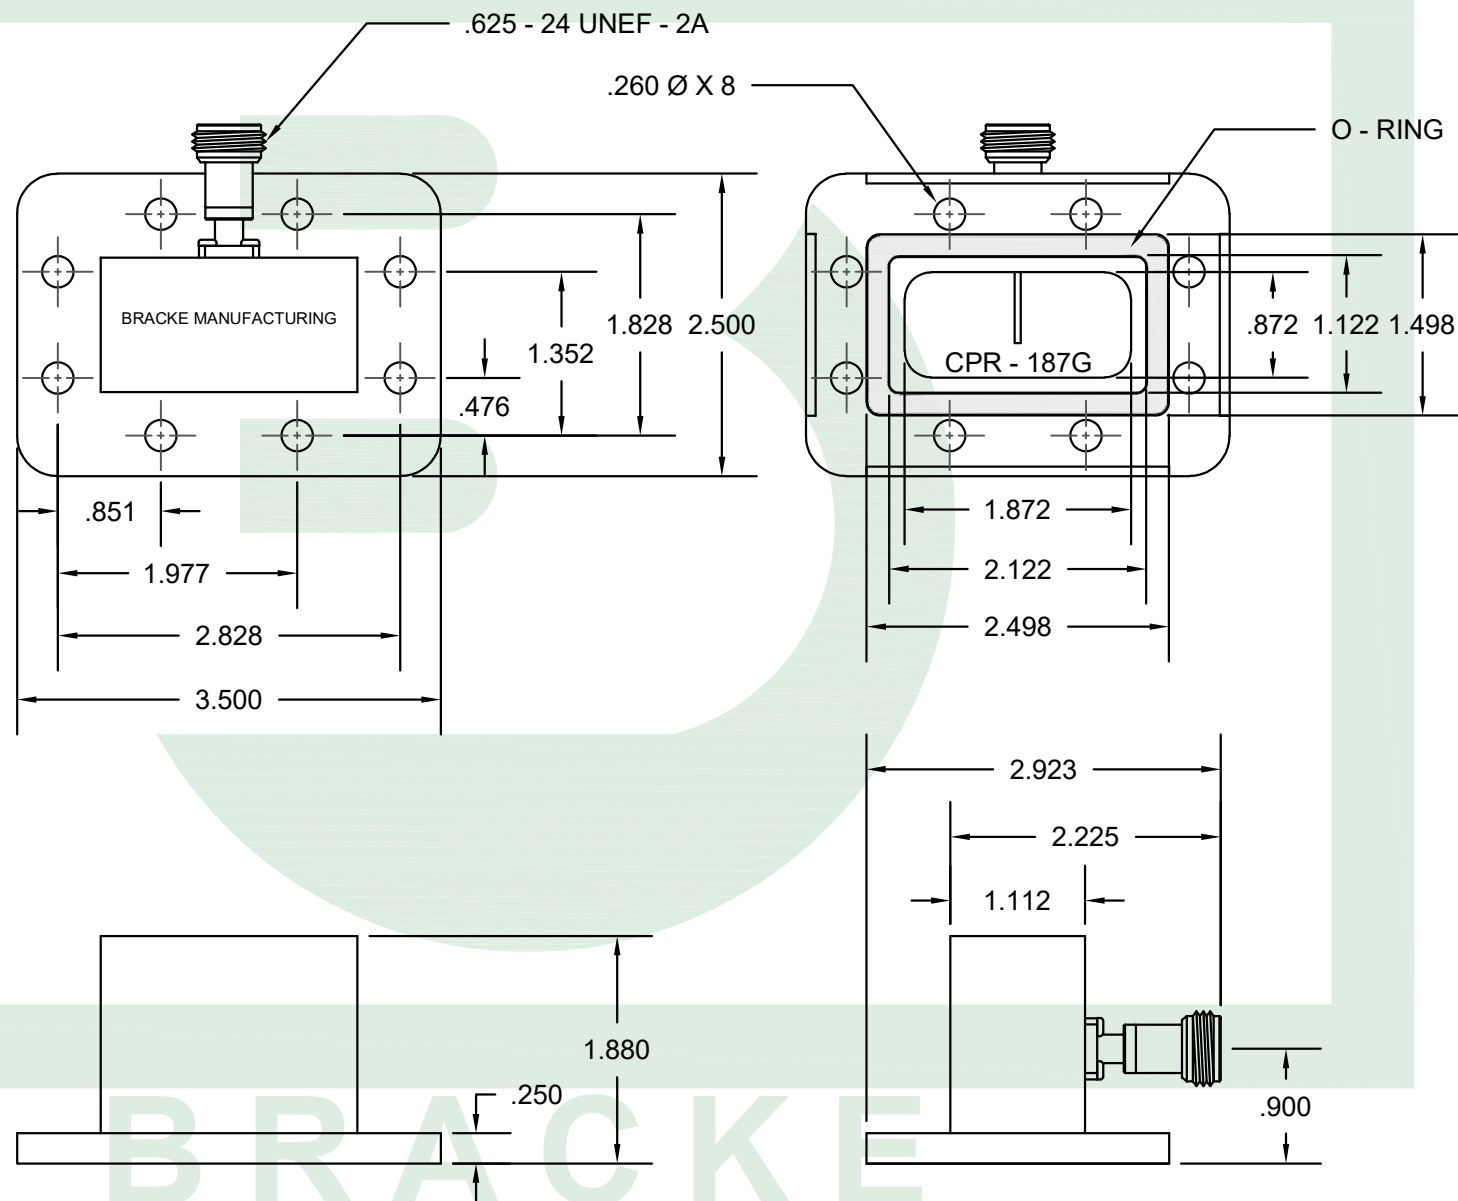

Bracke Manufacturing, LLC
 PO Box 12319
 Newport Beach, Ca 92658
 Phone (949)756-1600 / Fax (949) 756-1601
 sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE	
BM75030			6LOW2	
			Scale	Unit
			5/8:1	Inches
Produced By	Checked By	Notes	Date	Revision
002	013	• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2022 Bracke Manufacturing, LLC	11/18/2022	A-01

©2022 Bracke Manufacturing, LLC