


MATERIALS	SMA CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
ELECTRICALS	FREQUENCY RANGE (GHz)	18 - 26.5
	VSWR (MAX)	1.40:1
	INSERTION LOSS (dB MAX)	0.80
	ISOLATION (dB MIN)	18
	AVERAGE POWER (WATTS)	10
	PEAK POWER (WATTS)	30
	OPERATING TEMP (°C)	-20 to +65



**BRACKE**  
Bracke Manufacturing, LLC

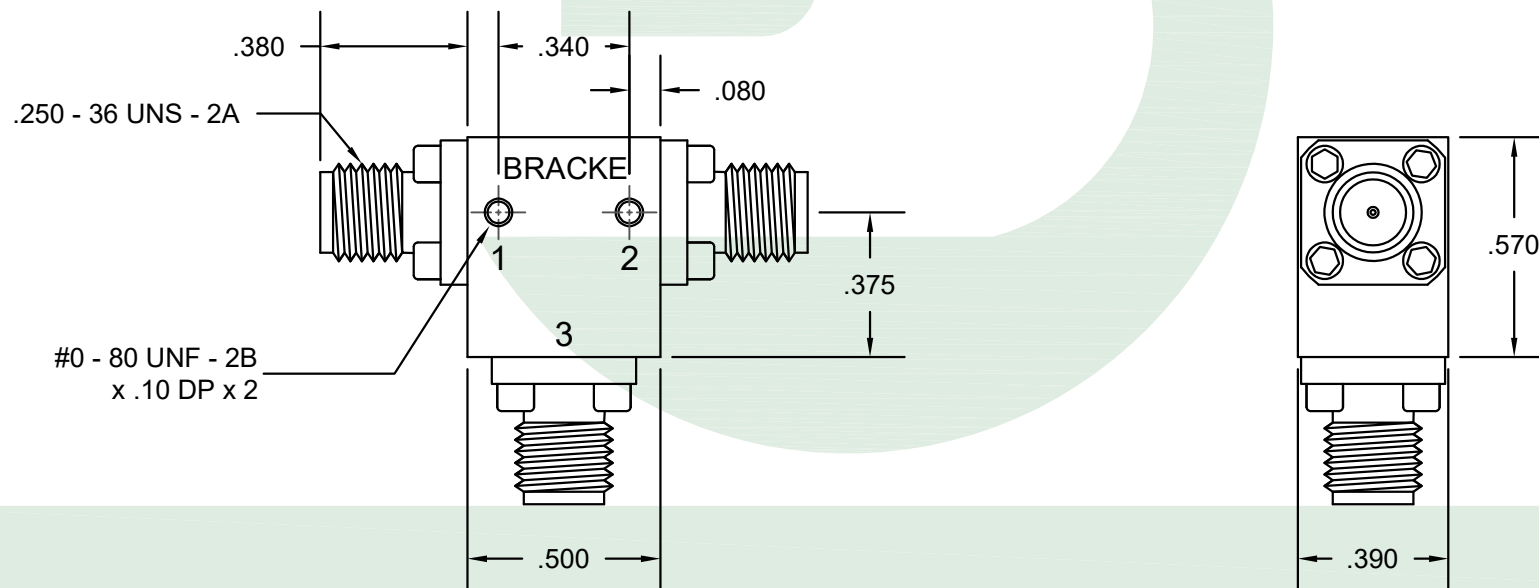

**Bracke Manufacturing, LLC**  
PO Box 12319  
Newport Beach, Ca 92658  
Phone (949)756-1600 / Fax (949) 756-1601  
sales@brackemfg.com / www.brackemfg.com

Part Number		Description		CAGE / NAGE	
<b>BM13313</b>		<b>SMA Female, 10 Watts, Max VSWR 1.40:1 @ 26.5 GHz</b>		6LOW2	
50 Ohm [Circulator]				Scale	Units
Produced By	Checked By	Notes		Date	Revision
002	013	<ul style="list-style-type: none"> <li>Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li> <li>The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li> </ul>		10/16/2015	A-01
		©2020 Bracke Manufacturing, LLC			