







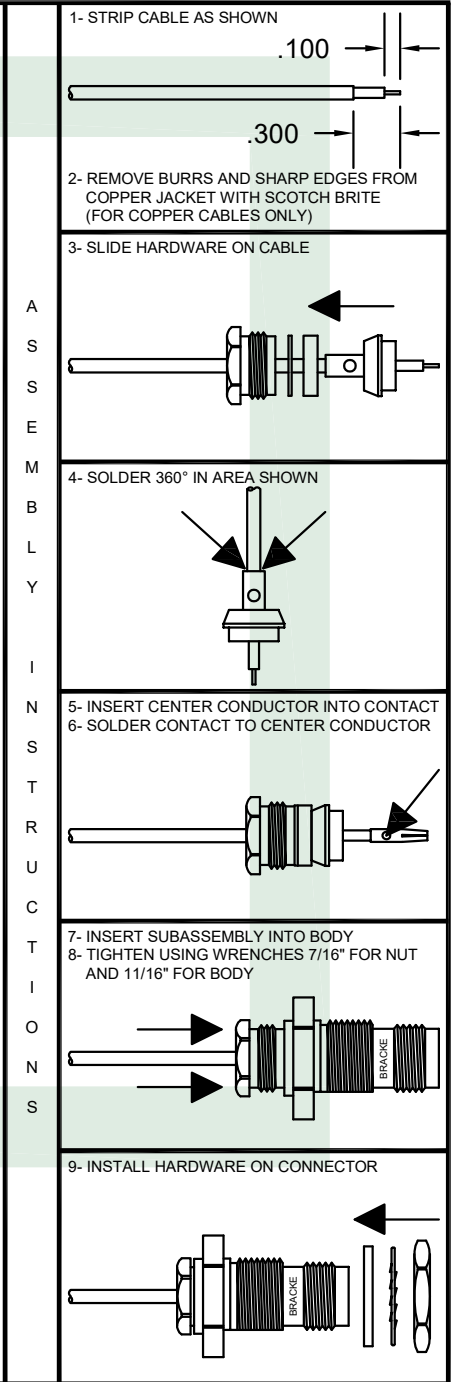
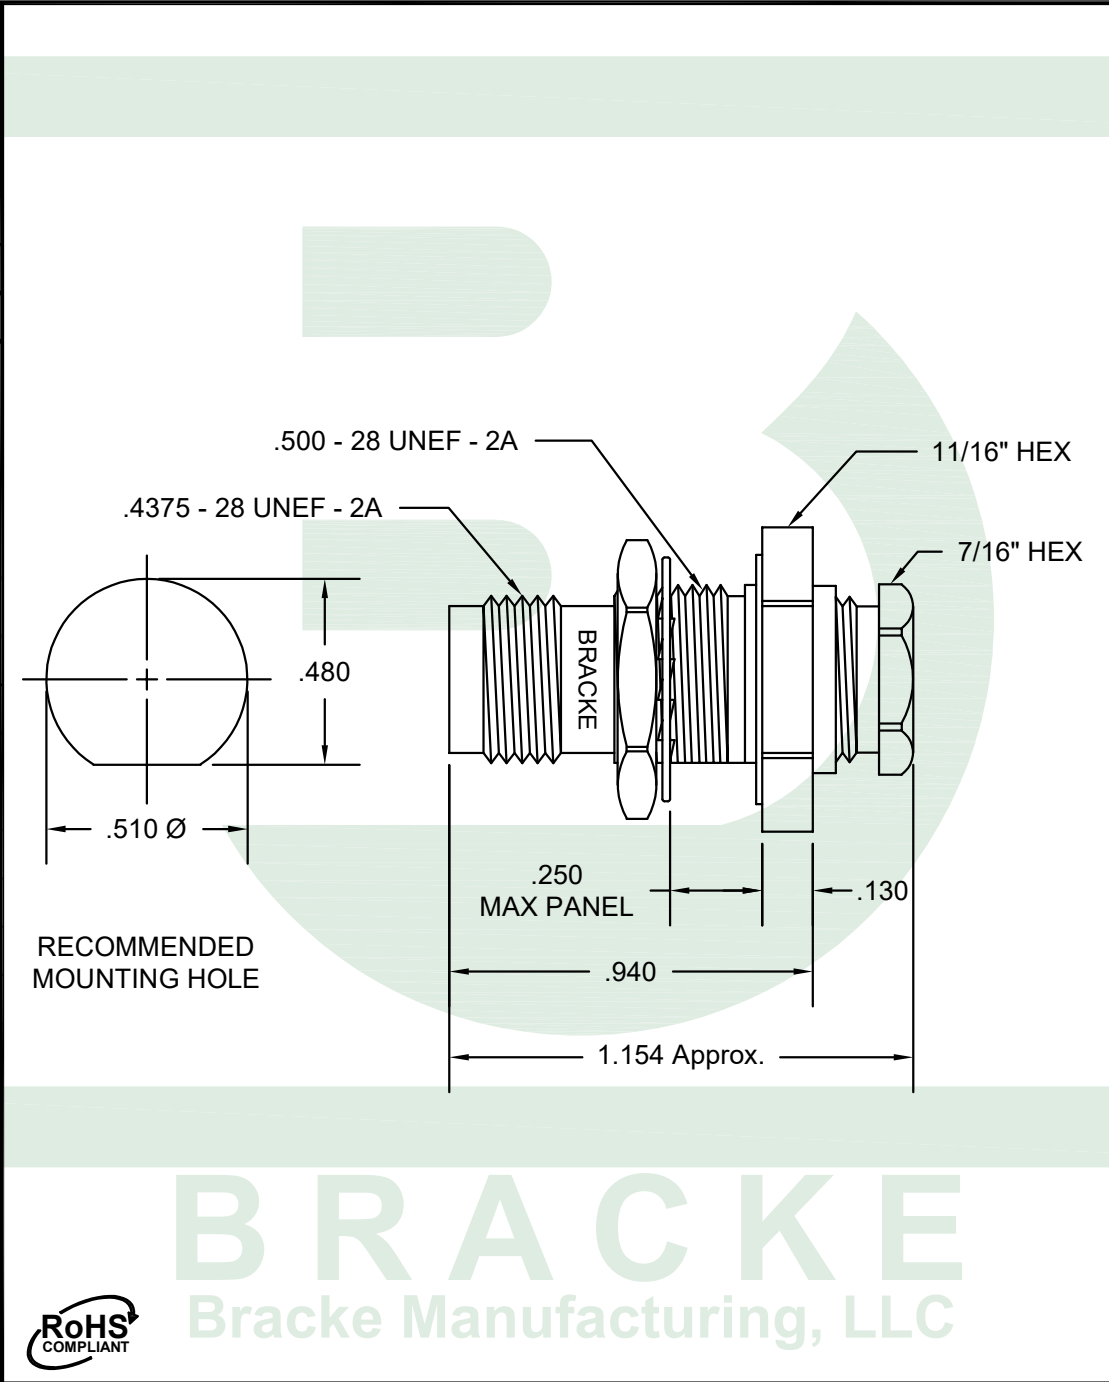
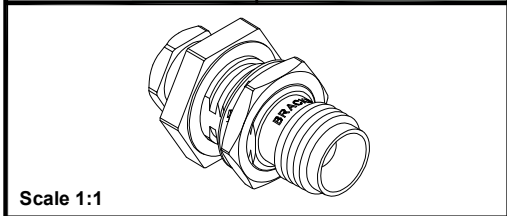



MATERIALS	
BODY	BRASS NICKEL PLATED
SOLDER SLEEVE	GOLD PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
GASKET / O-RING	RUBBER

HARDWARE			
			
CLAMP NUT	WASHER	GASKET	SOLDER SLEEVE
			
CONTACT	NUT	WASHER	GASKET

ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	11 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.50:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B



 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM60546		TNC Female Bulkhead Solder/Clamp Connector [RG405, RG405-Alum, RG405-Flex, RG405-Flex-Jacketed]		6LOW2	
					Scale	Unit
	Produced By		Checked By		2:1	Inches
	002		007		Date	Revision
					8/15/2023	A-01
		<div>Notes</div> <div><ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</div> <div>©2023 Bracke Manufacturing, LLC</div>				