

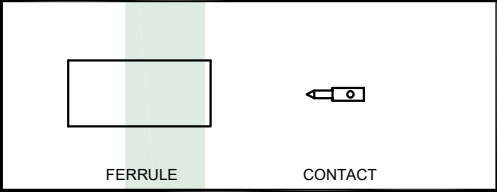
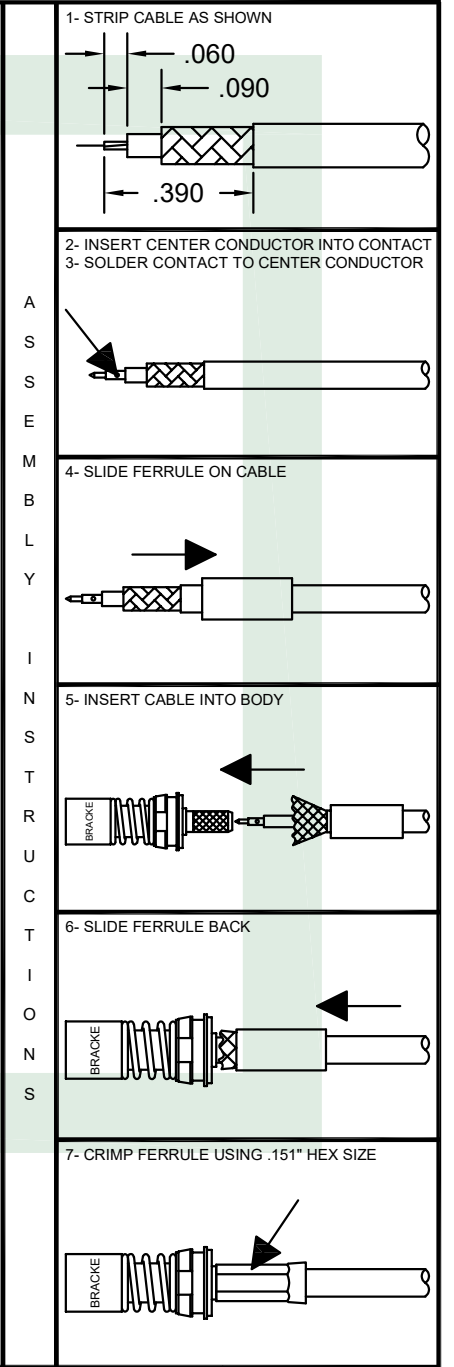



MATERIALS	
BODY	STAINLESS STEEL GOLD PLATED
SPRING	STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE

HARDWARE	
----------	--

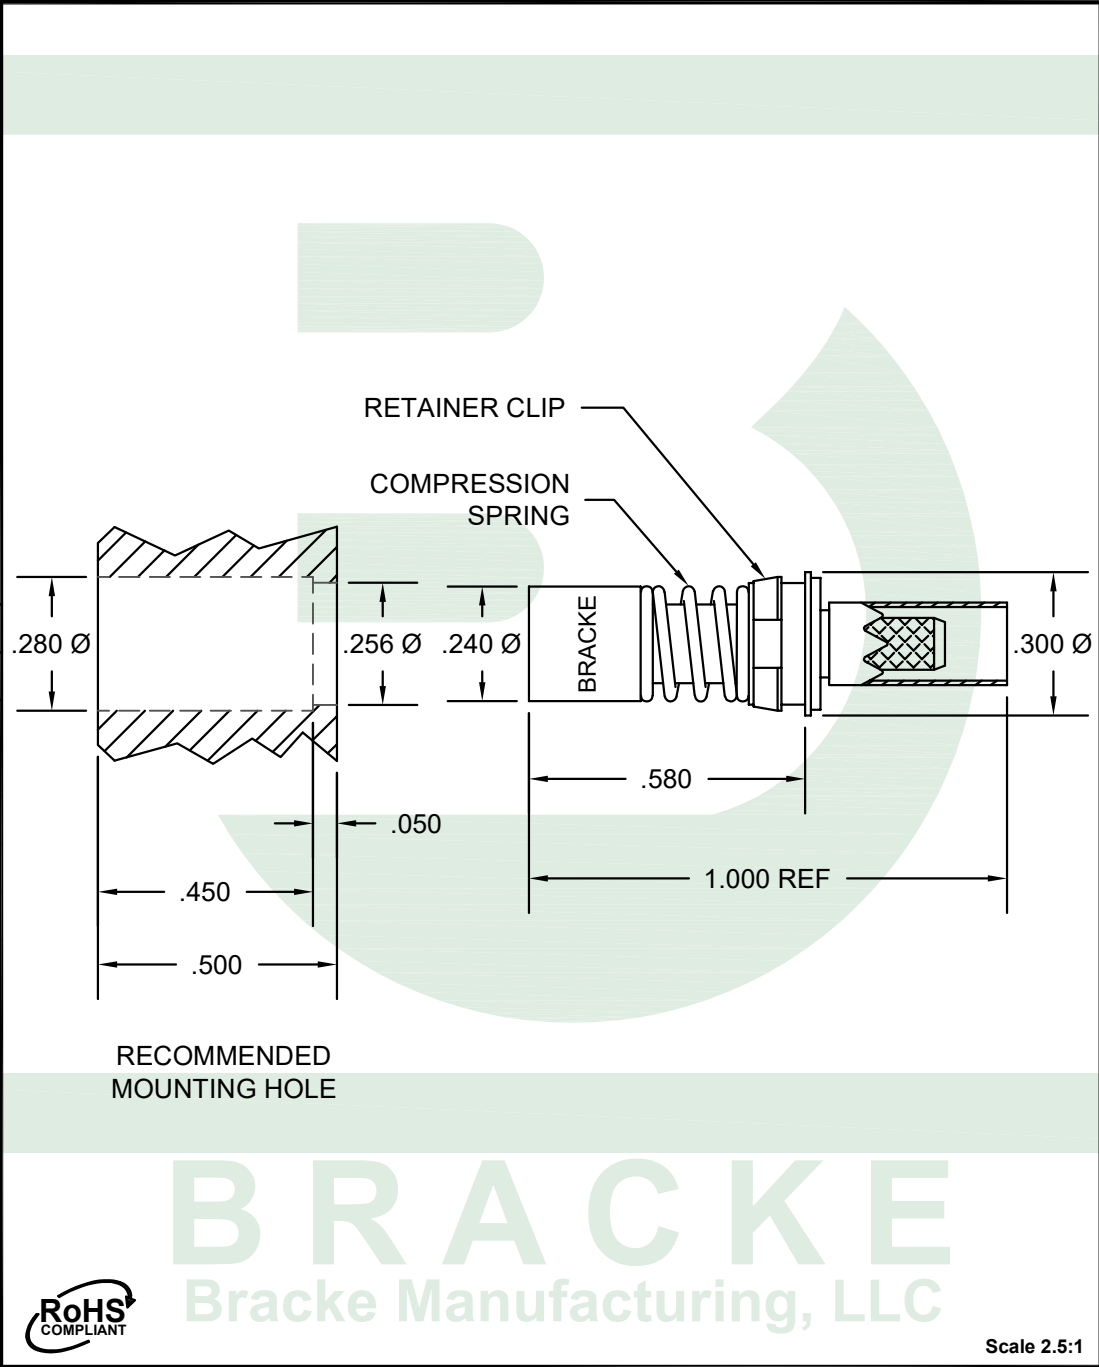

ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	28 GHz
DIELECTRIC WITHSTANDING VOLTAGE	675 Vrms
VSWR TYPICAL	1.35:1
INSERTION LOSS TYPICAL	.05 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +105 C°
VOLTAGE RATING	335 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION D
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

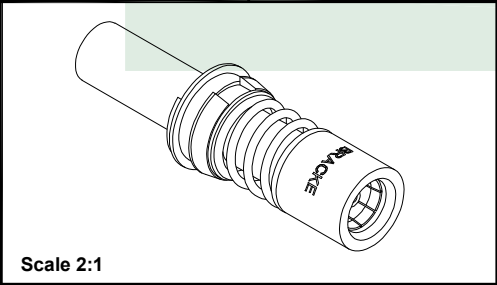

 <div>Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	Part Number		Description		CAGE / NAGE		
	BM61002		BMMA Jack Floating Panel, Feedthru Rear Mount Crimp Connector [RG188-Double, RG316-Double]		6LOW2		
	Produced By		Checked By		Unit		
	002		014		Inches		
					Date Revision		
				<div><div><ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</div><div>©2025 Bracke Manufacturing, LLC</div></div>		7/17/2025	A-01