



CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	1 SHIELD SILVER PLATED COPPER	IMPEDANCE	50 OHMS
HOUSING	PLASTIC	JACKET	.102" Ø FLUORINATED ETHYLENE PROPYLENE	NOMINAL CAPACITANCE	29.4 PF/FOOT	HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED	DIELECTRIC	.060" Ø PTFE	MAX OPERATING VOLTAGE	1,200 VOLTS RMS	INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	CENTER CONDUCTOR	.0201" Ø (7 STRANDS .0067" Ø) SILVER CLAD COVERED STEEL	OPERATING TEMPERATURE	-55°C TO +200°C	CONTACT	GOLD PLATED
INSULATOR	PTFE					INSULATOR	PTFE
 FAKRA CONNECTOR CODE I BM61715		 DIELECTRIC SHIELD JACKET RG316/U BRACKE CENTER CONDUCTOR				 BM61715 FAKRA CONNECTOR CODE I	

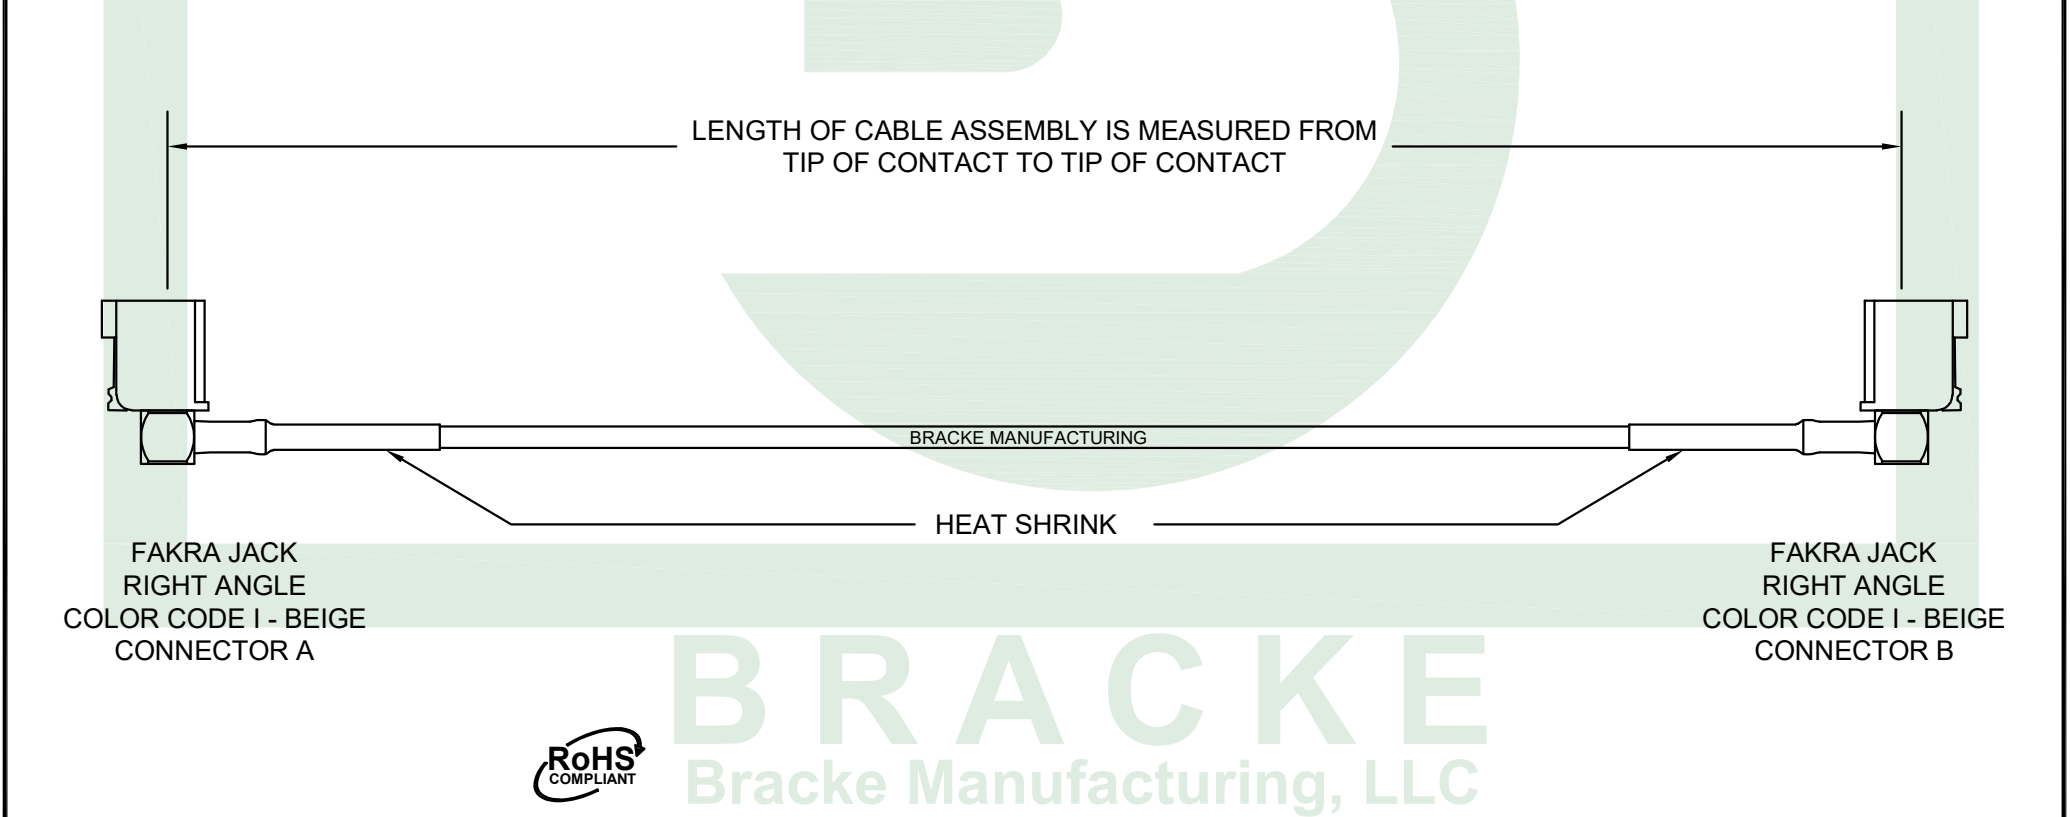

 <div><b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	Part Number		Description		CAGE / NAGE	
	BM92865.**				6LOW2	
	Produced By	Checked By	Notes		Scale	Unit
	002	014			1:1	Inches
					Date	Revision
			08/26/2024	A-01		
		©2024 Bracke Manufacturing, LLC				