


MATERIALS	
HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	1000 MΩ
OPERATING FREQUENCY	4 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.30:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-40 to +105 C°
VOLTAGE RATING	335 VOLTS
INTERFACE	USCAR-18, DIN
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B



Scale 2:1

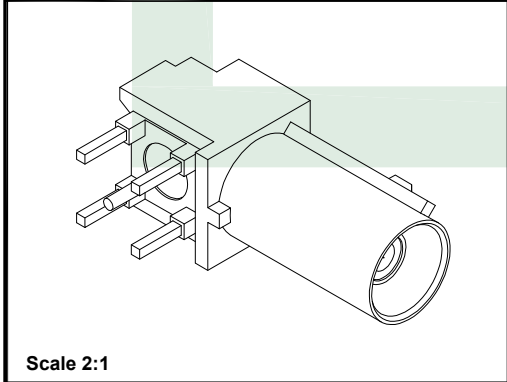

FAKRA CONNECTOR  
CODE B

BRACKE  
Bracke Manufacturing, LLC

Part Number		Description		CAGE / NAGE	
<b>BM61727</b>		<b>Fakra Plug Right Anlge P.C. Mount .036" Round Contact</b>		6LOW2	
<b>Color Code B Cream [Connector]</b>		<b>Notes</b>		<b>Scale</b>	<b>Unit</b>
<b>Produced By</b>	<b>Checked By</b>	<ul style="list-style-type: none"> <li>Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li> <li>The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li> </ul>		3:1	Inches
002	014			<b>Date</b>	<b>Revision</b>
		©2024 Bracke Manufacturing, LLC		8/05/2024	A-01

