


M
A
T
E
R
I
A
L
S

BNC CONNECTORS	BRASS NICKEL PLATED
CONTACTS	SILVER PLATED
INSULATORS	PTFE

E
P
I
T
H
E
T
I
C
A
L
S


IMPEDANCE (OHM)	50
FREQUENCY RANGE (MHz)	DC - 750
VSWR (MAX)	1.40:1
INPUT POWER (WATTS)	1
PEAK POWER (WATTS)	100
ATTENUATION RANGE (dB)	0 - 65 dB in 1 dB STEPS
ATTENUATION STEPS (dB)	1, 2, 4, 8, 10, 20 and 20
ACCURACY (dB)	+/- 1.30
INSERTION LOSS (dB MAX)	1.00
OPERATING TEMP. RANGE (°C)	-40 to +70

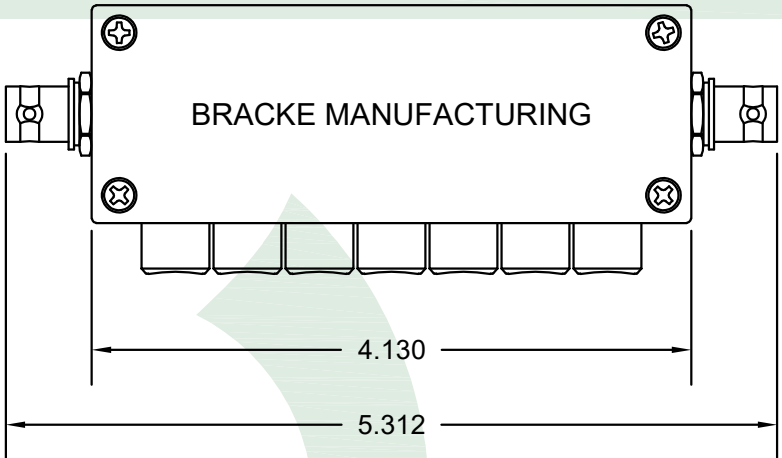

BRACKE MANUFACTURING

4.130

5.312

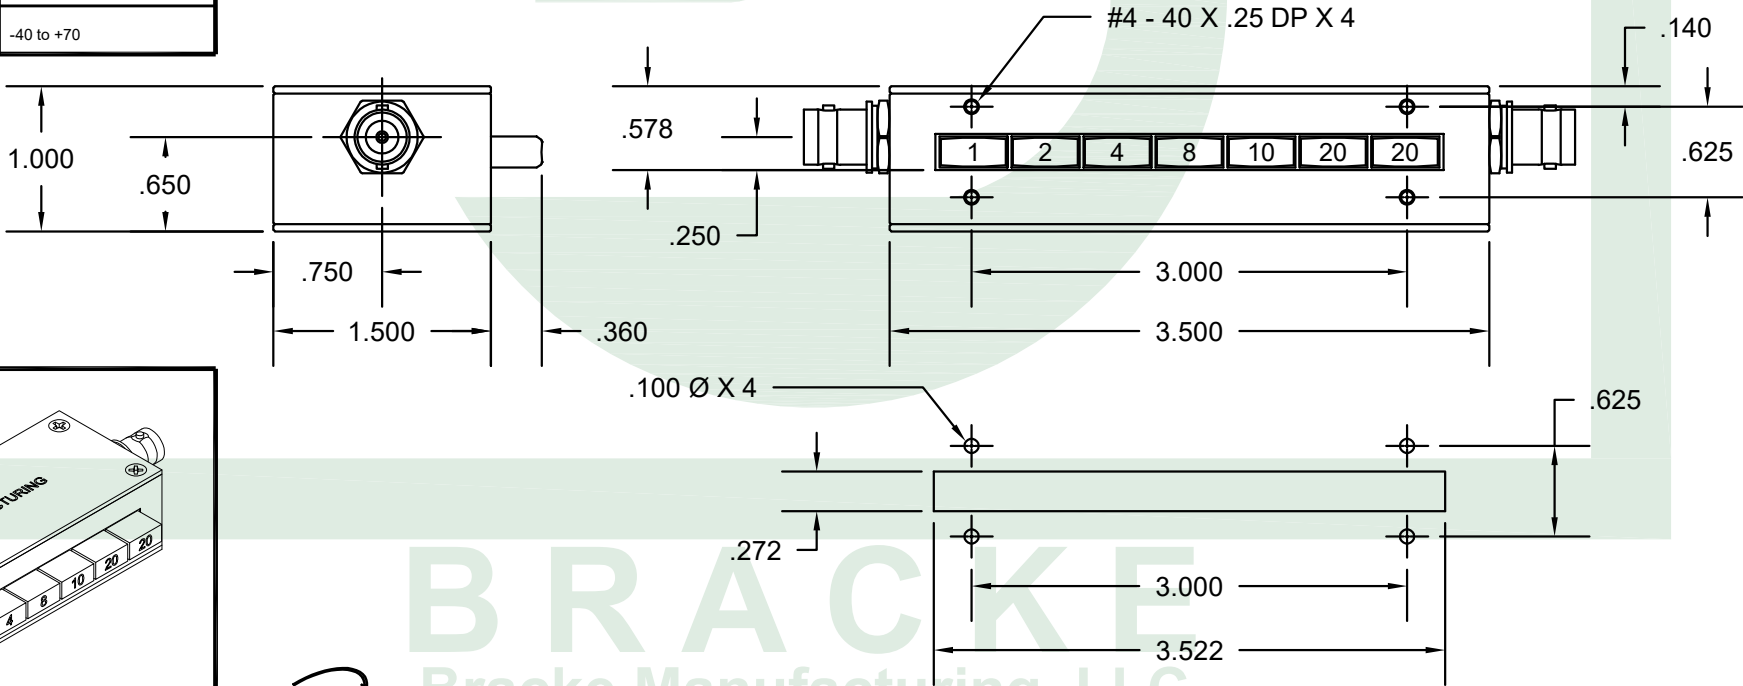

1.000

.650

.750

1.500

.360

.578

.250

.140

.625

3.000

3.500

.100 Ø X 4

.272


3.000

3.522

.625

1 2 4 8 10 20 20

#4 - 40 X .25 DP X 4

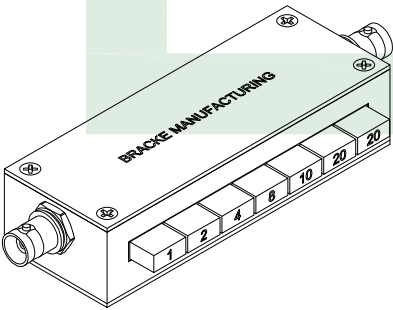

BRACKE MANUFACTURING

1 2 4 8 10 20 20



RECOMMENDED MOUNTING HOLES



Bracke Manufacturing, LLC

PO Box 12319

Newport Beach, Ca 92658

Phone (949)756-1600 / Fax (949) 756-1601

sales@brackemfg.com / www.brackemfg.com

Part Number	
BM10040	
Produced By	Checked By
002	014

Description

BNC Female

50 Ohm [Pushbutton Attenuator, Max VSWR 1.40:1 @ 750 MHz]

Notes

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2024 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Unit
3/4:1	Inches
Date	Revision
1/05/2024	A-01