


M A T E R I A L S	7/16 DIN CONNECTORS	BRASS WHITE BRONZE PLATED	
	CONTACTS	SILVER PLATED	
	INSULATORS	PTFE	
	HOUSING	ALUMINUM	
E L E C T R I C A L S	IMPEDANCE (OHM)	50	
	FREQUENCY RANGE (GHz)	DC - 7.5	
	VSWR (MAX)	DC - 4	1.25:1
		4 - 7.5	1.45:1
	PEAK POWER (WATTS MAX)	500	
	INPUT POWER (WATTS)	25	
	ATTENUATION (dB)	30	
	ACCURACY (dB)	+/- 1.0	
	OPERATING TEMP. RANGE (°C)	-65 to +125	

UNIT MUST BE MOUNTED IN SUCH A WAY TO  
ALLOW FOR FREE AIR FLOW AROUND FINS TO  
INSURE PROPER PERFORMANCE

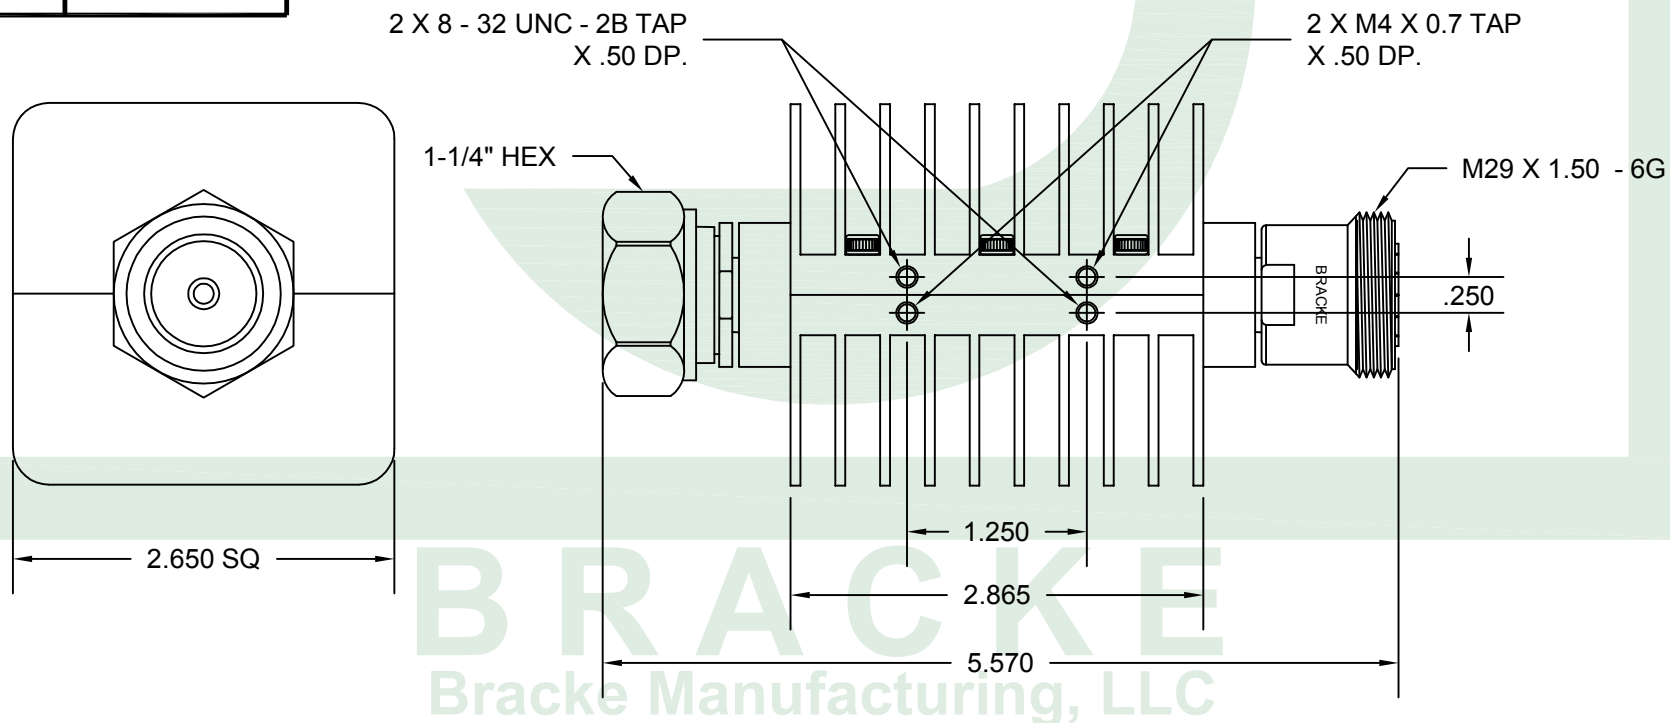

**Bracke Manufacturing, LLC**  
PO Box 12319  
Newport Beach, Ca 92658  
Phone (949)756-1600 / Fax (949) 756-1601  
sales@brackemfg.com / www.brackemfg.com

Part Number	
<b>BM10085.30</b>	
Produced By	Checked By
002	013

**Description**  
**7/16 DIN Male to Female, 30 dB**  
**50 Ohm [Attenuator, Max VSWR 1.45:1 @ 7.5 GHz]**

**Notes**

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2015 Bracke Manufacturing, LLC

CAGE / NAGE	
6L0W2	
Scale	Unit
3/4:1	Inches
Date	Revision
12/16/2015	A-01