


CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELDS TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHMS
BODY	BRASS GOLD PLATED	JACKET	.110" Ø POLYVINYL CHLORIDE	NOMINAL CAPACITANCE	30.8 PF/FOOT	BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED	DIELECTRIC	.060" Ø PE	MAX OPERATING VOLTAGE	2,000 VOLTS RMS	CONTACT	GOLD PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.018" Ø BARE COPPER COVERED STEEL	OPERATING TEMPERATURE	-40°C TO +85°C	INSULATOR	PTFE

BM60217

BM61349

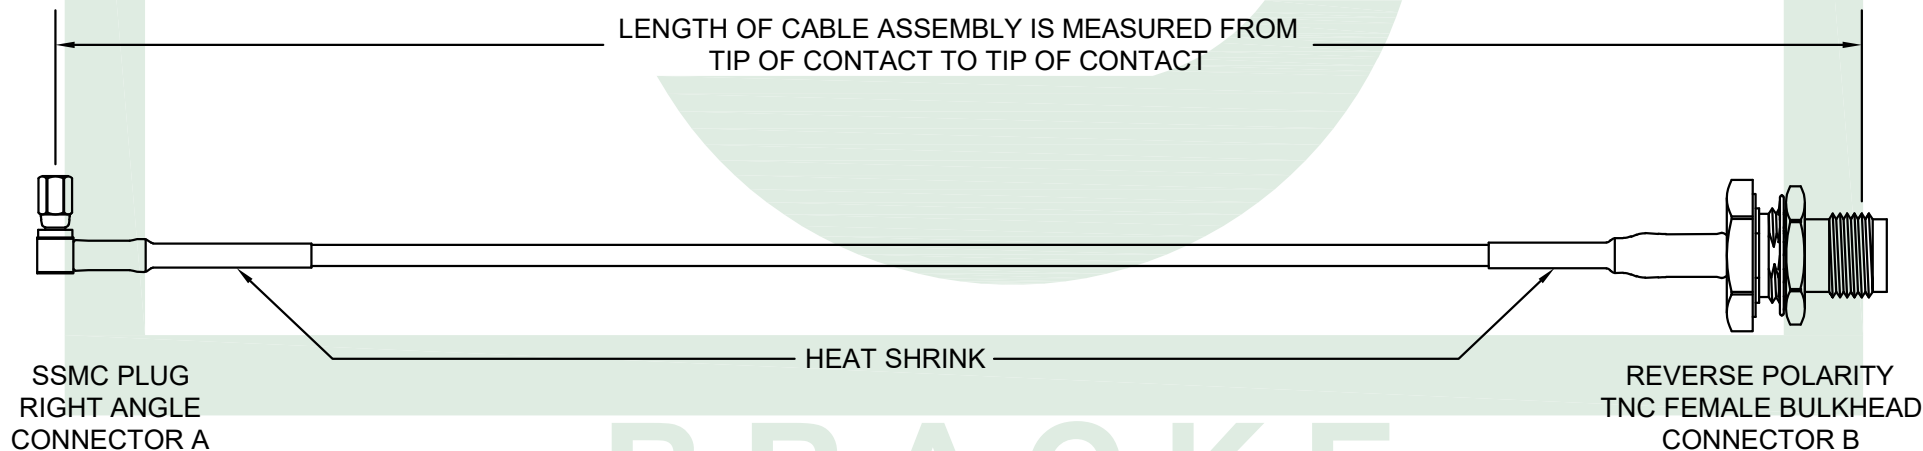

BRACKE

Bracke Manufacturing, LLC

LMR® is a registered trademark of Times Microwave Systems



Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number	
BM93582.**	
Produced By	Checked By
002	014

Description
SSMC Plug Right Angle to Reverse Polarity TNC Female Bulkhead Cable Assembly using LMR®100A Cable
Notes
- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. - The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. - Standard cable length tolerance is 1.5% or 3/8 inches, whichever is greater. - Replace ** with ANY length in inches.

©2026 Bracke Manufacturing, LLC

CAGE / NAGE	
6L0W2	
Scale	Unit
1.5:1	Inches
Date	Revision
4/30/2026	A-01