
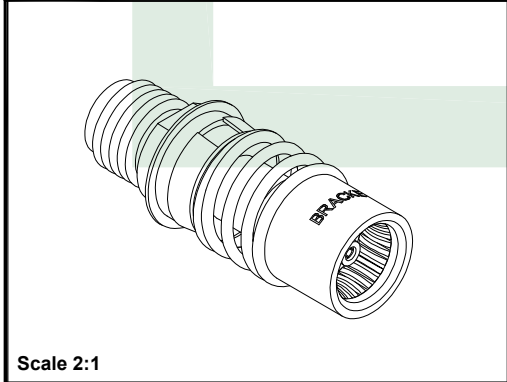



MATERIALS	
BODY	PASSIVATED STAINLESS STEEL
SPRING	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	18 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR MAX	1.15:1
INSERTION LOSS MAX	.06 $\sqrt{\text{Freq. GHz}}$
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	335 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION D
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

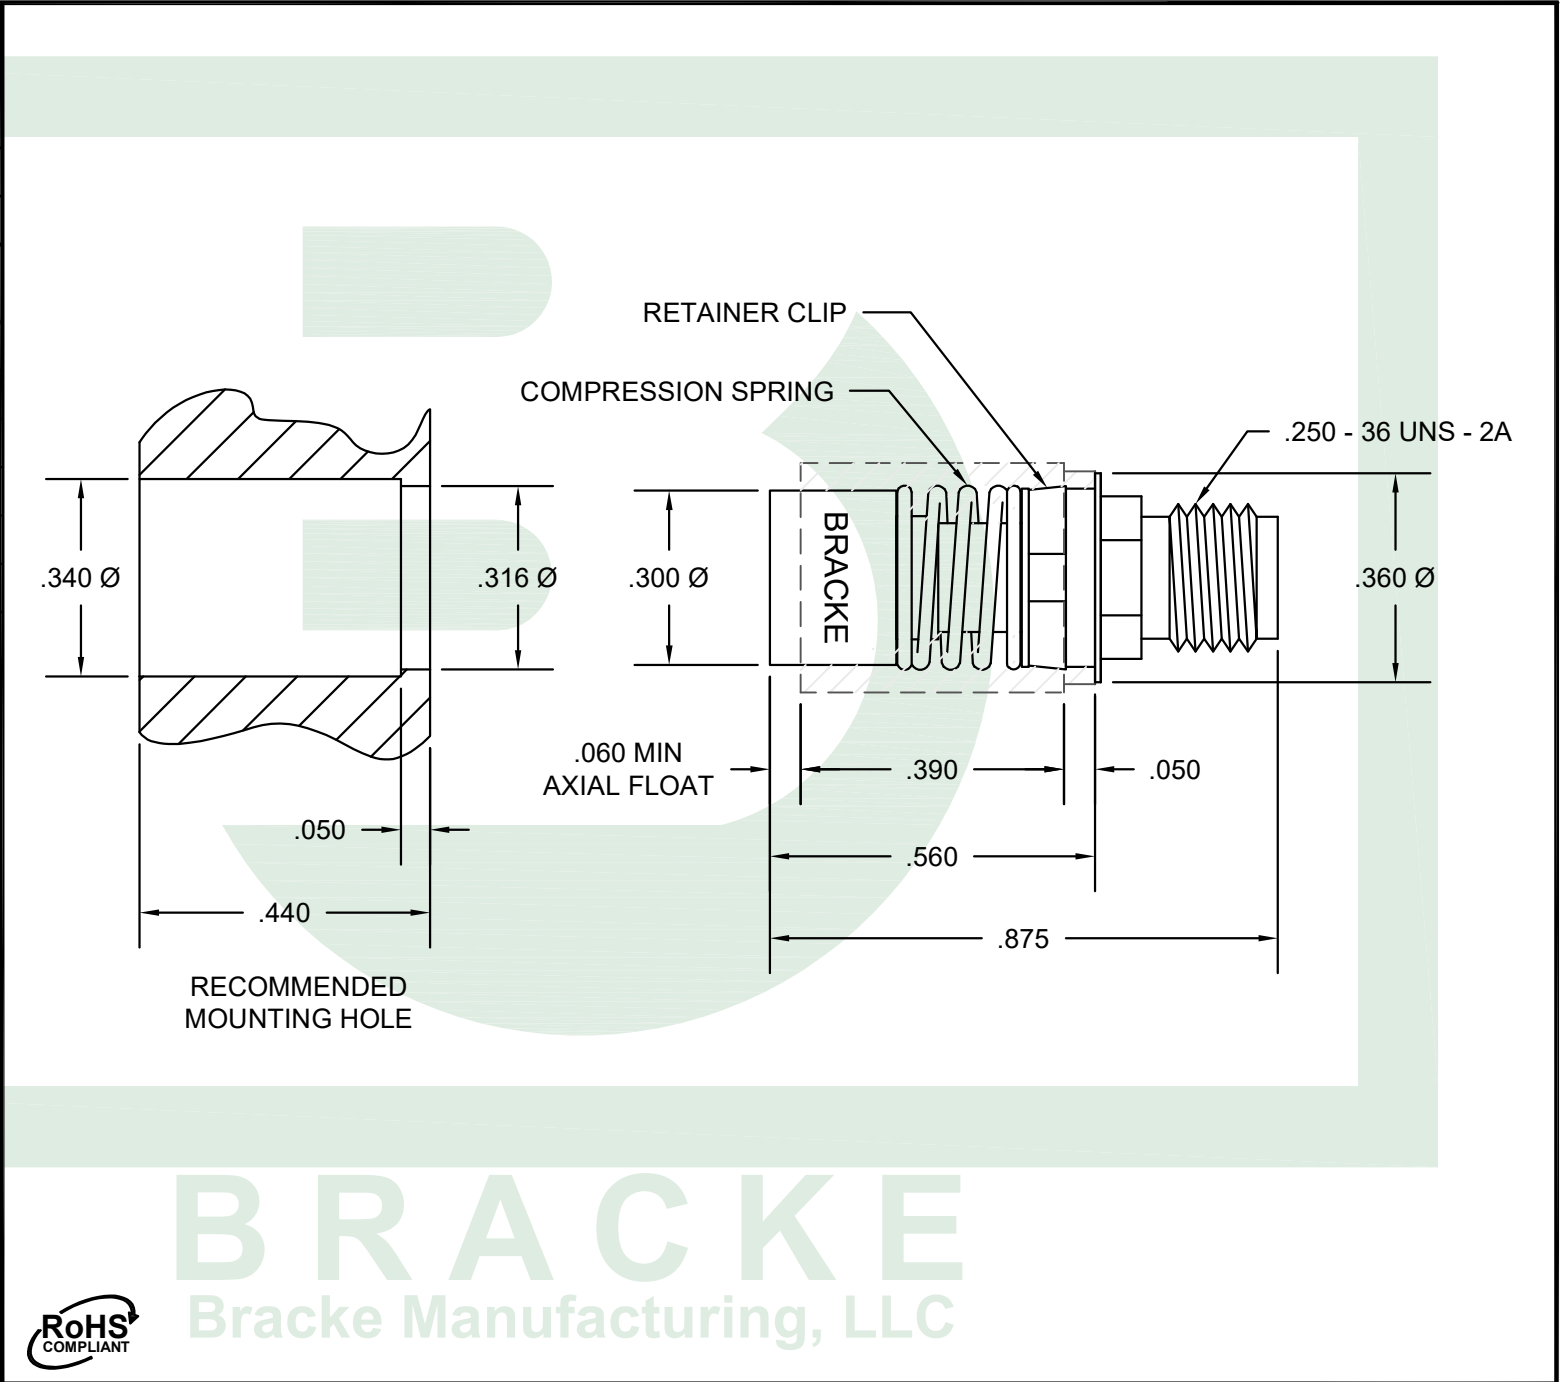

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE		
	BM51209		BMA Jack Jack Floating Panel Mount to SMA Female [Precision Adapter]		6LOW2		
					Scale	Unit	
	Produced By		Checked By		Inches		
	002		014		3:1		
					Inches		
				Date		Revision	
				Notes		6/07/2024	
				• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.		A-01	
				• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.			
				©2023 Bracke Manufacturing, LLC			