



MATERIALS		
HOUSING		PLASTIC
INNER CONNECTOR		BRASS NICKEL PLATED
CONTACT		GOLD PLATED
INSULATOR		PTFE
HARDWARE		
		
FERRULE	CAP	INSULATOR
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS		
IMPEDANCE		50 OHMS
INSULATION RESISTANCE		1000 MΩ
OPERATING FREQUENCY		4 GHz
DIELECTRIC WITHSTANDING VOLTAGE		1000 Vrms
VSWR TYPICAL		1.30:1
INSERTION LOSS TYPICAL		.06 $\sqrt{\text{Freq. GHz}}$
OPERATING TEMPERATURE		-40 to +105 C°
VOLTAGE RATING		335 VOLTS
INTERFACE		USCAR-18, DIN
VIBRATION		MIL-STD-202 METHOD 204, CONDITION A
CORROSION		MIL-STD-202 METHOD 101, CONDITION B





Scale 1.5:1

FAKRA CONNECTOR
CODE K



BRACKE
Bracke Manufacturing, LLC

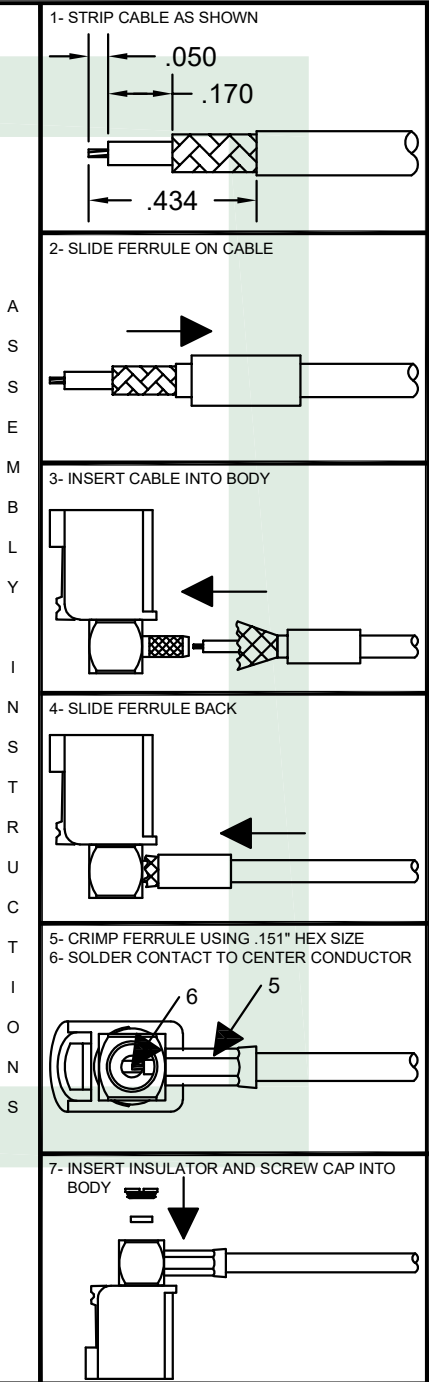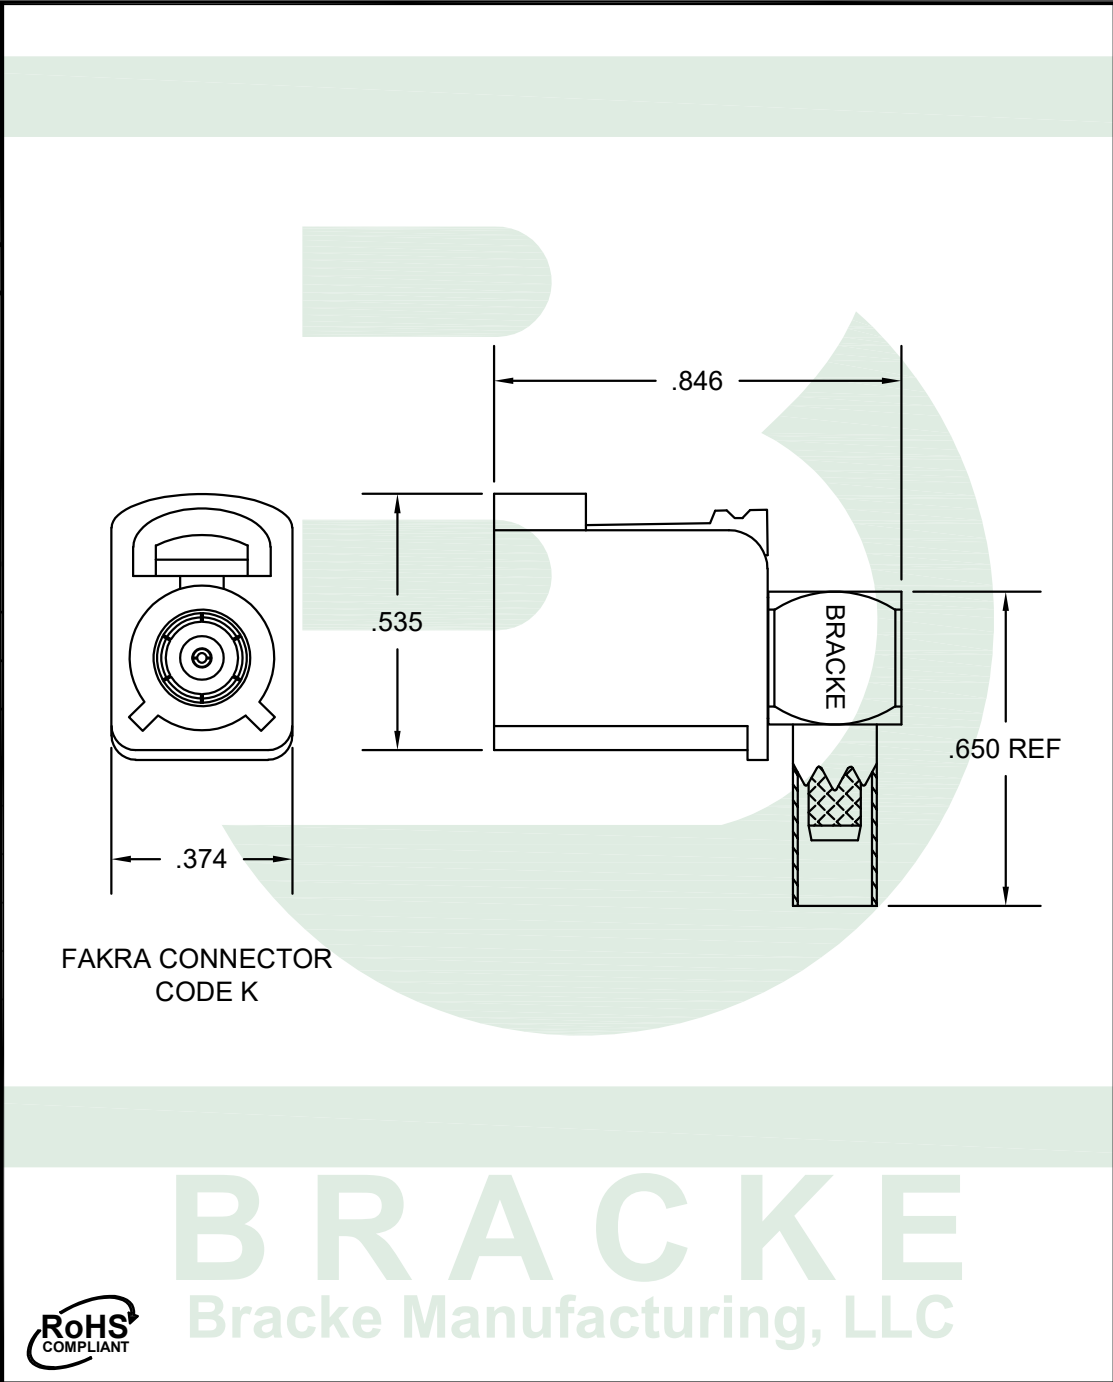

	Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com		Part Number BM61764		Description Fakra Jack Right Angle - Color Code K Curry Crimp Connector [RG188-Double, RG316-Double]		CAGE / NAGE 6LOW2	
	Produced By 002		Checked By 014		Notes - Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. - The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.		Scale 2.5:1	Unit Inches
					Date 8/02/2024		Revision A-01	

©2024 Bracke Manufacturing, LLC