





MATERIALS	
BODY	BRASS NICKEL PLATED
FERRULE	GOLD PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE

HARDWARE	
	
CAP	FERRULE
	
HEAT-SHRINK	










ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	12.4 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.60:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

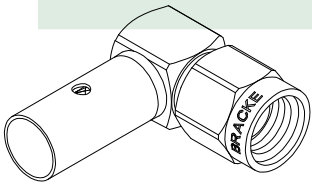


Scale 1.5:1



BRACKE
Bracke Manufacturing, LLC

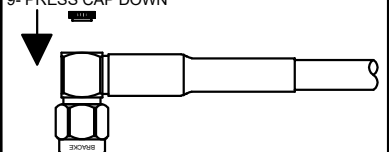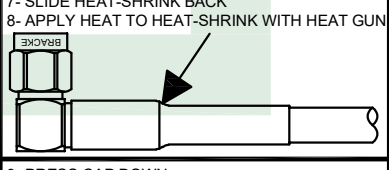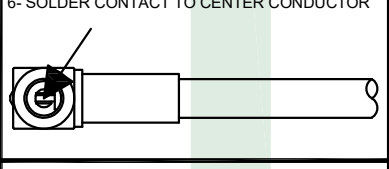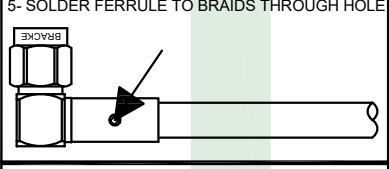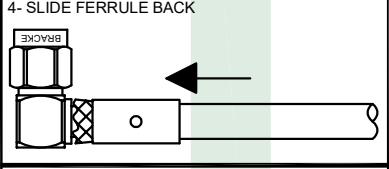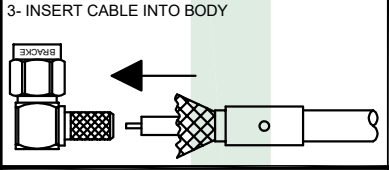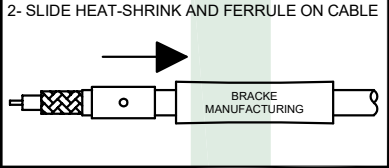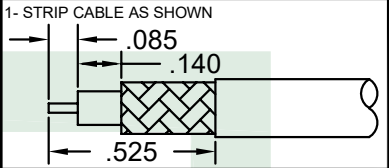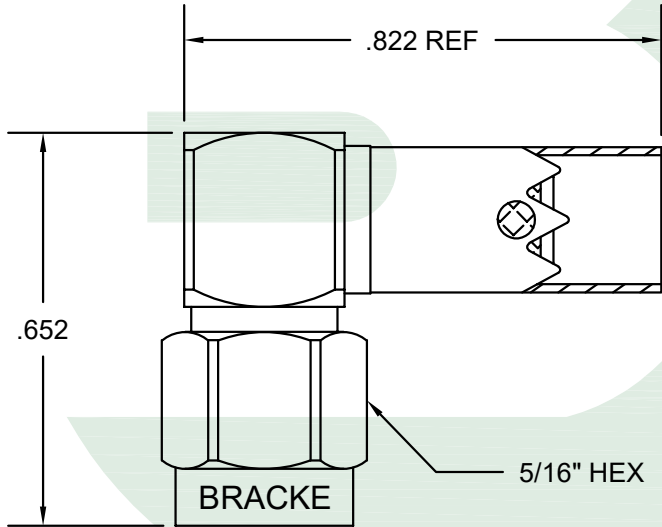

 BRACKE	Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE			
		BM60669		Reverse Polarity SMA Male Right Angle Solder Connector [RG55, RG58, RG141, RG142, RG223, RG400]		6LOW2			
						Scale	Unit		
		Produced By		Checked By		3:1		Inches	
		002		007		Notes		Date	Revision
						• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2023 Bracke Manufacturing, LLC		8/30/2023	A-01