

MATERIALS				
BODY		PASSIVATED STAINLESS STEEL		
CONTACT		GOLD PLATED		
INSULATOR		PTFE		
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS				

IMPEDANCE	50 OHMS	
INSULATION RESISTANCE	5,000 ΜΩ	
OPERATING FREQUENCY	18 GHz	
DIELECTRIC WITHSTANDING VOLTAGE	1,000 Vrms	
VSWR MAX	1.40:1	
INSERTION LOSS MAX	.05 √ Freq. GHz	
	1 GHz	200 WATTS
AVERAGE POWER	15 GHz	40 WATTS
	18 GHz	30 WATTS
PEAK POWER	3,000 WATTS	
OPERATING TEMPERATURE	-65 to +165 C°	
VOLTAGE RATING	500 VOLTS	
INTERFACE	MIL-STD-348	
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A	



Scale 1.5:1

BRACKE

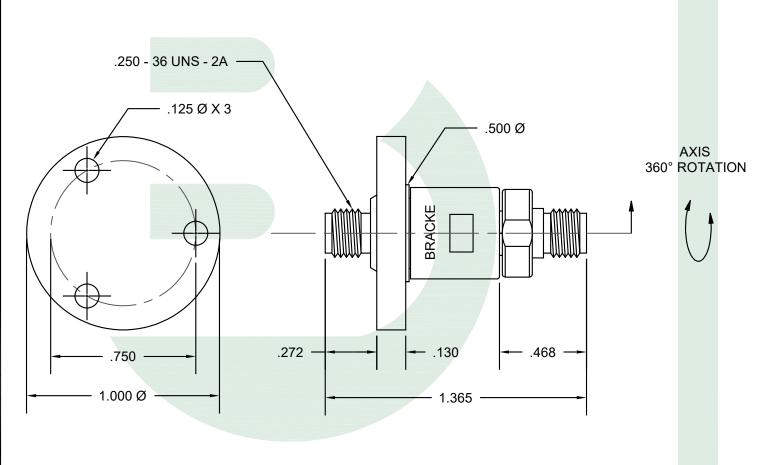

Bracke Manufacturing, LLC



PO Box 12319

Newport Beach, Ca 92658

Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com

Part Number	
BM5	0929
Produced By	Checked By

014

002

ROHS

Description SMA Female to SMA Female Panel Mount, Rotary Joint [Precision Adapter]

6L0W2				
Scale	Unit			
2:1	Inches			
Date	Revision			
24.0	1101101011			

CAGE / NAGE

Notes
Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or
reproduced in any manner without Bracke's prior written consent. ©2024 Bracke Manufacturing, LLC