


M A T E R I A L S	HOUSING	ALUMINUM
	SMA CONNECTORS	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L O C T E R I T I C I A L S	FREQUENCY RANGE (GHz)	5 - 11
	VSWR (MAX)	1.40:1
	INSERTION LOSS (dB MAX)	0.80
	ISOLATION (dB MIN)	15
	AVERAGE POWER (WATT)	1
	OPERATING TEMP (°C)	-10°C to +60°C

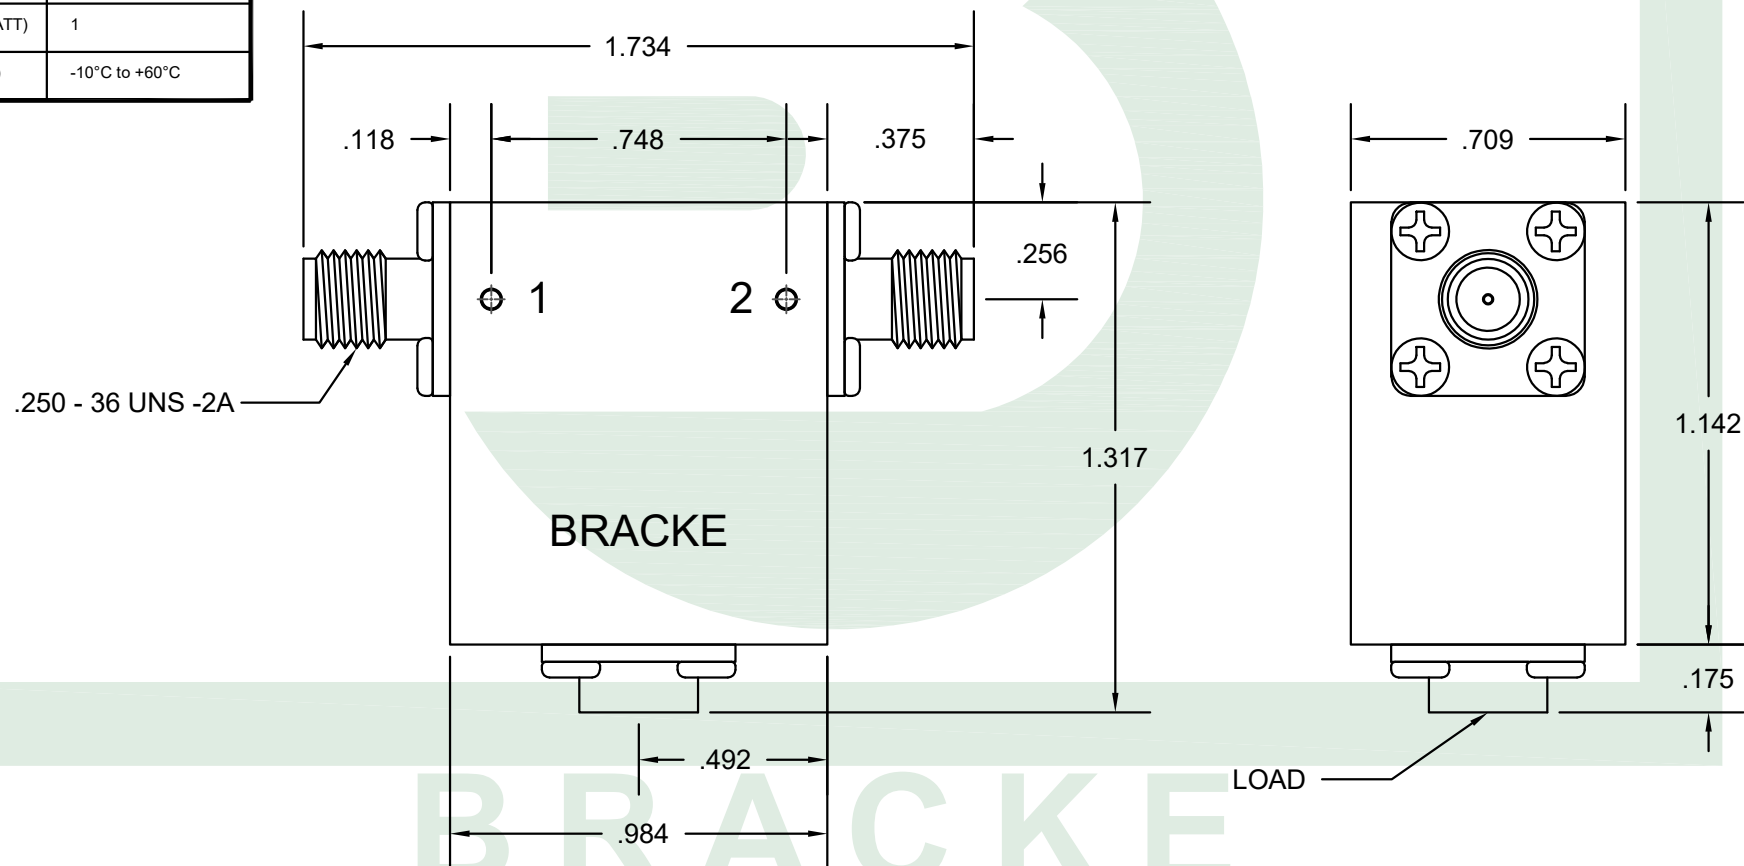

**Bracke Manufacturing, LLC**  
 PO Box 12319  
 Newport Beach, Ca 92658  
 Phone (949)756-1600 / Fax (949) 756-1601  
 sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE	
BM13327			6LOW2	
			Scale	Units
			2:1	Inches
Produced By	Checked By	Notes	Date	Revision
012	013	<ul style="list-style-type: none"><li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li></ul> <div>©2020 Bracke Manufacturing, LLC</div>	5/01/2014	A-01