



MATERIALS


BNC CONNECTORS	BRASS NICKEL PLATED
CONTACTS	SILVER PLATED
INSULATORS	PTFE

ELECTRICALS

IMPEDANCE (OHM)	50
FREQUENCY RANGE (MHz)	DC - 750
VSWR (MAX)	1.40:1
INPUT POWER (WATTS)	1
PEAK POWER (WATTS)	1000
ATTENUATION RANGE (dB)	0 - 45.5 dB in .5 dB STEPS
ATTENUATION STEPS (dB)	.5, 1, 2, 4, 8, 10 and 20
ACCURACY (dB)	+/- .75
INSERTION LOSS (dB MAX)	1.50
OPERATING TEMP. RANGE (°C)	-20 to +85

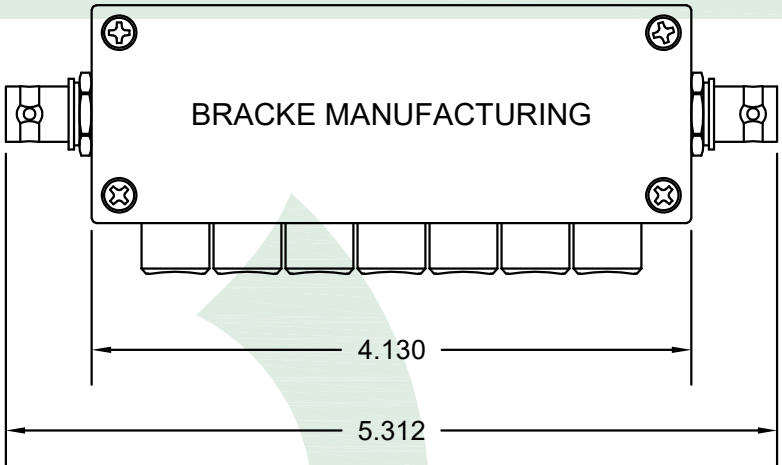


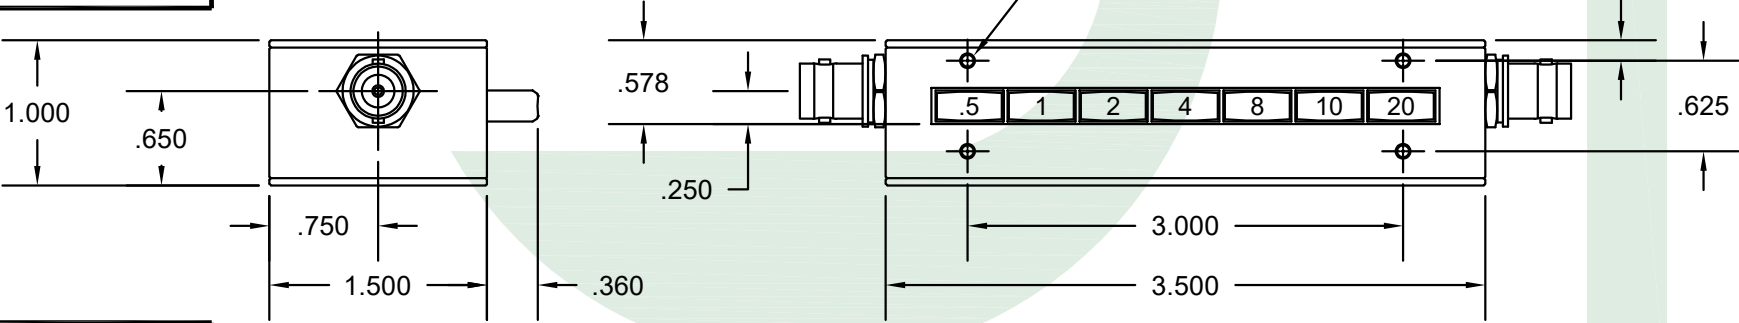

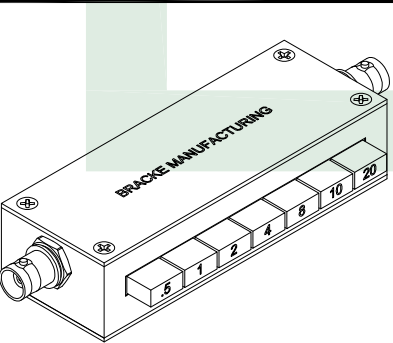



RECOMMENDED MOUNTING HOLES

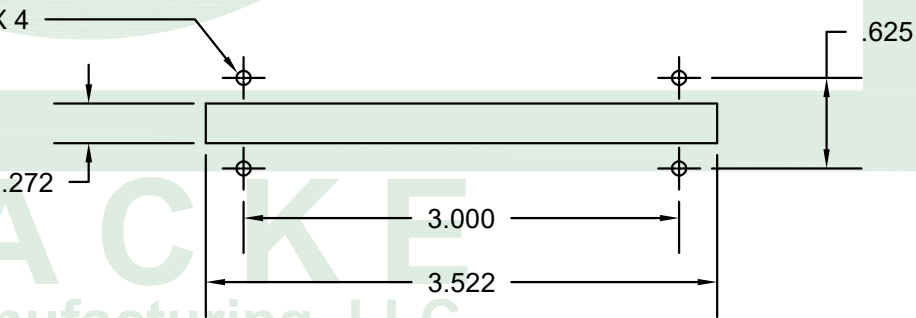



Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number	
BM10041	
Produced By	Checked By
002	014

Description

BNC Female
50 Ohm [Pushbutton Attenuator, Max VSWR 1.40:1 @ 750 MHz]

Notes

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2024 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Unit
3/4:1	Inches
Date	Revision
1/05/2024	A-01