
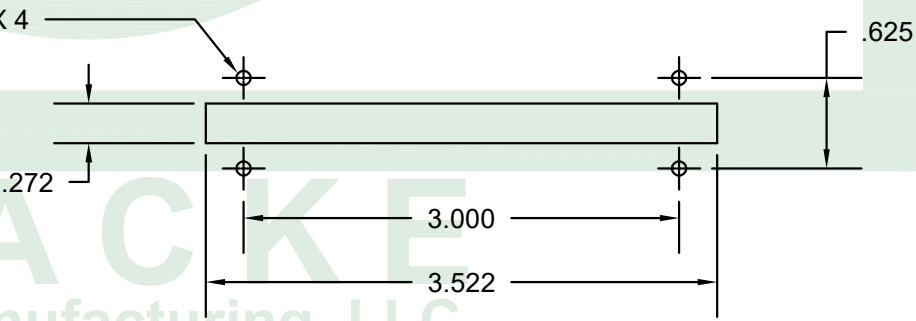
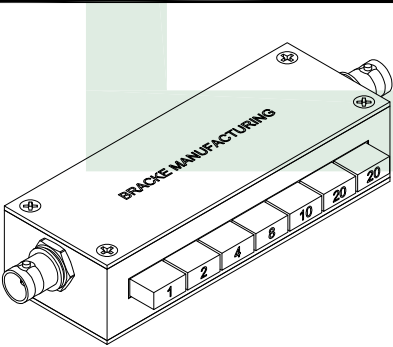
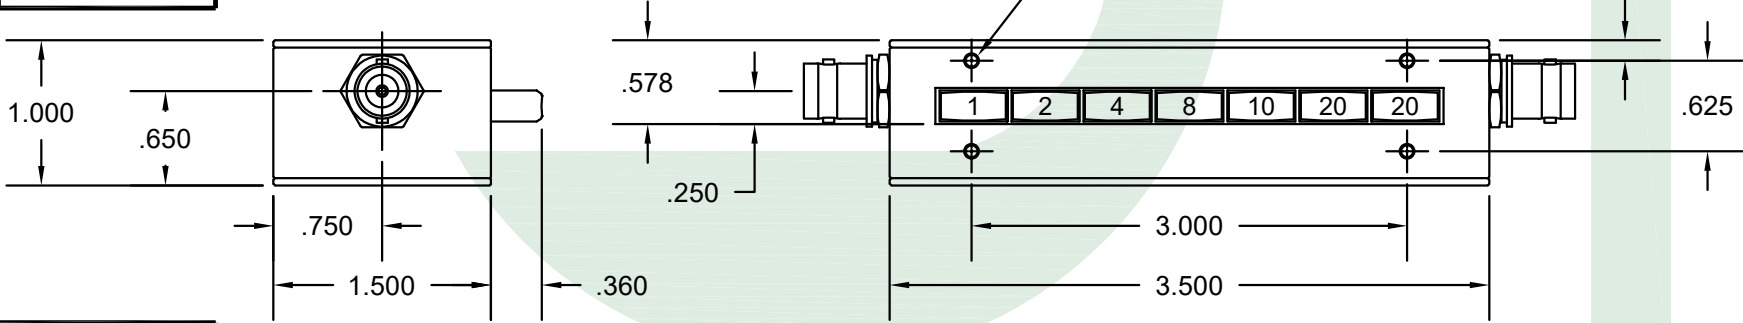


MATERIALS

BNC CONNECTORS	BRASS NICKEL PLATED
CONTACTS	GOLD PLATED
INSULATORS	PTFE

ELECTRICALS

IMPEDANCE (OHM)	75
FREQUENCY RANGE (MHz)	DC - 500
VSWR (MAX)	1.30:1
INPUT POWER (WATTS)	1
PEAK POWER (WATTS)	1000
ATTENUATION RANGE (dB)	0 - 65 dB in 1 dB STEPS
ATTENUATION STEPS (dB)	1, 2, 4, 8, 10, 20 and 20
ACCURACY (dB)	+/- .8
INSERTION LOSS (dB MAX)	1.20
OPERATING TEMP. RANGE (°C)	-20 to +85

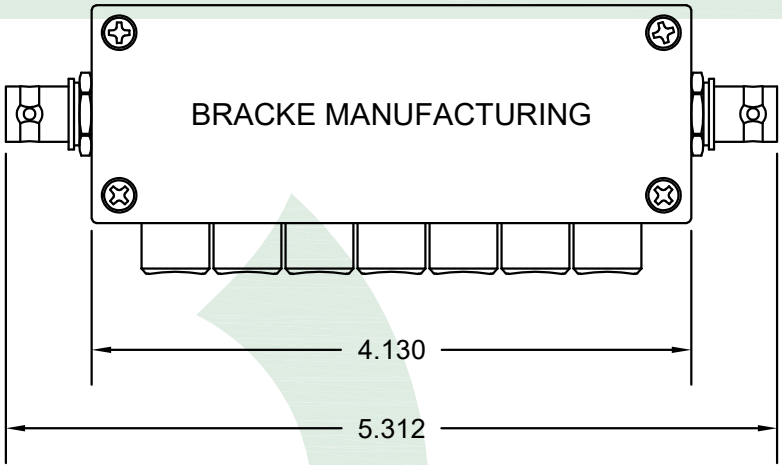



Scale 1/2:1



Bracke Manufacturing, LLC

PO Box 12319

Newport Beach, Ca 92658

Phone (949)756-1600 / Fax (949) 756-1601

sales@brackemfg.com / www.brackemfg.com

Part Number	
BM10044	
Produced By	Checked By
002	014

Description

BNC Female

75 Ohm [Pushbutton Attenuator, Max VSWR 1.30:1 @ 500 MHz]

Notes

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2024 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Unit
3/8:1	Inches
Date	Revision
1/05/2024	A-01