


| | | |
|--|----------------------------------|---------------------|
| M A T E R I A L S | BNC CONNECTORS | BRASS NICKEL PLATED |
| | CONTACTS | SILVER PLATED |
| | INSULATORS | PTFE |
| | | |
| E P L O C T R O N I C A L S | RF INPUT CONNECTOR | BNC MALE |
| | RF OUTPUT CONNECTOR | BNC FEMALE |
| | IMPEDANCE (OHM) | 50 |
| | FREQUENCY RANGE | 100 KHz - 2.5 GHz |
| | VSWR (MAX) | 1.50:1 |
| | INPUT POWER (dBm) | +20 |
| | VIDEO CAPACITANCE (pF) | 1000 |
| | DC OUTPUT POLARITY | POSITIVE |
| | TANGENTIAL SENSITIVITY (dBm MIN) | -40 |
| | OPERATING TEMP. RANGE (°C) | -20 to +85 |



BRACKE
Bracke Manufacturing, LLC

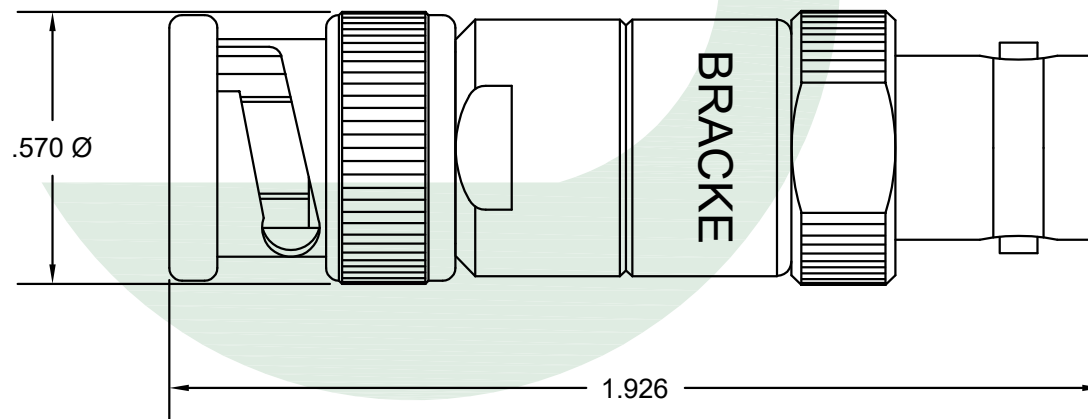

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

| Part Number | | Description | CAGE / NAGE | |
|-------------|------------|---|-------------|----------|
| BM13500 | | | 6LOW2 | |
| | | Scale | Unit | |
| Produced By | Checked By | Notes | 2.5:1 | Inches |
| 002 | 013 | | Date | Revision |
| | | <ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2014 Bracke Manufacturing, LLC</div> | 05/12/2014 | A-01 |