





CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHMS	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELDS SILVER PLATED COPPER	IMPEDANCE	50 OHMS
BODY	BRASS NICKEL PLATED	JACKET	.211" Ø POLYVINYL CHLORIDE NON-CONTAMINATING	NOMINAL CAPACITANCE	30.8 PF/FOOT	BODY	BRASS NICKEL PLATED/POLYETHYLENE
CONTACT	GOLD PLATED	DIELECTRIC	.116" Ø PE	MAX OPERATING VOLTAGE	1,900 VOLTS RMS	CONTACT	GOLD PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.035" Ø SILVER PLATED COPPER	OPERATING TEMPERATURE	-40°C TO +80°C	INSULATOR	POLYFORMALDEHYDE

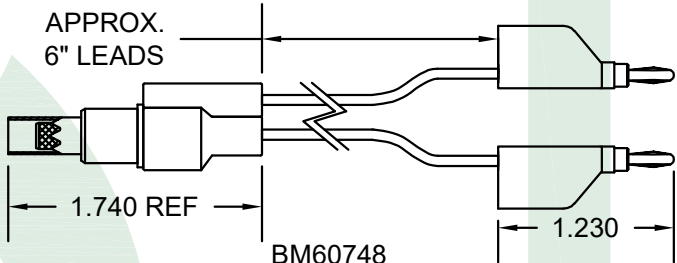


BM60053

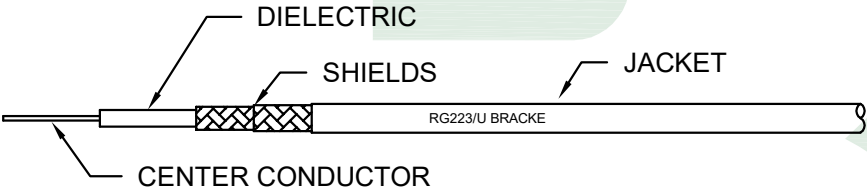

BM60748

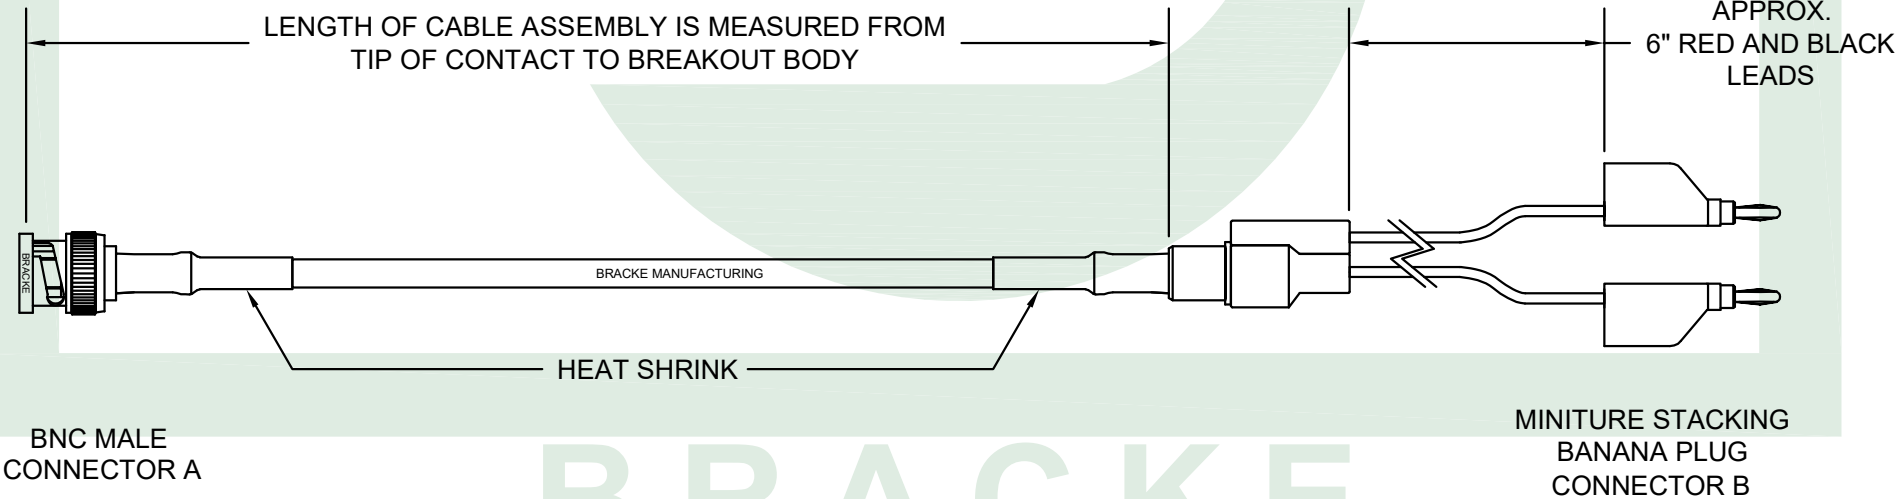

BRACKE  
Bracke Manufacturing, LLC

 <div><b>Bracke Manufacturing, LLC</b> PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com</div>	Part Number		Description		CAGE / NAGE	
	<b>BM90762.**</b>		<b>BNC Male to Miniature Stacking Banana Plug With 6" Red &amp; Black Leads, RG223/U [Cable Assemblies]</b>		6L0W2	
	Produced By	Checked By	<b>Notes</b> <ul style="list-style-type: none"><li>• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.</li><li>• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.</li><li>• Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater</li><li>• Replace ** with ANY length in Inches</li></ul>		Scale	Unit
	002	014			3/4:1	Inches
			©2023 Bracke Manufacturing, LLC		Date	Revision
					12/14/2023	A-01