



| | | |
|---|----------------------------|-------------------------------|
| M A T E R I A L S | HOUSING | ALUMINUM |
| | N CONNECTORS | PASSIVATED STAINLESS STEEL |
| | CONTACTS | GOLD PLATED |
| | INSULATOR | PTFE |
| E P L R O P T E R I T I C I A L S | RF CONNECTORS | N FEMALE |
| | BIAS CONNECTORS | SOLDER LUG & PIN |
| | FREQUENCY RANGE | .01-6 GHz |
| | VSWR (MAX) | 1.50:1 |
| | INSERTION LOSS (dB MAX) | 1.25 |
| | ISOLATION (dB TYP) | 30 |
| | VOLTAGE (VDC MAX) | 100 |
| | CURRENT (MAX) | 2.5 Amps |
| | RF POWER (WATTS MAX) | 5 |

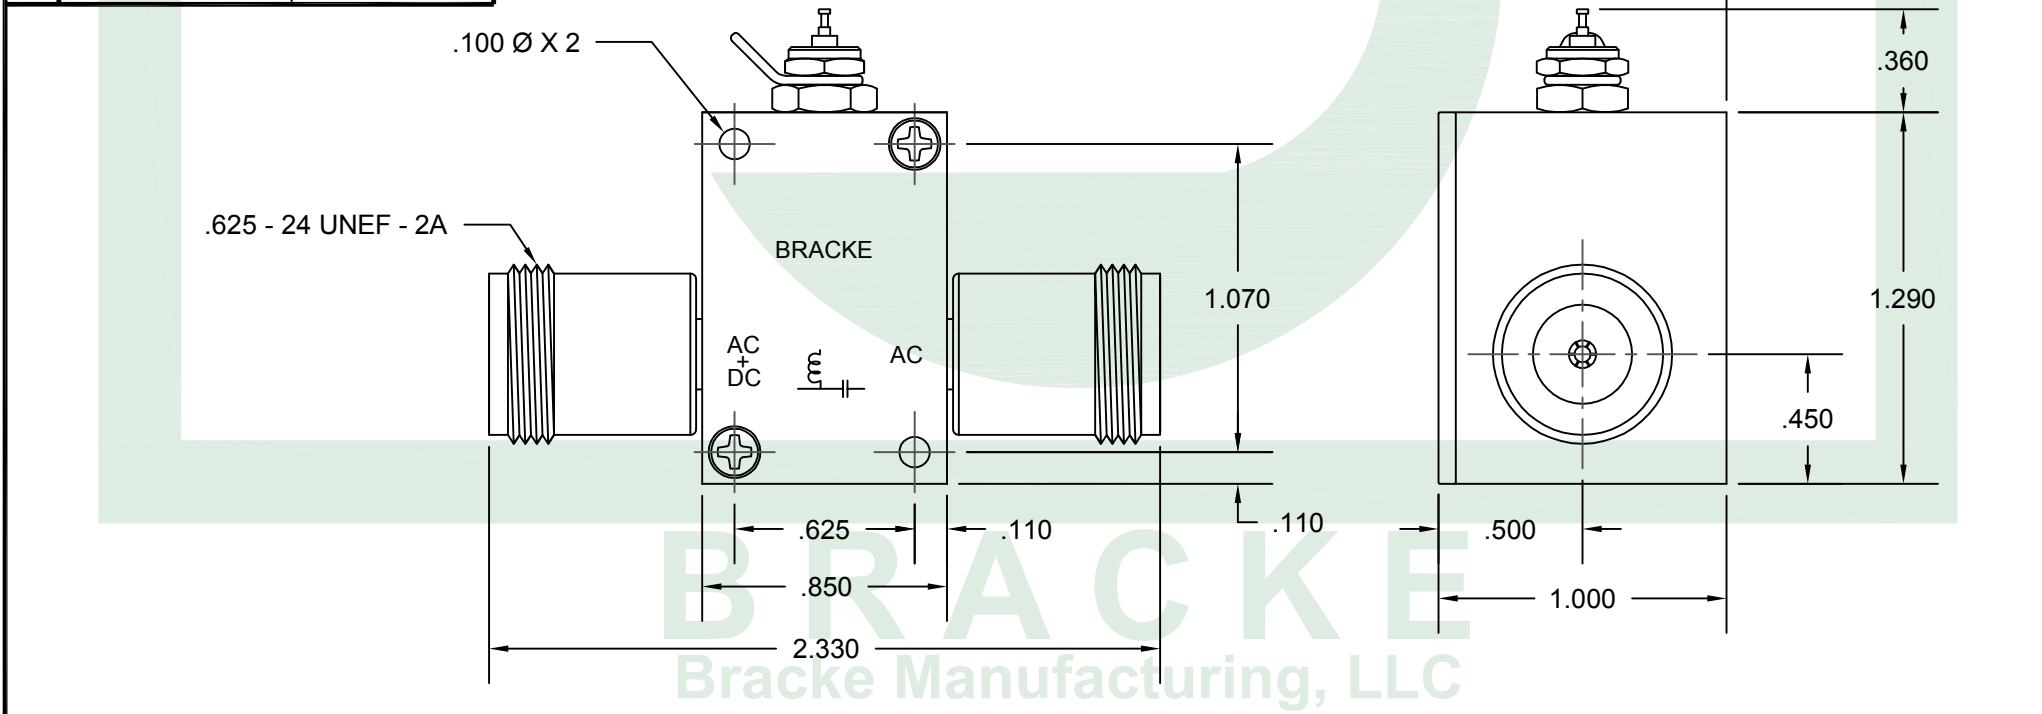

| | | | | | |
|--|----------------|------------|--|-------------|----------|
|  Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com | Part Number | | Description N Female Solder Lug & Pin Frequency Range .01-6 GHz [Bias Tee] Notes <ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. <div>©2015 Bracke Manufacturing, LLC</div> | CAGE / NAGE | |
| | BM13215 | | | 6LOW2 | |
| | Produced By | Checked By | | Scale | Units |
| | 002 | 013 | | 1.5:1 | Inches |
| | | | | Date | Revision |
| | | 10/22/2015 | A-01 | | |