


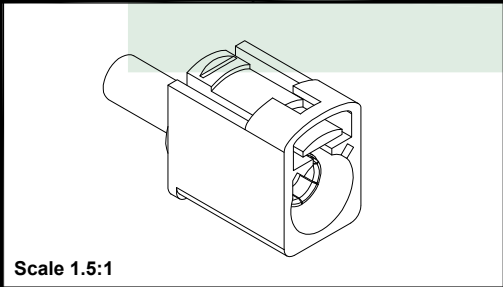


MATERIALS	
HOUSING	PLASTIC
INNER CONNECTOR	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
HARDWARE	
	
FERRULE	CONTACT
ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS	
IMPEDANCE	50 OHMS
INSULATION RESISTANCE	1000 MQ
OPERATING FREQUENCY	4 GHz
DIELECTRIC WITHSTANDING VOLTAGE	1000 Vrms
VSWR TYPICAL	1.30:1
INSERTION LOSS TYPICAL	.06 $\sqrt{\text{Freq. GHz}}$
OPERATING TEMPERATURE	-40 to +105 C°
VOLTAGE RATING	335 VOLTS
INTERFACE	USCAR-18, DIN
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

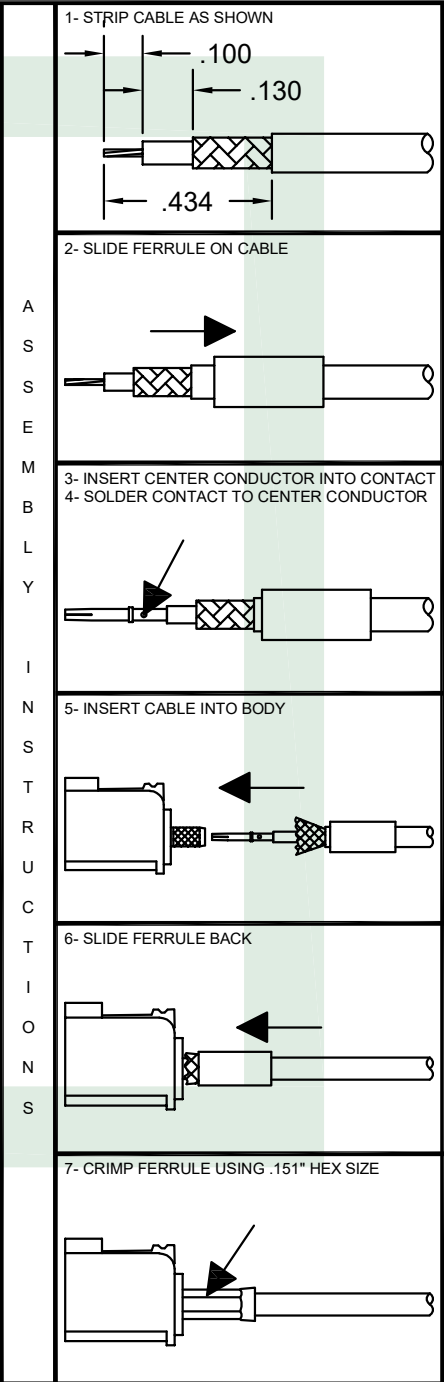

Scale 1.5:1

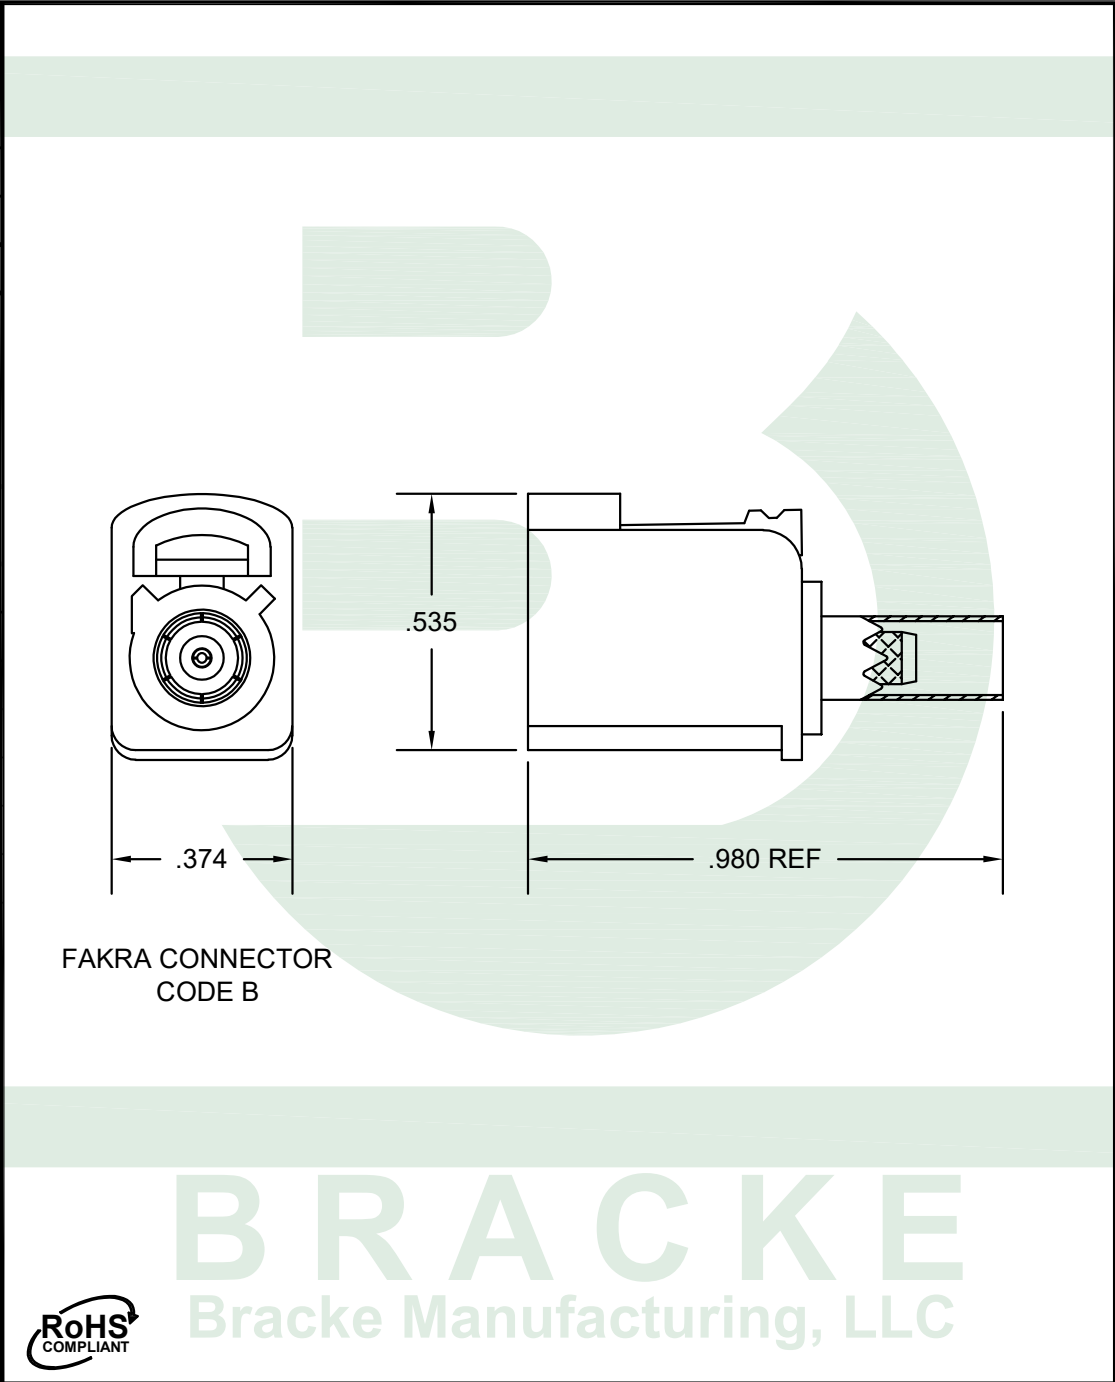

BRACKE
Bracke Manufacturing, LLC

	Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com		Part Number BM61751		Description Fakra Jack - Color Code B Cream Crimp Connector [RG188-Double, RG316-Double]		CAGE / NAGE 6LOW2	
	Produced By 002		Checked By 014		Notes - Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. - The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.		Scale 2.5:1	Unit Inches
							Date 8/02/2024	Revision A-01

©2024 Bracke Manufacturing, LLC