


M A T E R I A L S	HOUSING	ALUMINUM
	SMA CONNECTORS	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L O C P T E R R I T I C A E L S	RF CONNECTORS	SMA FEMALE
	BIAS CONNECTORS	SOLDER LUG & PIN
	FREQUENCY RANGE (GHz)	.01 - 2.5
	VSWR (MAX)	1.50:1
	INSERTION LOSS (dB MAX)	1.00
	ISOLATION (dB TYP)	30
	VOLTAGE (VDC MAX)	100
	CURRENT (MAX)	2.5 Amps
	RF POWER (WATTS MAX)	5

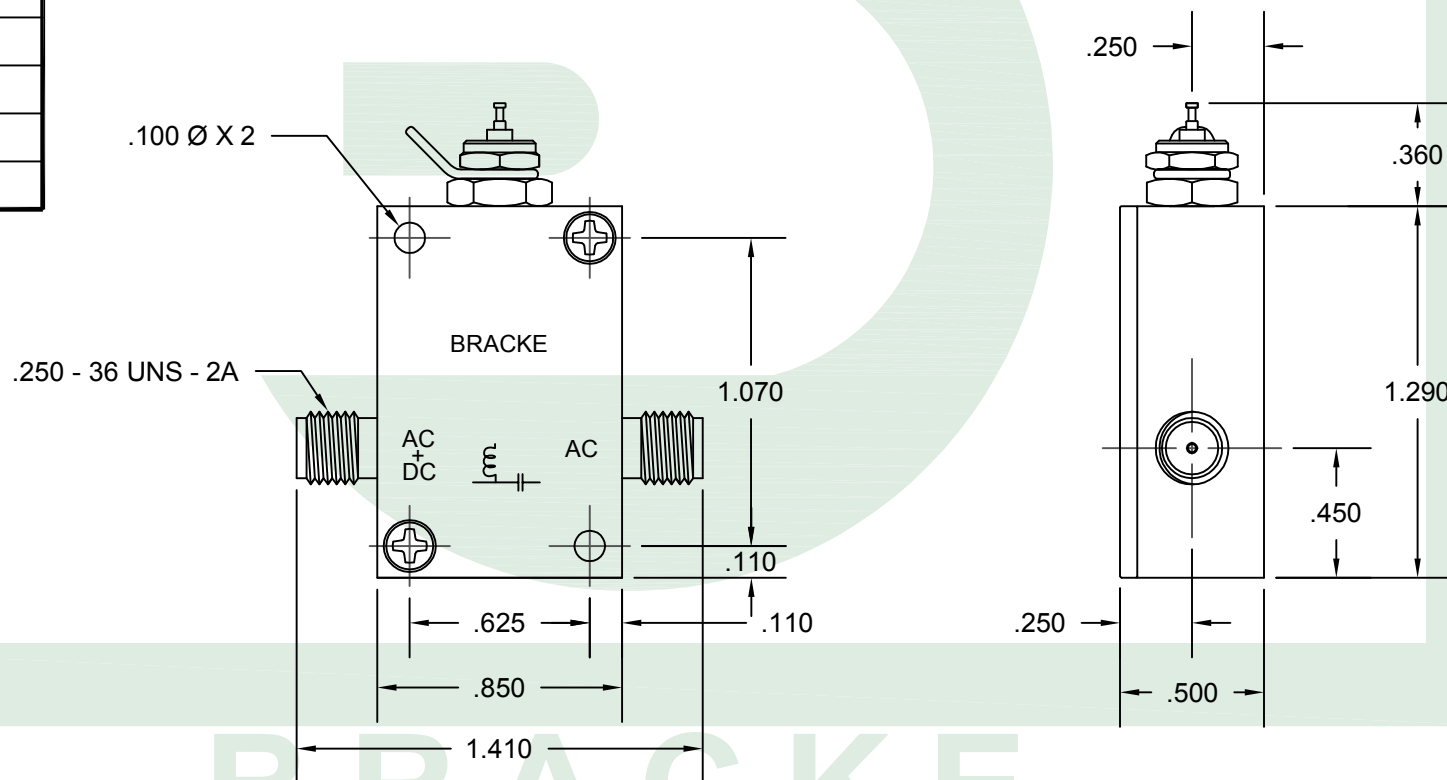

Bracke Manufacturing, LLC
 PO Box 12319
 Newport Beach, Ca 92658
 Phone (949) 756-1600 / Fax (949) 756-1601
 sales@brackemfg.com / www.brackemfg.com

Part Number	
BM13210	
Produced By	Checked By
002	013

Description
SMA Female Solder Lug & Pin
 Frequency Range .01-2.5 GHz [Bias Tee]

Notes
 • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
 • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.
 ©2015 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Units
1.5:1	Inches
Date	Revision
10/22/2015	A-01