
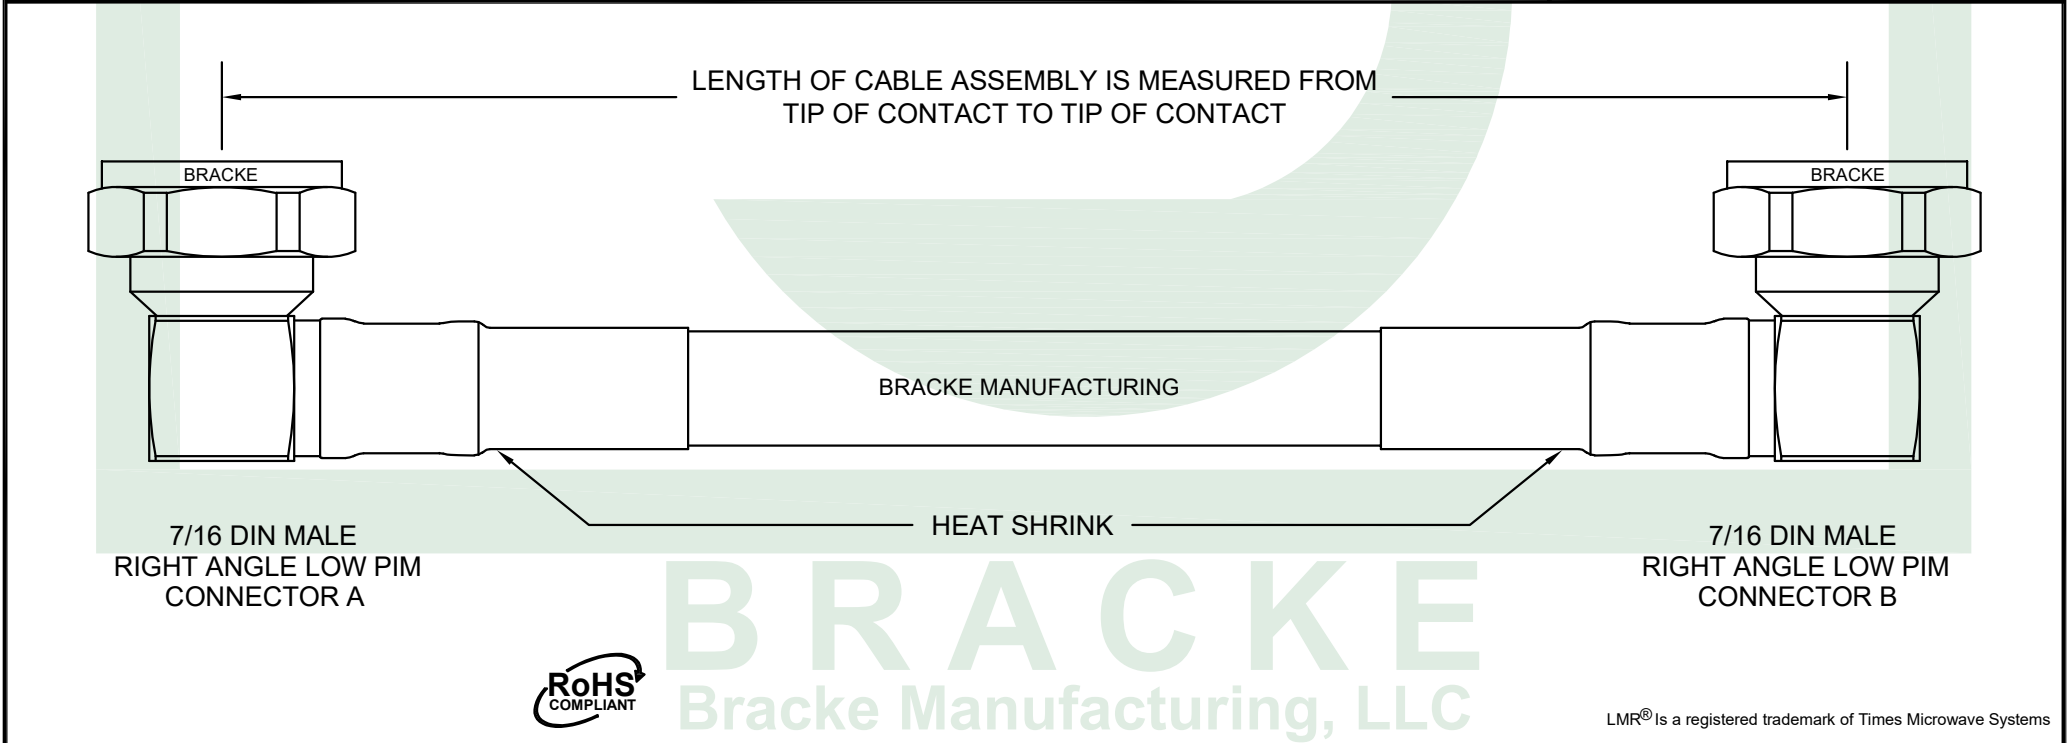



CONNECTOR A		CABLE CHARACTERISTICS				CONNECTOR B	
IMPEDANCE	50 OHM	IMPEDANCE	50 OHMS	SHIELDS	2 SHIELD TINNED COPPER / ALUMINUM TAPE	IMPEDANCE	50 OHM
BODY	BRASS TRI-METAL PLATED	JACKET	.590" Ø POLYETHYLENE	NOMINAL CAPACITANCE	23.4 PF/FOOT	BODY	BRASS TRI-METAL PLATED
CONTACT	SILVER PLATED	DIELECTRIC	.455" Ø FPE	MAX OPERATING VOLTAGE	8,000 VOLTS RMS	CONTACT	SILVER PLATED
INSULATOR	PTFE	CENTER CONDUCTOR	.176 Ø BARE COPPER COVERED ALUMINUM	OPERATING TEMPERATURE	-40°C TO +85°C	INSULATOR	PTFE

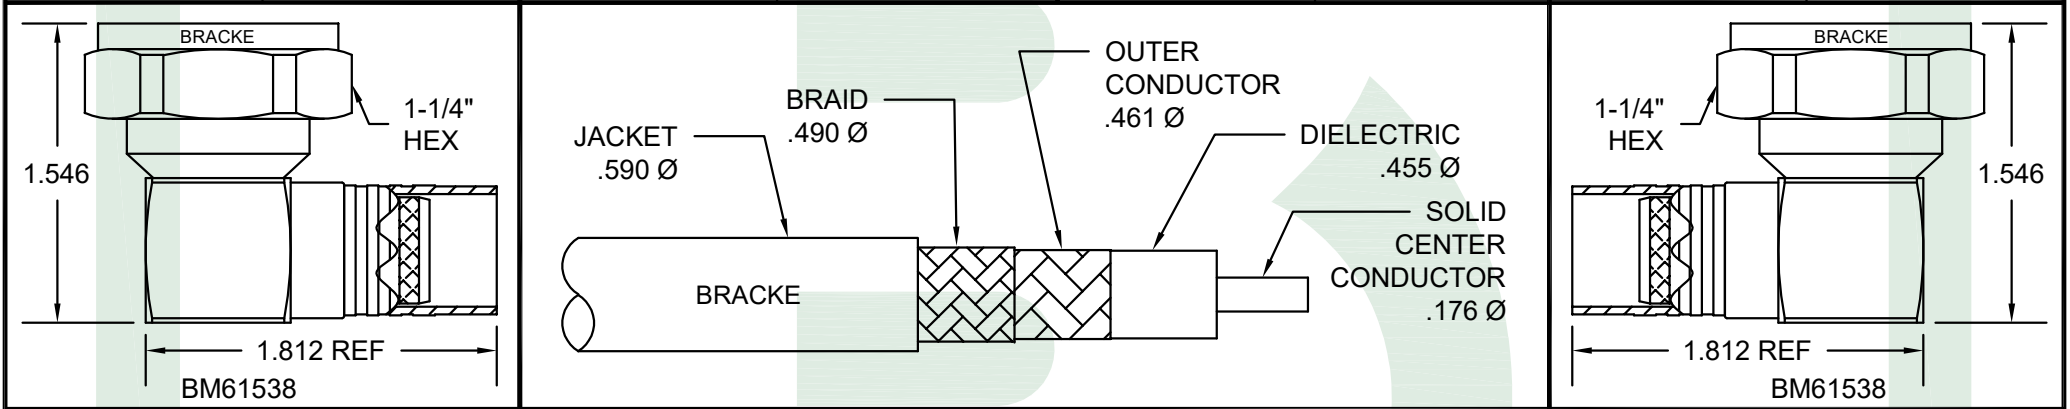

BRACKE
Bracke Manufacturing, LLC

LMR® is a registered trademark of Times Microwave Systems

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM92278.**		7/16 DIN Male Right Angle Low PIM to 7/16 DIN Male Right Angle Low PIM, Cable Assembly using LMR®-600 Cable		6LOW2	
	Produced By	Checked By	Notes • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. • Standard cable length tolerance is ± 1.5% or 3/8 inch, whichever is greater • Replace ** with ANY length in Inches		Scale	Unit
	002	013			1:1	Inches
					Date	Revision
			©2025 Bracke Manufacturing, LLC		06/23/2025	A-01