


M A T E R I A L S	HOUSING	ALUMINUM
	F CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E P L O C P T E R I T I C I A L S	RF CONNECTORS	F CONNECTORS
	BIAS CONNECTORS	SOLDER LUG & PIN
	FREQUENCY RANGE	.03-3 GHz
	VSWR (MAX)	1.80:1
	INSERTION LOSS (dB MAX)	1.50
	ISOLATION (dB TYP)	30
	VOLTAGE (VDC MAX)	100
	CURRENT (MAX)	2.5 Amps



BRACKE
Bracke Manufacturing, LLC

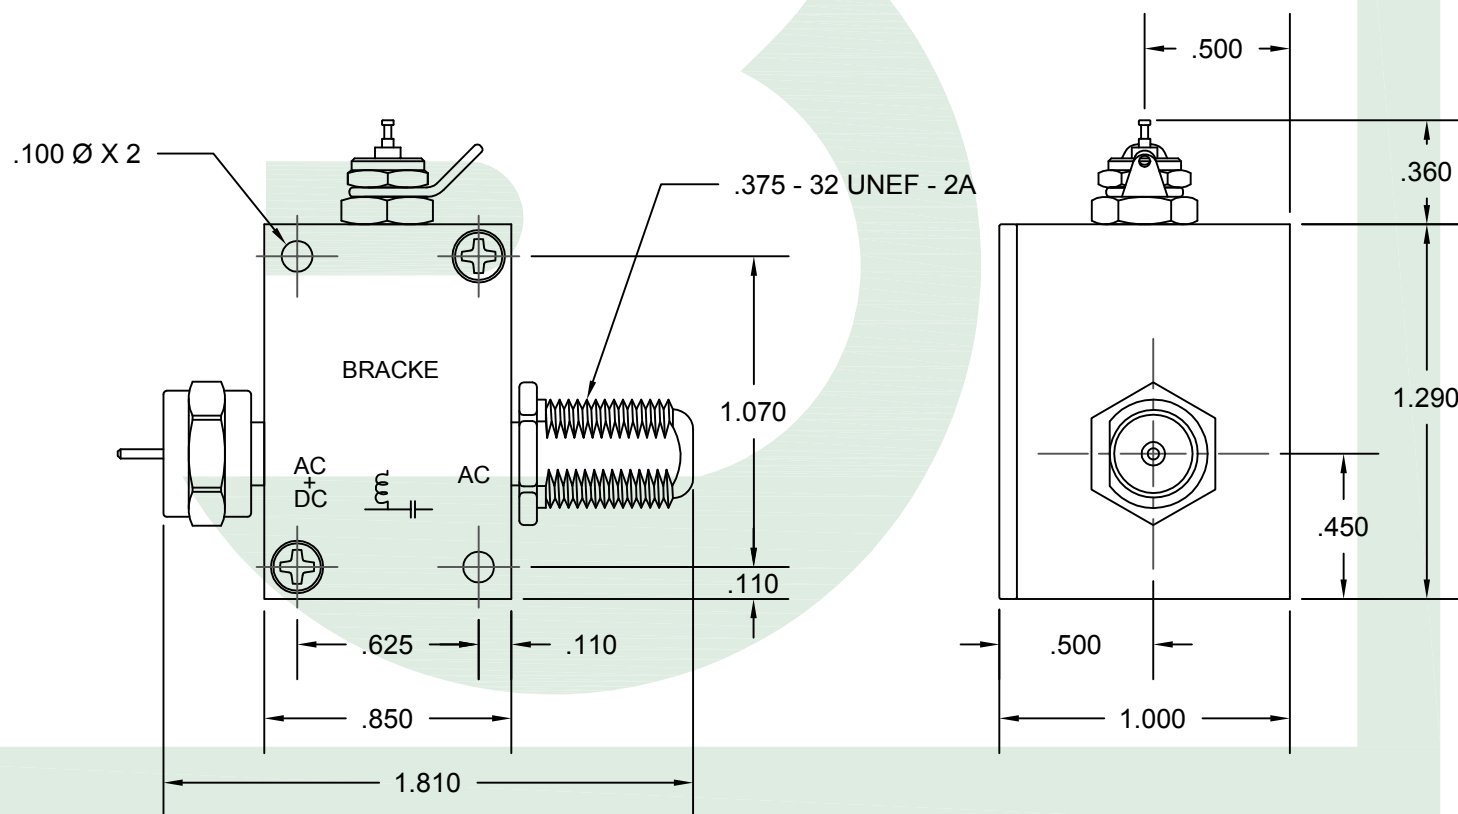

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description		CAGE / NAGE	
BM13219		75 Ohm F Solder Lug & Pin		6LOW2	
Frequency Range .03-3 GHz [Bias Tee]				Scale	Units
				1.5:1	Inches
Produced By	Checked By	Notes		Date	Revision
012	013	<ul style="list-style-type: none"> Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 		11/12/2013	A-01
		©2013 Bracke Manufacturing, LLC			