


M A T E R I A L S	MINI SMP CONNECTORS	BRASS GOLD PLATED
	BODY	PASSIVATED STAINLESS STEEL
	CONTACTS	GOLD PLATED
	INSULATOR	PTFE
E L E C T R I C A L S	IMPEDANCE (OHM)	50
	FREQUENCY RANGE (GHz)	DC - 26.5
	VSWR (MAX)	1.50:1
	INPUT POWER (WATT)	2
	ATTENUATION (dB)	10
	ACCURACY (dB)	+/- 1.2
	OPERATING TEMP. RANGE (°C)	-65 to +85



BRACKE
Bracke Manufacturing, LLC

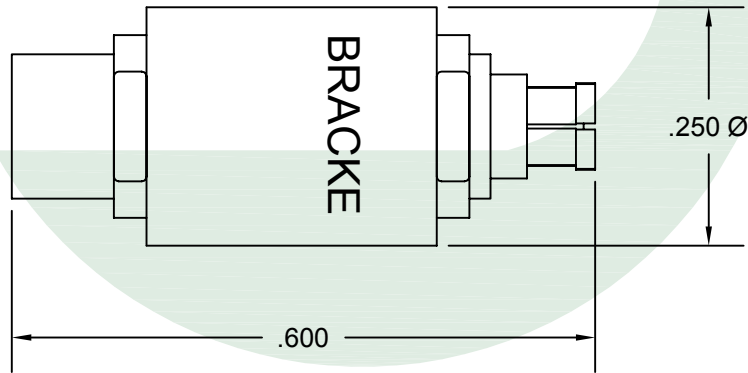

Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number		Description	CAGE / NAGE	
BM10088.10			6LOW2	
			Scale	Unit
			5:1	Inches
Produced By	Checked By	Notes	Date	Revision
002	013	<ul style="list-style-type: none">• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.• The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2016 Bracke Manufacturing, LLC	01/08/2016	A-01