
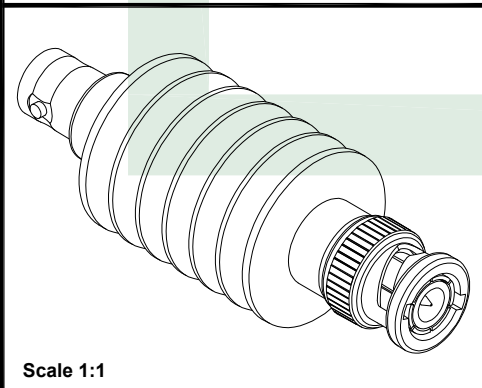



M A T E R I A L S	BNC CONNECTORS	BRASS NICKEL PLATED
	CONTACTS	GOLD PLATED
	INSULATORS	PTFE
	HOUSING	BLACK ANODIZED ALUMINUM
E P L R E O C P T E R R I T C I A E L S	IMPEDANCE (OHM)	50
	FREQUENCY RANGE (GHz)	DC - 4
	VSWR (MAX)	1.25:1
	INPUT POWER (WATTS)	10
	ATTENUATION (dB)	30
	ACCURACY (dB)	+/- 1.00
	OPERATING TEMP. RANGE (°C)	-65 to +125

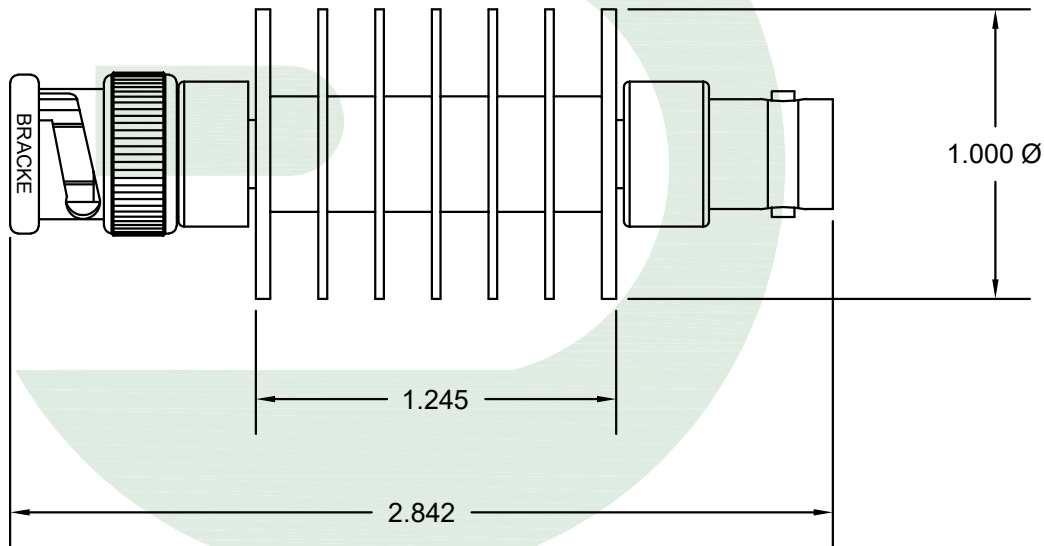

BRACKE

Bracke Manufacturing, LLC

Scale 1:1

 Bracke Manufacturing, LLC PO Box 12319 Newport Beach, Ca 92658 Phone (949)756-1600 / Fax (949) 756-1601 sales@brackemfg.com / www.brackemfg.com	Part Number		Description		CAGE / NAGE	
	BM10039.30		BNC Male to Female, 30 dB 50 Ohm [Attenuator, Max VSWR 1.25:1 @ 4 GHz]		6LOW2	
	Produced By	Checked By	Notes		Scale	Unit
	002	014			1.5:1	Inches
			• Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. ©2024 Bracke Manufacturing, LLC		Date	Revision
		1/05/2024			A-01	